


DOIT ESP32 DEVKIT V1 / PINOUT



PHYSICAL PIN	POSITIVE SUPPLY	DAC OUTPUTS	SPI PINS
CONTROL PINS	GROUND SUPPLY	TOUCH INPUTS	UART PINS
GPIO PINS	ADC INPUTS	I2C PINS	EXCLUDED PINS

- GPIO pins **34, 35, 36 and 39** are input only.
- TX0 and RX0 (**Serial0**) are used for serial programming.
- TX2 and RX2 can be accessed as **Serial2**.
- Default SPI is VSP1. Both VSP1 and HSP1 pins can be set to any GPIO pins.
- All GPIO pins support PWM and interrupts.
- Built-in LED is connected to **GPIO2**.
- Some GPIO pins are used for interfacing flash memory and thus are not shown.

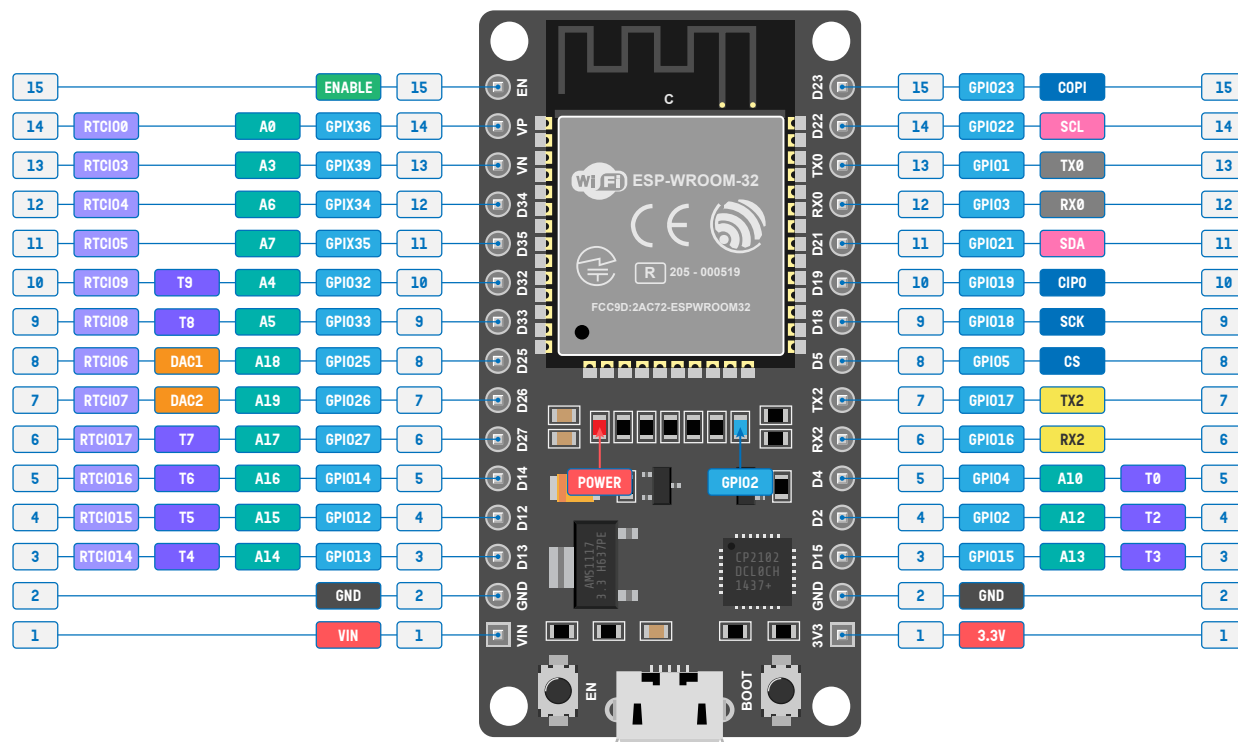

Rev. 0.1, 17-12-2022
Design: Vishnu Mohanan
This work is licensed under a Creative Commons
Attribution 4.0 International License.