

Position Control of a Two-Propeller Aeropendulum: A Comparison Between Voltage and Current Actuation

First Author^{1,2*}, Second Author^{2,3†} and Third Author^{1,2†}

^{1*}Department, Organization, Street, City, 100190, State, Country.

²Department, Organization, Street, City, 10587, State, Country.

³Department, Organization, Street, City, 610101, State, Country.

*Corresponding author(s). E-mail(s): iauthor@gmail.com;

Contributing authors: iauthor@gmail.com; iiiauthor@gmail.com;

[†]These authors contributed equally to this work.

Abstract

The abstract serves both as a general introduction to the topic and as a brief, non-technical summary of the main results and their implications. Authors are advised to check the author instructions for the journal they are submitting to for word limits and if structural elements like subheadings, citations, or equations are permitted.

Keywords: keyword1, Keyword2, Keyword3, Keyword4

1 Introduction

Control systems play a central role in the advancement of modern technologies by ensuring precision, stability, and operational efficiency even in the face of disturbances and severe dynamic conditions. However, translating abstract mathematical models encountered in academic settings into real-world solutions requires a rigorous alignment between theory and experimental validation—a connection that characterizes a persistent pedagogical and technical challenge in the development of new technologies. Aiming to mitigate this gap between academia and the practical demands of industry, recent investigations, such as those conducted by Antunes et al. [1], propose restructuring technical learning through methodologies based on practical and interdisciplinary projects. This approach is grounded in the strategic use of didactic platforms and testbeds, which emerge as a

fundamental link in control engineering by offering a safe, replicable, and low-cost environment to evaluate the performance of new algorithms before their effective transition to high-complexity applications.

Among the real-world applications requiring this high level of technical rigor, Unmanned Aerial Vehicles (UAVs) stand out. These systems rely heavily on robust control strategies capable of ensuring stability, precise trajectory tracking, and external disturbance rejection. The use of UAVs has expanded significantly across various strategic sectors. In precision agriculture, for instance, these aircraft are utilized for crop monitoring and multispectral analysis to directly assist in decision-making and intelligent crop management [2]. Similarly, in environmental and industrial monitoring, the integration of onboard sensors and high-resolution cameras contributes to the

advancement of autonomous navigation and situational perception of the environment [3]. To enable the autonomy required for these highly complex missions and to ensure aircraft integrity in dynamic operational scenarios, recent literature has focused efforts on advancing high-level control loops for navigation and guidance. In this regard, real-time collision avoidance solutions based on velocity constraints and short-range sensors have been proposed, validated through complex augmented reality setups and motion capture systems [4]. Similarly, advanced Model Predictive Control (MPC) algorithms structured around zonotopes and LMI matrices are explored to mitigate uncertainties in demanding tasks, such as suspended load transportation, relying on high-fidelity simulations within virtual environments like Gazebo and ROS [5]. Additionally, model-free approaches based on Integral Reinforcement Learning (IRL) have been suggested to coordinate the formation flight of multiple quadrotors, circumventing the severe non-linearities of the system through purely computational validations in the MATLAB environment [6]. Additionally, to handle actuator faults and environmental disturbances, intelligent strategies based on feedback linearization coupled with adaptive fuzzy logic and sliding mode control (SMC) are designed to guarantee attitude stability [7], while novel triple-power reaching laws optimized by particle swarm optimization (PSO) are proposed for fault tolerance in quadrotors [8]. However, transposing these investigations directly onto physical aerial platforms imposes severe practical barriers. The imminent risk of crashes, premature wear of electromechanical components, the high cost of tracking infrastructures, and the inherent complexity of implementing high computational-demand algorithms on embedded microcontrollers make direct experimental validation a risky and often unfeasible process for early stages of development.

In light of these limitations, the use of didactic platforms and physical testbeds consolidates itself as a strategic alternative for the practical study of aerospace dynamics, with the aeropen-dulum standing out among them. This system essentially consists of a rotational arm restricted to a single degree of freedom, driven by a motor-propeller assembly whose dynamics reproduce, in a simplified and faithful manner, the fundamental relationship between thrust, torque, and angular

movement present in rotary-wing aircraft [9, 10]. Thereby, the aeropen-dulum allows the investigation of critical stability phenomena, transient response, and disturbance rejection within a safe, replicable, and controlled environment.

However, the practical effectiveness of any algorithm designed for these platforms strictly depends on how the control action is handled at the lower actuator level. In propulsion systems based on DC or BLDC motors driven by commercial electronic speed controllers (ESCs), the standard low-level command interface traditionally operates by mapping the manipulated variable into a voltage signal via pulse-width modulation (PWM) [9, 10]. This voltage excitation strategy, although widely adopted due to its simplicity of implementation, introduces severe dynamic non-linearities arising from back-electromotive force, thermal variations in armature resistance, and the deadband behavior imposed by the static friction of the rotor [?]. Since the thrust forces and aerodynamic torques fundamental to the plant’s movement derive directly from the electromechanical torque—which bears a purely linear relationship with electrical current, and not with voltage—the imposition of a current control loop emerges as a critical alternative to linearize the actuation channel and accelerate the transient response of the system.

Despite these clear physical benefits, experimental research regarding the transition and direct impact between voltage and current actuation paradigms in low-level loops still constitutes a practical gap in the literature of compact aerospace testbeds. To bridge this gap, the present work adopts the aeropen-dulum as an experimental investigation platform. The primary contribution of this study resides in the development and rigorous comparison between the conventional voltage-oriented loop and a virtual current loop estimated and implemented entirely via software. Both actuation structures are evaluated under the action of a classical PID controller and an intelligent hybrid Fuzzy-PID architecture, clearly mapping the boundaries of energy efficiency and transient robustness of the plant.

2 Mathematical modeling

The physical structure of the twin-rotor aeropen-dulum can be conceptually mapped as a pendulum

system operating in the vertical plane. The rod is constrained to a single rotational degree of freedom around a fixed low-friction pivot. The primary dynamics are governed by Newton's Second Law for rotational systems, which establishes that the net angular acceleration is directly proportional to the sum of all external torques acting on the apparatus:

$$\sum \tau_i(t) = I_{\text{total}}\alpha(t) = I_{\text{total}}\ddot{\theta}(t) \quad (1)$$

where I_{total} represents the total mass moment of inertia of the rigid body about its fixed axis of rotation, $\theta(t)$ is the angular displacement relative to the vertical equilibrium position, and $\ddot{\theta}(t)$ denotes the mechanical angular acceleration.

To systematically derive the governing differential equations, the system is subjected to a comprehensive force and torque balance analysis. The schematic representation of the spatial distribution of the applied forces, coordinate systems, and geometric constraints is illustrated in Fig. 1.

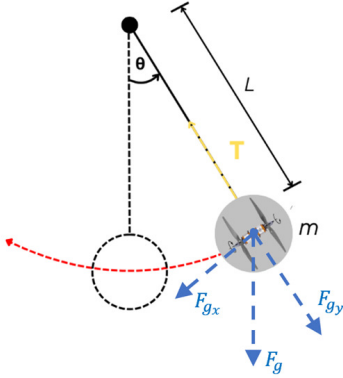


Fig. 1: Schematic diagram of the twin-rotor aeropendulum showing forces, dimensions, and angles.

As illustrated in Fig. 1, the structural setup is modeled as a mass m concentrated at the tip of a rigid rod of length L , deflected by an angle θ relative to the vertical equilibrium plane. The gravitational force $F_g = m_{\text{total}}g$ acting on the center of mass is decomposed into two orthogonal components: the radial force $F_{gy} = m_{\text{total}}g \cos \theta$, which acts along the longitudinal axis of the rod and is counterbalanced by the internal structural

tension force T , and the tangential force $F_{gx} = m_{\text{total}}g \sin \theta$. This tangential component acts perpendicularly to the rod, consistently pulling the system back toward the stable vertical rest position ($\theta = 0^\circ$).

By taking the pivot as the rotational origin and applying the principle of superposition to all coincident perpendicular effects, the dynamic torque balance equation is expressed as:

$$\tau_m(t) + \tau_r(t) + \tau_a(t) = I_{\text{total}}\ddot{\theta}(t) \quad (2)$$

where $\tau_m(t)$ represents the active net propulsive torque generated by the twin-propeller assembly at the tip, defined by the operational difference between the front and rear actuators ($\tau_m(t) = \tau_{m1}(t) - \tau_{m2}(t)$). The term $\tau_r(t)$ is the gravitational restoring torque directly derived from the tangential force component shown in the schematic diagram, defined as $\tau_r(t) = -LF_{gx} = -Lm_{\text{total}}g \sin \theta(t)$, where the negative sign denotes its restorative nature opposing the angular displacement. Finally, $\tau_a(t)$ is the non-conservative aerodynamic drag torque that models the atmospheric fluid resistance opposing the motion of the rod through the air, given by:

$$\tau_a(t) = -b\dot{\theta}(t) \quad (3)$$

where b denotes the rotational viscous damping coefficient and $\dot{\theta}(t)$ represents the instantaneous angular velocity of the plant.

The structural resistance to change in its rotational state, quantified by the total moment of inertia (I_{total}) about the rotation axis, must also be parameterized. This value is determined by combining the continuous mass distribution of the homogeneous rigid rod and the discrete masses of the two actuators located at its tip. Assuming a uniform mass distribution along the rod of length L and mass m_{haste} , and modeling the two BLDC motors as point masses of value m_{motor} located at a distance L from the pivot, the total equivalent moment of inertia is established via superposition as:

$$I_{\text{total}} = L^2 \left(\frac{1}{3}m_{\text{haste}} + 2m_{\text{motor}} \right) \quad (4)$$

Once all individual torque components acting on the mechanical structure and the geometric parameters are explicitly defined, they can be directly substituted into the general mechanical balance represented in (2). Consequently, the

full non-linear second-order ordinary differential equation that governs the twin-rotor aeropendulum dynamic behavior is obtained:

$$L^2 \left(\frac{1}{3} m_{\text{haste}} + 2m_{\text{motor}} \right) \ddot{\theta}(t) + b\dot{\theta}(t) + Lm_{\text{total}}g \sin \theta(t) = \tau_{m1}(t) - \tau_{m2}(t) \quad (5)$$

For the development of classical linear control architectures, the non-linear operating region can be linearized around the stable vertical equilibrium position ($\theta = 0^\circ$). Utilizing the small-angle Taylor approximation ($\sin \theta \approx \theta$), the fundamental expression reduces to a linear ordinary differential equation. By assuming that the structural lumped parameters can be aggregated as:

$$J = L^2 \left(\frac{1}{3} m_{\text{haste}} + 2m_{\text{motor}} \right) \quad (6)$$

$$K_g = Lm_{\text{total}}g \quad (7)$$

where J denotes the total equivalent moment of inertia and K_g represents the gravitational stiffness coefficient. Substituting (6) and (7) into the linearized formulation simplifies the equation of motion to:

$$J\ddot{\theta}(t) + b\dot{\theta}(t) + K_g\theta(t) = \tau_{m1}(t) - \tau_{m2}(t) \quad (8)$$

Assuming zero initial mechanical conditions ($\theta(0) = 0$ and $\dot{\theta}(0) = 0$), the application of the Laplace transform to this model maps the dynamics directly into the complex frequency s -domain. Ultimately, the open-loop transfer function $G(s)$ that establishes the dynamic relationship between the net propulsive torque input and the resulting angular position output $\Theta(s)$ fits seamlessly within a single column line, being rigorously derived as:

$$G(s) = \frac{\Theta(s)}{T_{m1}(s) - T_{m2}(s)} = \frac{1}{Js^2 + bs + K_g} \quad (9)$$

3 Experimental platform and parameter identification

To evaluate the mathematical formulations and validate the proposed control strategies, a dedicated experimental testbed was developed and

utilized in this work. The physical apparatus consists of a twin-rotor aeropendulum framework, illustrated in Fig. 2, designed for the study and benchmark of non-linear control techniques.

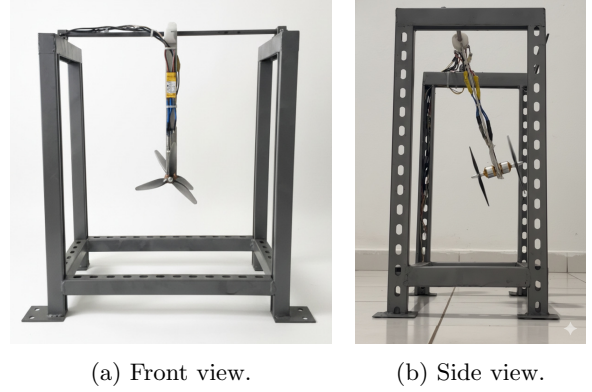


Fig. 2: The developed twin-rotor aeropendulum experimental platform from front and side perspectives.

The mechanical assembly isolates the plant's movement to a single rotational degree of freedom within the vertical plane. The main structural components, geometric constraints, and the instrumentation infrastructure are detailed below.

3.1 Mechanical and Hardware Architecture

The structural support consists of a rigid frame that holds the primary rotational shaft. To minimize frictional losses and guarantee that the plant dynamics are predominantly driven by the active aerodynamic inputs, the mechanical assembly is coupled to the fixed frame through low-friction bearings.

The primary physical and operational characteristics of the embedded subsystems are defined as follows:

- **Propulsion Subsystem:** Actuation is provided by two A2212/13T Brushless DC (BLDC) motors mounted back-to-back at the lower tip of a rigid aluminum rod ($L = 0.515$ m). Each motor is coupled to a $7 \times 4 \times 3$ polycarbonate tri-blade propeller. This assembly converts the digital control commands into active differential

thrust forces perpendicular to the longitudinal axis of the rod.

- **Processing and Control Unit:** The computational core is driven by an ATmega2560 microcontroller (Arduino Mega platform). This unit is responsible for executing the real-time digital filtering routines, processing the control laws, and generating the independent high-resolution Pulse Width Modulation (PWM) signals dispatched to the Electronic Speed Controllers (ESCs). The control loop runs at a fixed sampling period, and data communication with the host computer is established via a bidirectional USB/Serial interface.
- **Sensors and Interface Subsystems:** The angular position $\theta(t)$ is acquired through a high-precision rotary potentiometer attached directly to the main pivot axis, selected due to its high linearity and noise immunity.
- **Power Supply Unit:** To ensure voltage stability and satisfy the strict current demands during high-acceleration transients, the entire platform is powered by a regulated 10 V, 30 A switched-mode power supply (SMPS).
- **Supervisory and Graphical User Interface (GUI):** A dedicated telemetry and supervisory software system was developed to mediate the experimental verification procedures. Operating over the bidirectional serial communication channel, this graphical interface allows the real-time configuration of setpoints and control parameters while simultaneously logging the estimated variables, sensor measurements, and actuator efforts for post-processing and dynamic analysis.

3.2 System Parameter Identification

Based on the physical construction and geometric synthesis of the prototype, the core structural and dynamic variables of the system were successfully determined. The mass elements and physical lengths were measured directly from the experimental apparatus, while parameters such as the total mass moment of inertia (I_{total}) and the experimental rotational viscous damping coefficient (b) were obtained through analytical formulations and free-oscillation dynamic tests, respectively.

The complete set of identified physical constants and operational parameters that govern

the aeropendulum dynamics is consolidated in Table 1.

Table 1: Physical and identified parameters of the developed aeropendulum platform

Parameter	Value	Unit
Motor mass ($m_1 = m_2$)	0.052	kg
Rod mass (m_{haste})	0.100	kg
Total moment of inertia (I_{total})	0.0173	kg·m ²
Rotational viscous damping coefficient (b)	0.3944	N·m·s/rad
Acceleration of gravity (g)	9.8	m/s ²
Rod length (L)	0.36	m

4 Input signal interpretation and actuation dynamics

In phenomenological modeling, the input is conventionally defined by the pure net aerodynamic torque developed by the propulsion units. However, from a practical control systems perspective, the actuators cannot be directly driven by a torque command. Instead, they must be excited via voltage or current variables. This section establishes the mathematical and experimental formulations for two distinct actuation paradigms: voltage-based equivalent actuation and estimated current-based actuation. These formulations redefine the open-loop plant inputs, establishing the basis for the comparative analysis.

4.1 Voltage-Based Actuation Dynamics

The operation of Brushless DC (BLDC) motors relies on the electromagnetic interaction between the stator windings and the permanent magnet rotor. The fundamental torque generation is structurally governed by the motor torque constant (K_t), which linearly relates the mechanical torque to the armature current (i_a):

$$\tau(t) = K_t i_a(t) \quad (10)$$

noindent where K_t is the motor torque constant, which is inversely proportional to the motor velocity constant (K_v , specified by the manufacturer as 1000 RPM/V for the actuators utilized in this platform) according to the structural relation:

$$K_t = \frac{60}{2\pi K_v} \approx 0,00955 \text{ N} \cdot \text{m/A} \quad (11)$$

To establish a direct practical relationship between the applied terminal voltage (V) and the resulting torque (τ), this work proposes an experimental characterization based on steady-state equilibrium conditions. Under this framework, we propose that the armature current $i_a(t)$ can be correlated to the structural angular displacement $\theta(t)$ attained by the aeropendulum through an empirical proportionality coefficient K_{fi} :

$$i_a(t) = K_{fi}\theta(t) \quad (12)$$

Concurrently, we propose a secondary linear relationship to link the steady-state angular displacement to the equivalent average terminal voltage ($V(t)$) applied to the Electronic Speed Controllers (ESCs). This correlation is defined by the coefficient K_{fv} as follows:

$$\theta(t) = K_{fv}V(t) \quad (13)$$

By combining these proposed steady-state relations, the active torque produced by an isolated motor can be coupled to its terminal voltage input through a lumped equivalent voltage-to-torque gain ($K_{\text{equivalent}}$):

By substituting (13) into (12), and the result into the fundamental torque relation (10), the active torque produced by an isolated motor can be directly coupled to its terminal voltage input through a lumped equivalent voltage-to-torque gain ($K_{\text{equivalent}}$):

$$\tau(t) = K_t K_{fi} K_{fv} V(t) = K_{\text{equivalent}} V(t) \quad (14)$$

To parameterize this model for the bidirectional setup, systematic experimental calibration procedures were conducted. Specific Pulse Width Modulation (PWM) duty cycles were applied stepwise to the front and rear actuators. The corresponding armature current, equivalent terminal voltage, and steady-state angular deflections were recorded.

Linear regression algorithms were applied to the experimental curves, mapping the correlation parameters. The calculated gains K_{fi} , K_{fv} , and the resulting lumped $K_{\text{equivalent}}$ parameters for both propulsion units are consolidated in Table 2.

Table 2: Static calibration parameters for voltage actuation

Actuator	K_{fi} (A/°)	K_{fv} (°/V)	$K_{\text{equivalent}}$ (N · m/V)
Front	0,053252	8,26146	0,00420
Rear	-0,121940	-5,11253	0,00595

Thus, by applying the algebraic difference between the independent actuators, the net voltage-driven propulsive torque command is defined as $\tau_{m1}(t) - \tau_{m2}(t) = K_{\text{equivalent},1}V_1(t) - K_{\text{equivalent},2}V_2(t)$.

4.2 Current-Based Actuation Dynamics

Unlike the voltage paradigm where torque coupling is indirect and relies on multi-stage linear approximations—current-based actuation leverages the direct, uncoupled physical relationship between armature current and torque expressed in (10). Actuating the plant via current provides a more linear control loop, as it inherently diminishes the back-electromotive force (Back-EMF) variations and armature resistance thermal dependencies.

Since the experimental platform lacks integrated real-time physical current sensors on its embedded hardware, a virtual current sensing loop was developed in software. To establish this sensorless framework, a preliminary steady-state empirical characterization was executed to map the relationship between the applied control variable (PWM) and the resulting armature current (I).

The experimental curves obtained within the full operational envelope revealed a highly linear correlation for both actuators in steady-state, mathematically modeled as:

$$I(t) = a \cdot PWM(t) + b \quad (15)$$

where a and b represent the empirical slopes and offsets, respectively. The identified parametric functions for each propulsion unit are summarized in Table 3.

For the physical embedded implementation, this mapping is inverted inside the processing unit to establish the virtual current loop. The software execution framework processes the demanded reference current (I_{ref}) for each motor and maps it

Table 3: Identified PWM-to-Current calibration functions

Actuator	Calibration Function $I(t) = a \cdot \text{PWM}(t) + b$
Front	$I_1(t) = 0.006427 \cdot \text{PWM}_1(t) - 7.139481$
Rear	$I_2(t) = 0.007061 \cdot \text{PWM}_2(t) - 7.643550$

into a corresponding digital command through the following static inversion sequence:

1. The algorithm takes the desired current variable, $I_{\text{ref}}(t)$, which acts as the intermediate control input for the actuation subsystem.
2. The software execution loop applies the analytical inverse of the experimentally identified linear functions to convert this reference current into its corresponding digital PWM duty cycle:

$$\text{PWM}(t) = \frac{I_{\text{ref}}(t) - b}{a} \quad (16)$$

where a and b represent the specific empirical parameters of the respective actuator, as consolidated in Table 3.

3. The computed duty cycle is directly dispatched to the microprocessor internal timers to synthesize the physical hardware signal that drives the ESCs.

This procedure implements a virtual current loop entirely in software, simulating the behavior of a physical current-driven actuator without the need for real-time sensing infrastructure.

This methodology successfully implements an indirect virtual current loop in software, replicating the performance of a cascaded hardware control topology without requiring real-time physical current sensing infrastructure.

5 Control system design

This work proposes and evaluates two distinct control paradigms to regulate the angular position of the twin-rotor aeropendulum: a classical Parallel Linear Proportional-Integral-Derivative (PID) controller and an intelligent hybrid Fuzzy-PID controller. Both architectures are independently implemented and compared under both voltage and virtual current actuation frameworks, mapping the performance boundaries of each combination.

5.1 Classical PID Control Design and Tuning

The classical position control loop is structured around a parallel linear PID topology. The synthesis utilizes the open-loop transfer functions derived for current actuation ($G_1(s)$) and voltage actuation ($G_2(s)$), expressed as:

$$G_1(s) = \frac{\Theta(s)}{T_{m1}(s) - T_{m2}(s)} = \frac{K_t/I_{\text{total}}}{s^2 + \frac{b}{I_{\text{total}}}s + \frac{a}{I_{\text{total}}}} \quad (17)$$

$$G_2(s) = \frac{\Theta(s)}{V_1(s) - V_2(s)} = \frac{(K_1 + K_2)/I_{\text{total}}}{s^2 + \frac{b}{I_{\text{total}}}s + \frac{a}{I_{\text{total}}}} \quad (18)$$

The characteristic polynomial of the linearized system yields two distinct, real negative poles. This overdamped operational profile meets the structural criteria for the classic open-loop S-curve Ziegler–Nichols (ZN) tuning methodology. To establish a baseline configuration, the plant was tuned under this criterion, yielding the initial controller parameters consolidated in Table 4.

Table 4: Initial Ziegler–Nichols baseline parameters for the PID controller

Control Framework	K_p	K_i	K_d
Voltage Proportional	1.495	2.889	0.129
Virtual Current	0.641	0.155	0.664

The direct digital deployment of the uncalibrated ZN baseline parameters resulted in a sluggish tracking response that failed to satisfy the transient criteria established for the physical platform (such as a settling time near 10 s and negligible overshoot).

To resolve this limitation and maximize trajectory robustness, a systematic empirical fine-tuning procedure was executed over the initial states. For the voltage control loop, a uniform multiplication factor was applied across all three parallel channels, where a tenfold increase ($\times 10$) optimized the rise time without triggering oscillatory degradation. Conversely, for the virtual current architecture, the low initial integral action induced

severe steady-state settling delays; therefore, a selective multiplier ($\times 200$) was applied exclusively to the integral gain (K_i) to eliminate the permanent steady-state error. The final optimized operational gains are presented in Table 5.

Table 5: Final optimized parallel PID gains after empirical refinement

Control Framework	K_p	K_i	K_d
Voltage Proportional	14.950	28.890	1.293
Virtual Current	0.641	31.000	0.664

The necessity for these substantial empirical scaling factors over the analytical ZN baseline stems from unmodeled physical non-linearities and practical hardware constraints inherently absent in the linearized design models. First, the physical pivot mechanism exhibits non-linear static friction that introduces a deadband effect; the original, conservative ZN integral gains were insufficient to accumulate the tracking error fast enough to overcome this initial resistive torque, resulting in an excessively sluggish, dragged response. Second, the propulsion units introduce aerodynamic latency and actuator settling delays during transient thrust generation. In the voltage-driven configuration, a uniform amplification effectively counteracted the unmodeled dynamic attenuation of the ESC-motor-propeller subsystem. Conversely, within the virtual current loop framework, the current reference is mapped algebraically in software without active sensor feedback; thus, a highly aggressive integral scaling was required to accelerate the error accumulation, forcing the actuator to overcome both aerodynamic inertia and permanent steady-state offsets within the targeted operational settling time.

5.2 Adaptive Fuzzy-PID Control Design

To enhance tracking robustness against parameter variations and unmodeled non-linear dynamics, an adaptive hybrid Fuzzy-PID controller is synthesized. Unlike classical structures with fixed parameters, the proposed architecture updates the proportional (K_p), integral (K_i), and derivative (K_d) gains in real-time. The block topology uses

a Mamdani-type Fuzzy Inference System (FIS) acting as an online tuning mechanism over the nominal parallel baseline gains (K_{p0}, K_{i0}, K_{d0}) established in Table 5.

The real-time adaptation mechanism is mathematically governed by three dimensionless multiplicative scaling vectors ($\alpha_p, \alpha_i, \alpha_d$), defined as follows:

$$K_p(t) = \alpha_p(t) \cdot K_{p0} \quad (19)$$

$$K_i(t) = \alpha_i(t) \cdot K_{i0} \quad (20)$$

$$K_d(t) = \alpha_d(t) \cdot K_{d0} \quad (21)$$

The FIS operates via two continuous crisp inputs: the tracking position error $e(t) = \theta_{\text{ref}}(t) - \theta(t)$ and its discrete finite-difference derivative $\dot{e}(t)$. Both input domains are mapped into three linguistic variables: Negativo (N), Zero (Z), and Positivo (P). The internal cross-coupled heuristic knowledge base consists of 9 linguistic IF-THEN rules deduced empirically from simulation behaviors, structured to minimize oscillations while accelerating transient recovery. The uniform rule base is consolidated in Table 6.

Table 6: Heuristic rule base for the adaptive Fuzzy-PID inference system

Error (e)	Derivative ($\dot{e}$)	α_p	α_i	α_d
Negativo	Negativo	Médio	Baixo	Alto
Negativo	Zero	Médio	Médio	Médio
Negativo	Positivo	Médio	Baixo	Alto
Zero	Negativo	Baixo	Médio	Alto
Zero	Zero	Médio	Médio	Médio
Zero	Positivo	Baixo	Médio	Alto
Positivo	Negativo	Médio	Baixo	Alto
Positivo	Zero	Médio	Médio	Médio
Positivo	Positivo	Médio	Baixo	Alto

To balance computational efficiency and smooth interpolation boundaries across the operational space, four-parameter trapezoidal membership functions $\mu(x) = [x_1, x_2, x_3, x_4]$ are implemented for the output channels. The physical constraints and explicit boundary coordinates assigned to each linguistic output region are summarized in Table 7.

The aggregated fuzzy outputs are mapped back into crisp real-time correction factors using the standard center-of-gravity defuzzification method. This adaptive structure is seamlessly

Table 7: Membership function coordinates for the fuzzy scaling outputs

Output Factor	Linguistic Region	Numerical Parameters (x_1, x_2, x_3, x_4)
$\alpha_p \in [0, 1]$	Baixo	[0.10, 0.10, 0.20, 0.30]
	Médio	[0.20, 0.40, 0.60, 0.80]
	Alto	[0.70, 0.85, 1.00, 1.00]
$\alpha_i \in [0.3, 1.5]$	Baixo	[0.30, 0.50, 0.60, 0.80]
	Normal	[0.75, 0.82, 1.18, 1.26]
	Alto	[1.18, 1.25, 1.42, 1.50]
$\alpha_d \in [0, 1]$	Baixo	[0.095, 0.171, 0.280, 0.370]
	Médio	[0.370, 0.420, 0.550, 0.640]
	Alto	[0.640, 0.710, 0.820, 1.000]

a unified execution architecture was developed within the processing unit. The operational signal flow governing this real-time implementation is mapped in Fig. 3.

The finalized controller parameters utilized throughout the experimental campaign are consolidated in Table 8. The heuristic fuzzy rules and output boundaries established in Section 3 remained unaltered, with gain tuning managed in real-time via the developed supervisory graphical user interface.

wrapped around both the equivalent voltage distribution loop and the virtual current loop to compare transient performance bounds under identical physical excitations.

6 Results and discussion

7 Experimental Results and Discussion

This section presents the experimental performance analysis of the twin-rotor aeropendulum under four distinct operational conditions angular step references, evaluated both with and without external disturbances. In each scenario, the classical parallel PID and the adaptive hybrid Fuzzy-PID controllers are comprehensively benchmarked under both equivalent voltage and virtual current actuation frameworks.

7.1 Experimental Parameters and Signal Flow Architecture

The baseline parameters obtained during the simulation stage served as the initial state for the physical embedded system. However, during real-time deployment, minor empirical adjustments were required to compensate for physical motor asymmetries, structural measurement noise, and aerodynamic non-linearities.

The discrepancy between simulation and experimental parameters is primarily attributed to the current actuation framework. While the analytical model considers the armature current directly via the torque constant (K_t), the physical microprocessor outputs a digital PWM duty cycle proportional to the estimated variable. To bridge this gap and coordinate the physical experiments,

Table 8: Final controller parameters applied during the experimental verification

Controller Architecture	K_p	K_i	K_d
PID – Voltage Framework	5.00	10.00	0.200
PID – Virtual Current Framework	0.05	0.03	0.009
Fuzzy-PID – Voltage Baseline	5.00	10.00	0.200
Fuzzy-PID – Current Baseline	0.05	0.03	0.009

7.2 Transient Tracking under Step References ($\pm 20^\circ$)

To evaluate the tracking capability and operational symmetry of the architectures, a step reference of $\pm 20^\circ$ was injected at $t = 10$ s from a steady state of repose. The real-time angular displacement tracking performance over a 60 s horizon is illustrated in Fig. 4. Concurrently, the respective actuator efforts representing the generated control signals are presented in Fig. 5.

To provide a thorough quantitative validation, Table 9 details the classical transient performance indicators, while Table 10 consolidates the integral error criteria—namely the Integral Absolute Error (IAE), Integral Squared Error (ISE), Integral Time Absolute Error (ITAE)—along with the Integral of Squared Structure Control (ISSC) to measure energetic efficiency.

7.3 Comparative Analysis and Discussion

The joint analysis of the transient tracking profiles exposes significant behavioral divergence between the equivalent voltage and virtual current frameworks. Under both reference polarities, the voltage-driven PID achieved the fastest rise



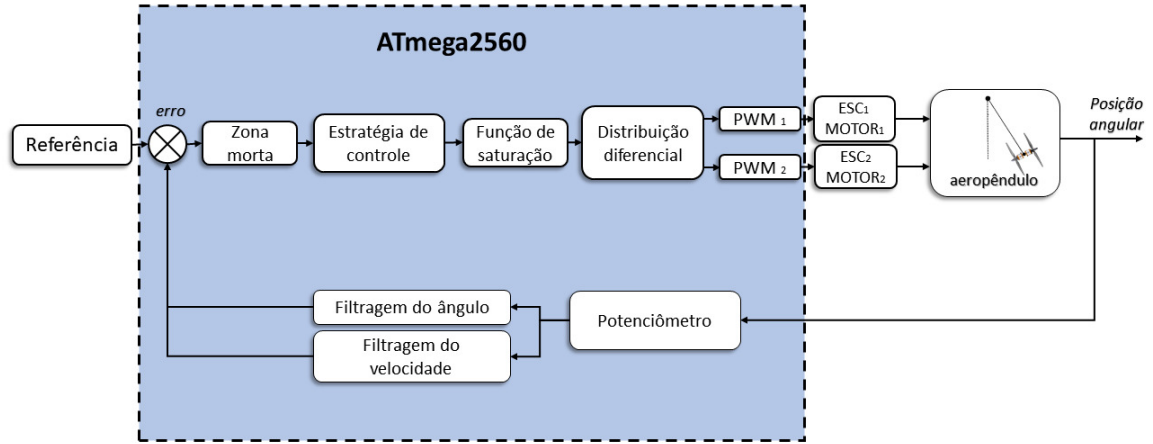


Fig. 3: Real-time signal flow and operational block diagram of the embedded control loop execution.

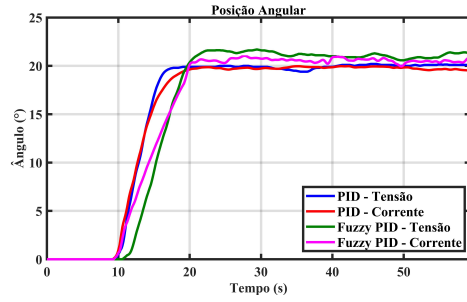


(a) Positive step reference ($+20^\circ$).

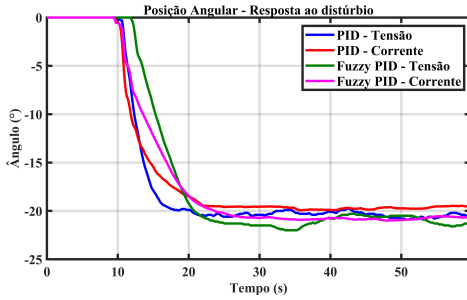


(b) Negative step reference (-20°).

Fig. 4: Experimental angular displacement tracking performance under positive and negative step references.

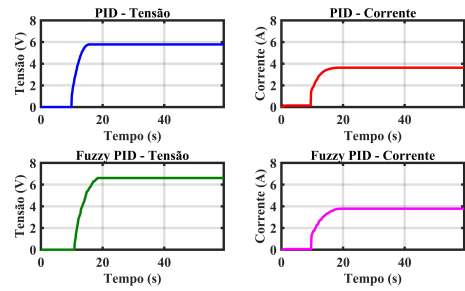

(a) Positive step ($+20^\circ$).

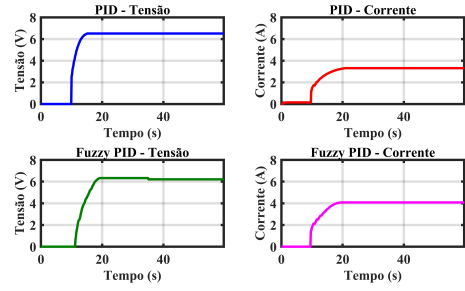

(b) Negative step (-20°).

Fig. 5: Real-time control effort signals dispatched to the propulsion units under step references.

Table 9: Combined transient performance metrics for voltage and current frameworks

Setpoint	Actuation	Controller	$\theta_{\text{pico}} (^{\circ})$	$\theta_{\text{final}} (^{\circ})$	O_s (%)
+20°	Tensão	PID	20.20	20.10	0.50
	Tensão	Fuzzy-PID	21.70	21.34	1.67
	Corrente	PID	19.97	19.60	1.90
	Corrente	Fuzzy-PID	21.04	20.49	2.67
−20°	Tensão	PID	−20.90	−20.33	2.78
	Tensão	Fuzzy-PID	−22.00	−21.46	2.51
	Corrente	PID	−19.94	−19.50	2.23
	Corrente	Fuzzy-PID	−20.99	−20.64	1.71

Table 10: Integrated performance error indices and energetic control efforts

Setpoint	Actuation	Controller	IAE	ISE	ITAE	ISSC
+20°	Tensão	PID	66.050	746.64	940.03	1571.73
	Tensão	Fuzzy-PID	134.324	1263.10	2957.58	1966.19
	Corrente	PID	79.833	845.22	1214.70	1100.96
	Corrente	Fuzzy-PID	114.673	1104.99	2089.93	1663.74
−20°	Tensão	PID	69.792	726.48	1288.53	2040.42
	Tensão	Fuzzy-PID	127.793	1201.39	2851.11	1758.59
	Corrente	PID	81.828	705.85	1407.06	1000.19
	Corrente	Fuzzy-PID	118.342	1070.72	2358.39	775.60

times ($t_r = 4.78$ s for +20° and $t_r = 4.51$ s for −20°), showcasing a highly responsive initial acceleration. However, this snappy behavior comes at the expense of substantial energetic aggression, as evidenced by the high ISSC values (1571.73 and 2040.42, respectively). This high-frequency saturation behavior poses a strict structural demand over the motor-ESC modules.

Conversely, the current-driven loop attenuates this initial aggressiveness, providing slightly longer rise times but significantly shrinking the global settling time (t_s). For instance, under a positive step, the current-driven PID achieved a settling time of 18.54 s, a 50.4% reduction compared to the 37.39 s boundary observed in the voltage framework. More importantly, the current-driven framework achieved a drastic mitigation in control energy expenditure, dropping the ISSC to 624.77 (a 60.2% energy saving). This phenomenon validates that embedding the linear current-to-torque conversion dynamics inside the execution software successfully minimizes the asymmetric thrust saturation caused by aerodynamic variations in the propellers.

The advantages of the proposed virtual current loop become remarkably prominent when paired with the intelligent adaptive Fuzzy-PID controller.

For a +20° trajectory, shifting from voltage to current actuation caused the integral criteria to plunge: IAE dropped from 134.32 to 114.67, ITAE decreased from 2957.58 to 2089.93, and the electrical stress index (ISSC) fell by 66.2%, from 1966.19 down to 663.74. Symmetrical decoupling is observed for the negative step (−20°), where current-loop cascade mapping cut the settling time from 53.74 s to 25.06 s while slashing the energetic effort from 1758.59 to 775.60.

Consequently, the experimental results demonstrate that interpreting the control variable as an estimated armature current consistently delivers superior global damping, transient precision, and electrical stability. Among all analyzed combinations, the current-driven Fuzzy-PID architecture establishes the most effective engineering trade-off between transient response agility and operational efficiency.

8 Conclusion and future work

——— daqui para baixo é do template, não apaguei porque estou usando a estrutura para table and equations ———

Supplementary information. If your article has accompanying supplementary file/s please state so here.

Authors reporting data from electrophoretic gels and blots should supply the full unprocessed scans for key as part of their Supplementary information. This may be requested by the editorial team/s if it is missing.

Please refer to Journal-level guidance for any specific requirements.

Acknowledgements. Acknowledgements are not compulsory. Where included they should be brief. Grant or contribution numbers may be acknowledged.

Please refer to Journal-level guidance for any specific requirements.

Declarations

Some journals require declarations to be submitted in a standardised format. Please check the Instructions for Authors of the journal to which

you are submitting to see if you need to complete this section. If yes, your manuscript must contain the following sections under the heading ‘Declarations’:

- Funding
- Conflict of interest/Competing interests (check journal-specific guidelines for which heading to use)
- Ethics approval and consent to participate
- Consent for publication
- Data availability
- Materials availability
- Code availability
- Author contribution

If any of the sections are not relevant to your manuscript, please include the heading and write ‘Not applicable’ for that section.

Editorial Policies for:

Springer journals and proceedings:

<https://www.springer.com/gp/editorial-policies>

Nature Portfolio journals: <https://www.nature.com/nature-research/editorial-policies>

Scientific Reports: <https://www.nature.com/srep/journal-policies/editorial-policies>

BMC journals: <https://www.biomedcentral.com/getpublished/editorial-policies>

An appendix contains supplementary information that is not an essential part of the text itself but which may be helpful in providing a more comprehensive understanding of the research problem or it is information that is too cumbersome to be included in the body of the paper.

References

- [1] Antunes, A.R., Herdies, G.R., Ceolin, J.C., Azzolin, G.S., Jacobi, L.F., Filho, A.C., Santos, G.Q., Bellinaso, L.V.: Improving control systems education in brazilian engineering programs through an iterative project-based learning approach. *Journal of Control, Automation and Electrical Systems* **37**(1), 25–36 (2026)
- [2] Anziliero, D.: As técnicas de monitoramento por vant: Uma revisão dos resultados obtidos na agricultura. *Epitaya E-books* **1**(10), 34–47 (2021)
- [3] Policarpo, V.A.: Câmara de eventos em ambiente simulado e um estudo de caso de aplicação para vant em sistemas ilpf (integração lavoura-pecuária-floresta). PhD thesis, Universidade de São Paulo (2025)
- [4] Ricardo Jr, J.A., Silva, J.F., Santos, D.A.: Robust collision-free guidance for multirotor aerial vehicles under short-range sensors. *Journal of Control, Automation and Electrical Systems* **35**(4), 649–661 (2024)
- [5] Andrade, R., Ferramosca, A., Normey-Rico, J.E., Raffo, G.V.: Tube-based explicit model predictive control for a tiltrotor uav in cargo transportation tasks. *Journal of Control, Automation and Electrical Systems* **35**(6), 1039–1058 (2024)
- [6] Dinh, G.K., Thi, V.H.N., Dao, P.N.: Model-free optimal formation control strategy for multiple quadrotors. *Journal of Control, Automation and Electrical Systems* **36**(5), 814–824 (2025)
- [7] Aghazamani, A.M., Khodabandeh, M.: Position tracking control of a quadrotor using a fuzzy adaptive feedback linearization controller. *Journal of Control, Automation and Electrical Systems* **36**(2), 193–206 (2025)
- [8] Benayad, N., Aouiche, A., Djeddi, A.: Hybrid fault-tolerant sliding mode controller for unmanned aerial vehicle quadrotor based on optimized novel triple power reaching law. *Journal of Control, Automation and Electrical Systems* **36**(5), 825–848 (2025)
- [9] Tanveer, M.H., Koduru, C., Roy, R.G., Lakhekar, G.V., Chun, C.: A robust control technique for pitch control of an aeropendulum. In: 2023 6th International Conference on Robotics, Control and Automation Engineering (RCAE), pp. 257–261 (2023). IEEE
- [10] Rojas-Galván, R., García-Martínez, J.R., Cruz-Miguel, E.E., Barra-Vázquez, O.A.,

Olmedo-García, L.F., Rodríguez-Reséndiz, J.: Hunting search algorithm-based adaptive fuzzy tracking controller for an aeropendulum. *Technologies* **12**(5), 63 (2024)