

# An Event Based Representation for Oil Reservoir Simulation using Preconceptual Schemas.

Steven Velásquez<sup>a,\*</sup>, Juan M. Mejía<sup>b</sup>, Carlos M. Zapata<sup>c</sup>

<sup>a</sup>*National University of Colombia, Medellin. Department of Computer and Decision Science.*

<sup>b</sup>*National University of Colombia, Medellin. Department of Processes and Energy.*

<sup>c</sup>*National University of Colombia, Medellin. Department of Computer and Decision Science.*

---

## Abstract

Oil reservoir simulation is governed by mass conservation laws. In such laws, flow, accumulation, sources and sinks phenomena in porous media are described. Multiple proposals for frameworks and simulations elaboration have been defined. However, those lack concepts and processes tracing, and event representation for physical phenomena. Preconceptual Schema (PS) is used for including the complete structure of an application domain and representing processes emerging in such. Cohesion, consistency, and tracing between concepts and processes is obtained by using PS. In this article, an executable model for Black oil simulation based on a preconceptual schema is proposed. The executable model is validated by running a study case. The results are in accordance with data reported in the literature. The proposed executable model allows for tracing consistently the concepts, processes, and events, which are present in Oil reservoir simulation [1].

*Keywords:* Porous Media, Executable Models, Preconceptual Schemas, Oil Reservoir Simulation, Event based Representation.

---

## 1. Introduction

Oil Reservoir simulation is an application of flow in porous media. Macroscopic fluid displacement through a porous rock is studied in such application. Those displacements are due to pressure, saturation, capillary and gravitational changes. Such phenomena are described by mass  
5 and momentum conservation laws, which are expressed as a coupled system of differential equations.

---

\*Corresponding author

Email address: svelasquezc@unal.edu.co (Steven Velásquez)

The black oil model (BOM) is vastly used in industrial efforts. Transport of three fluids at standard conditions is considered in this model. In addition, sink and source terms are involved, which are modeled as wells. Analytic solutions of BOM are unfeasible, hence a numerical solution  
10 is required. With this purpose, an spatial and temporal discretization is applied to BOM system of differential equations, the resulting algebraic system is solved using Newton-Raphson method.

Mathematical models, such as Black Oil Model (BOM), are representations that appear in every effort for developing a simulator or framework for oil reservoir simulation. In addition, other repre-  
15 sentations in which, concepts and processes are shown, lack of traceability and event representation. There are proposals in which traceability is considered, but those are implementation-specific. The whole converges in oil reservoir simulators being developed in an empirical manner.

Preconceptual schemas (PS) are intermediate representations which are useful for establishing  
20 a common point of understanding between a stakeholder and a software analyst. Furthermore, PS have elements which allow to represent both structure and dynamics of specific application domains. Moreover, Calle and Noreña [2], extended PS notation for usage in scientific software contexts, which have a greater complexity.

Norena, Calle and Zapata [2, 3, 4, 5, 6, 7], present PS potential for representing different appli-  
25 cation domains in scientific software contexts. In their representations, cohesion and traceability between concepts is maintained. Additionally, the whole process is traced in the elaborated PS. In this work, we present the development of an event based representation for oil reservoir simulation using Preconceptual Schemas. The developed representation consists of eight principal concepts,  
30 three events which process a simulation, and multiple functions in which reusable portions of representation are used within the PS.

This paper is organized as follows: In Section 2, we present the Black oil model formulation, its solution method, and PS notation. Section 3 consists of a PS representation showing the main  
35 concepts and processes in oil reservoir simulation. In Section 4, we present a translation to C++ and a study case for validating our representation. Lastly, Section 5, we state some conclusions and we propose some guidelines for the continuance of our work.

## 2. Materials and Methods

In this section we review the elements required for our representation of the oil reservoir simulation domain. Accordingly, we state the mathematical model which we solve, including its solution method; and we present the preconceptual schema notation.

### 2.1. Mathematical Model

An extended version of Black Oil Model (BOM) is presented here. BOM is a system of partial differential equations for three phases: oil (o), gas (g), and water (w), based on volumetric conservation laws at atmospheric temperature and pressure [8, 9, 10, 11]. Solving BOM equations, for a spatial domain  $\Omega$  and a time domain  $\Theta$ , requires finding pressure ( $P_f(x, t)$ ) and saturation ( $S_f(x, t)$ ) fields, with  $x \in \Omega$ ,  $t \in \Theta$  and  $f \in \{o, g, w\}$ , which satisfy the following:

$$\left. \begin{aligned} \frac{\partial}{\partial t} \left[ \phi \left( \frac{S_o}{B_o} + \frac{R_v S_g}{B_g} \right) \right] - \nabla \cdot \left( \frac{1}{B_o} \vec{u}_o + \frac{R_v}{B_g} \vec{u}_g \right) - \tilde{q}_o &= 0 \\ \frac{\partial}{\partial t} \left[ \phi \left( \frac{S_g}{B_g} + \frac{R_s S_o}{B_o} \right) \right] - \nabla \cdot \left( \frac{1}{B_g} \vec{u}_g + \frac{R_s}{B_o} \vec{u}_o \right) - \tilde{q}_g &= 0 \\ \frac{\partial}{\partial t} \left[ \phi \left( \frac{S_w}{B_w} \right) \right] - \nabla \cdot \left( \frac{1}{B_w} \vec{u}_w \right) - \tilde{q}_w &= 0 \end{aligned} \right\} \quad \text{in } \Omega \quad (1)$$

$$\vec{u}_f \cdot \vec{n} = 0, \quad \forall f \in \{o, g, w\} \quad \text{in } \partial\Omega \quad (2)$$

$$\left. \begin{aligned} P_f(x, t) &= P_f^0(x) \\ S_f(x, t) &= S_f^0(x) \end{aligned} \right\}, \quad t = 0 \quad (3)$$

Where  $\vec{u}_f$  corresponds to multiphase Darcy velocity, which is stated as follows:

$$\vec{u}_f = \frac{\mathbb{K} k_{rf}}{\mu_f} \nabla \Phi_f \quad (4)$$

It is worth noting that, properties like rock porosity, phase volume factors, viscosities, capillary pressures, relative permeabilities, gas-oil ratio, and oil-gas ratio are estimated by correlations or interpolations on tabular data, which is obtained from experimental results, as is shown:

$$\begin{aligned} B_f &= F(P_f), \quad \mu_f = F(P_f), \quad \forall f \in \{o, g, w\} \\ R_s &= F(P_g), \quad R_v = F(P_o), \\ k_{rg} &= F(S_g), \quad k_{rw} = F(S_w), \quad k_{ro} = F(S_g, S_w) \\ P_{cgo} &= P_g - P_o, \quad P_{cow} = P_o - P_w \\ \phi &\approx \phi^0 (1 + C_r (P_o - P_{ref})) \end{aligned} \quad (5)$$

In addition, we model the source/sink terms of BOM equations by using Peaceman model [12],  
 50 which serves for calculating injection and production well flow.

$$q_{f,sc}^{(v)} = \sum_{m=1}^{M_w^{(v)}} \frac{2\pi k_{rf,m} \rho_{f,m} \sqrt{k_{xx,m} k_{yy,m}} h_{z,m}}{B_{f,m} \mu_{f,m} (\ln(r_{e,m}/r_w) + s_m)} \left( p_{bh}^{(v)} - p_{p,m} - \gamma_{f,bh} (z_{bh}^{(v)} - z_m) \right) \delta(x - x_m^{(v)}) \quad (6)$$

## 2.2. Solution Method

An analytic solution for BOM is infeasible, thus a numerical approach is required. Accordingly,  
 a centered finite volume method is used with an implicit scheme for time discretization. Resulting  
 55 algebraic equations for BOM in a cell  $i$  and a time interval  $[n; n+1]$  are as follows:

$$\underbrace{\frac{|\Omega_i|}{\Delta t} \left[ \phi_i \left( \frac{S_{o,i}}{B_{o,i}} + \frac{R_{v,i} S_{g,i}}{B_{g,i}} \right) \right]_n^{n+1}}_{\text{Oil Accumulation}} + \underbrace{\sum_{c \in S} [T_{o,c}^{n+1} \Delta \Phi_{o,c}^{n+1} + R_{v,c} T_{g,c}^{n+1} \Delta \Phi_{g,c}^{n+1}] - Q_{o,i}^{n+1}}_{\text{Oil Flow}} = 0 \quad (7)$$

$$\underbrace{\frac{|\Omega_i|}{\Delta t} \left[ \phi_i \left( \frac{S_{g,i}}{B_{g,i}} + \frac{R_{s,i} S_{o,i}}{B_{o,i}} \right) \right]_n^{n+1}}_{\text{Gas Accumulation}} + \underbrace{\sum_{c \in S} [T_{g,c}^{n+1} \Delta \Phi_{g,c}^{n+1} + R_{s,c} T_{o,c}^{n+1} \Delta \Phi_{o,c}^{n+1}] - Q_{g,i}^{n+1}}_{\text{Gas Flow}} = 0 \quad (8)$$

$$\underbrace{\frac{|\Omega_i|}{\Delta t} \left[ \phi_i \left( \frac{S_{w,i}}{B_{w,i}} \right) \right]_n^{n+1}}_{\text{Water Accumulation}} + \underbrace{\sum_{c \in S} [T_{w,c}^{n+1} \Delta \Phi_{w,c}^{n+1}] - Q_{w,i}^{n+1}}_{\text{Water Flow}} = 0 \quad (9)$$

where:

$$\begin{aligned} \left[ \phi_i \left( \frac{S_{o,i}}{B_{o,i}} + \frac{R_{v,i} S_{g,i}}{B_{g,i}} \right) \right]_n^{n+1} &= \phi_i^{n+1} \left( \frac{S_{o,i}^{n+1}}{B_{o,i}^{n+1}} + \frac{R_{v,i}^{n+1} S_{g,i}^{n+1}}{B_{g,i}^{n+1}} \right) - \phi_i^n \left( \frac{S_{o,i}^n}{B_{o,i}^n} + \frac{R_{v,i}^n S_{g,i}^n}{B_{g,i}^n} \right), \\ \left[ \phi_i \left( \frac{S_{g,i}}{B_{g,i}} + \frac{R_{s,i} S_{o,i}}{B_{o,i}} \right) \right]_n^{n+1} &= \phi_i^{n+1} \left( \frac{S_{g,i}^{n+1}}{B_{g,i}^{n+1}} + \frac{R_{s,i}^{n+1} S_{o,i}^{n+1}}{B_{o,i}^{n+1}} \right) - \phi_i^n \left( \frac{S_{g,i}^n}{B_{g,i}^n} + \frac{R_{s,i}^n S_{o,i}^n}{B_{o,i}^n} \right), \\ \left[ \phi_i \left( \frac{S_{w,i}}{B_{w,i}} \right) \right]_n^{n+1} &= \phi_i^{n+1} \left( \frac{S_{w,i}^{n+1}}{B_{w,i}^{n+1}} \right) - \phi_i^n \left( \frac{S_{w,i}^n}{B_{w,i}^n} \right) \end{aligned}$$

$T_{f,c}$  stands for transmissivity in a face  $c$ , connecting a cell  $i$ , with another cell  $j$ .

$$T_{f,c} = \left( \frac{2}{(\Delta l_i / A_c K_{l,i}) + (\Delta l_j / A_c K_{l,j})} \right) \frac{k_{rf,c}}{\mu_{f,c} B_{f,c}} \quad (10)$$

This system of algebraic equations is solved using the Newton-Raphson method [13]

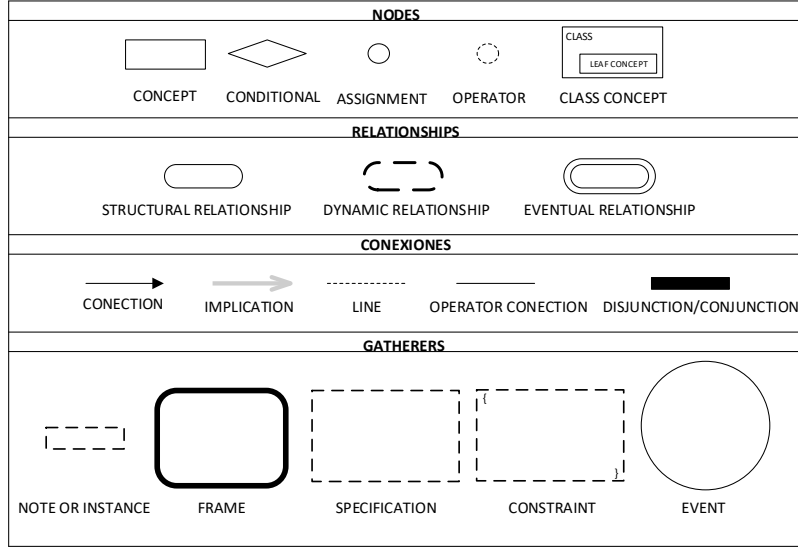


Figure 1: PS Elements by category [15].

### 2.3. Preconceptual Schemas Notation

Preconceptual Schemas are intermediate representations between natural language and conceptual schemas or formal language. They allow for establishing a common ground between a stakeholder and a software engineer [14]. Zapata [15] proposes a notation for representing stakeholder domains, which consists of: nodes, relationships, gatherings and links. We show in Figure 1 the elements belonging to this notation.

In addition, Calle, Chaverra and Noreña [2, 3, 16] extend the notation showed above, with elements which allow for representing domains in scientific software contexts. These elements account for usage of mathematical functions, and they allow for extending PS notation, by using user defined functions. In Figure 2 we present the extended notation for PS in scientific software contexts.

## 3. Event based preconceptual schema

For our PS representation, we first collect common concepts and synonyms across several references such as [8, 9, 11, 18, 19, 20, 21, 22, 23, 24, 25], then search the ownership and hierarchy relationships among those concepts. These led to structural relationships in PS representation.

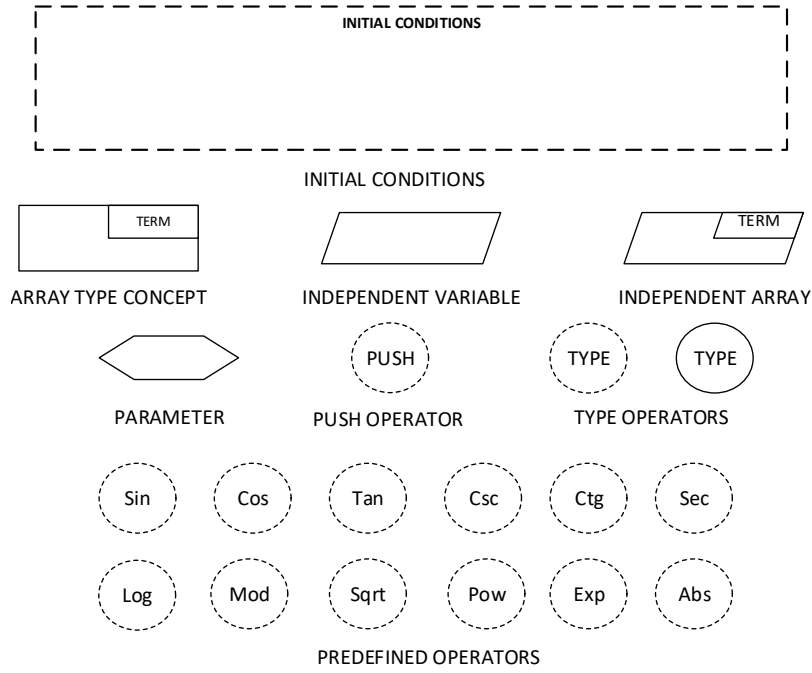


Figure 2: PS Extension for scientific software contexts [17]

After establishing those, we define the possible interactions between actors and concepts involved in our simulation, which are the dynamical relationships in the PS, these represent the actions in which an engineer provides the initial status of a reservoir. Once provided the initial status, some events represent the spontaneous process in which the oil reservoir changes its status, those are triggered by the pass of time, which is an event itself.

Our PS representation consists of seven main concepts: Mesh, Phase, Equilibrium Relationship, Interphase Interaction, Well, Rock and Equation. Moreover, three events describe the process for solving an implicit Black Oil simulation: Mesh appears, Time passes, and Phase pressure varies.

### 3.1. Mesh

The reservoir, which is our spatial domain, is discretized as an orthogonal mesh. This mesh is a collection of cells, which are, likewise, a collection of faces forming a closed surface. In addition, when discretizing the spatial domain, properties like volume and area arise. The volumes are saved for each cell, and the areas are saved for each face.

Moreover each cell has a numeration, which indicates its position in space, and it is used for locating the corresponding neighborhood. This is a reference to another cell, and it is saved inside the connecting face.

90 For generating the simulation mesh, a geomodeller provides the quantity of cells in each direction (x,y,z), dimensions of each cell, and a top, which is the depth of the superior face of each cell. With this information, the mesh appears in an iterative process of creating cells and faces holding the cells connectivity.

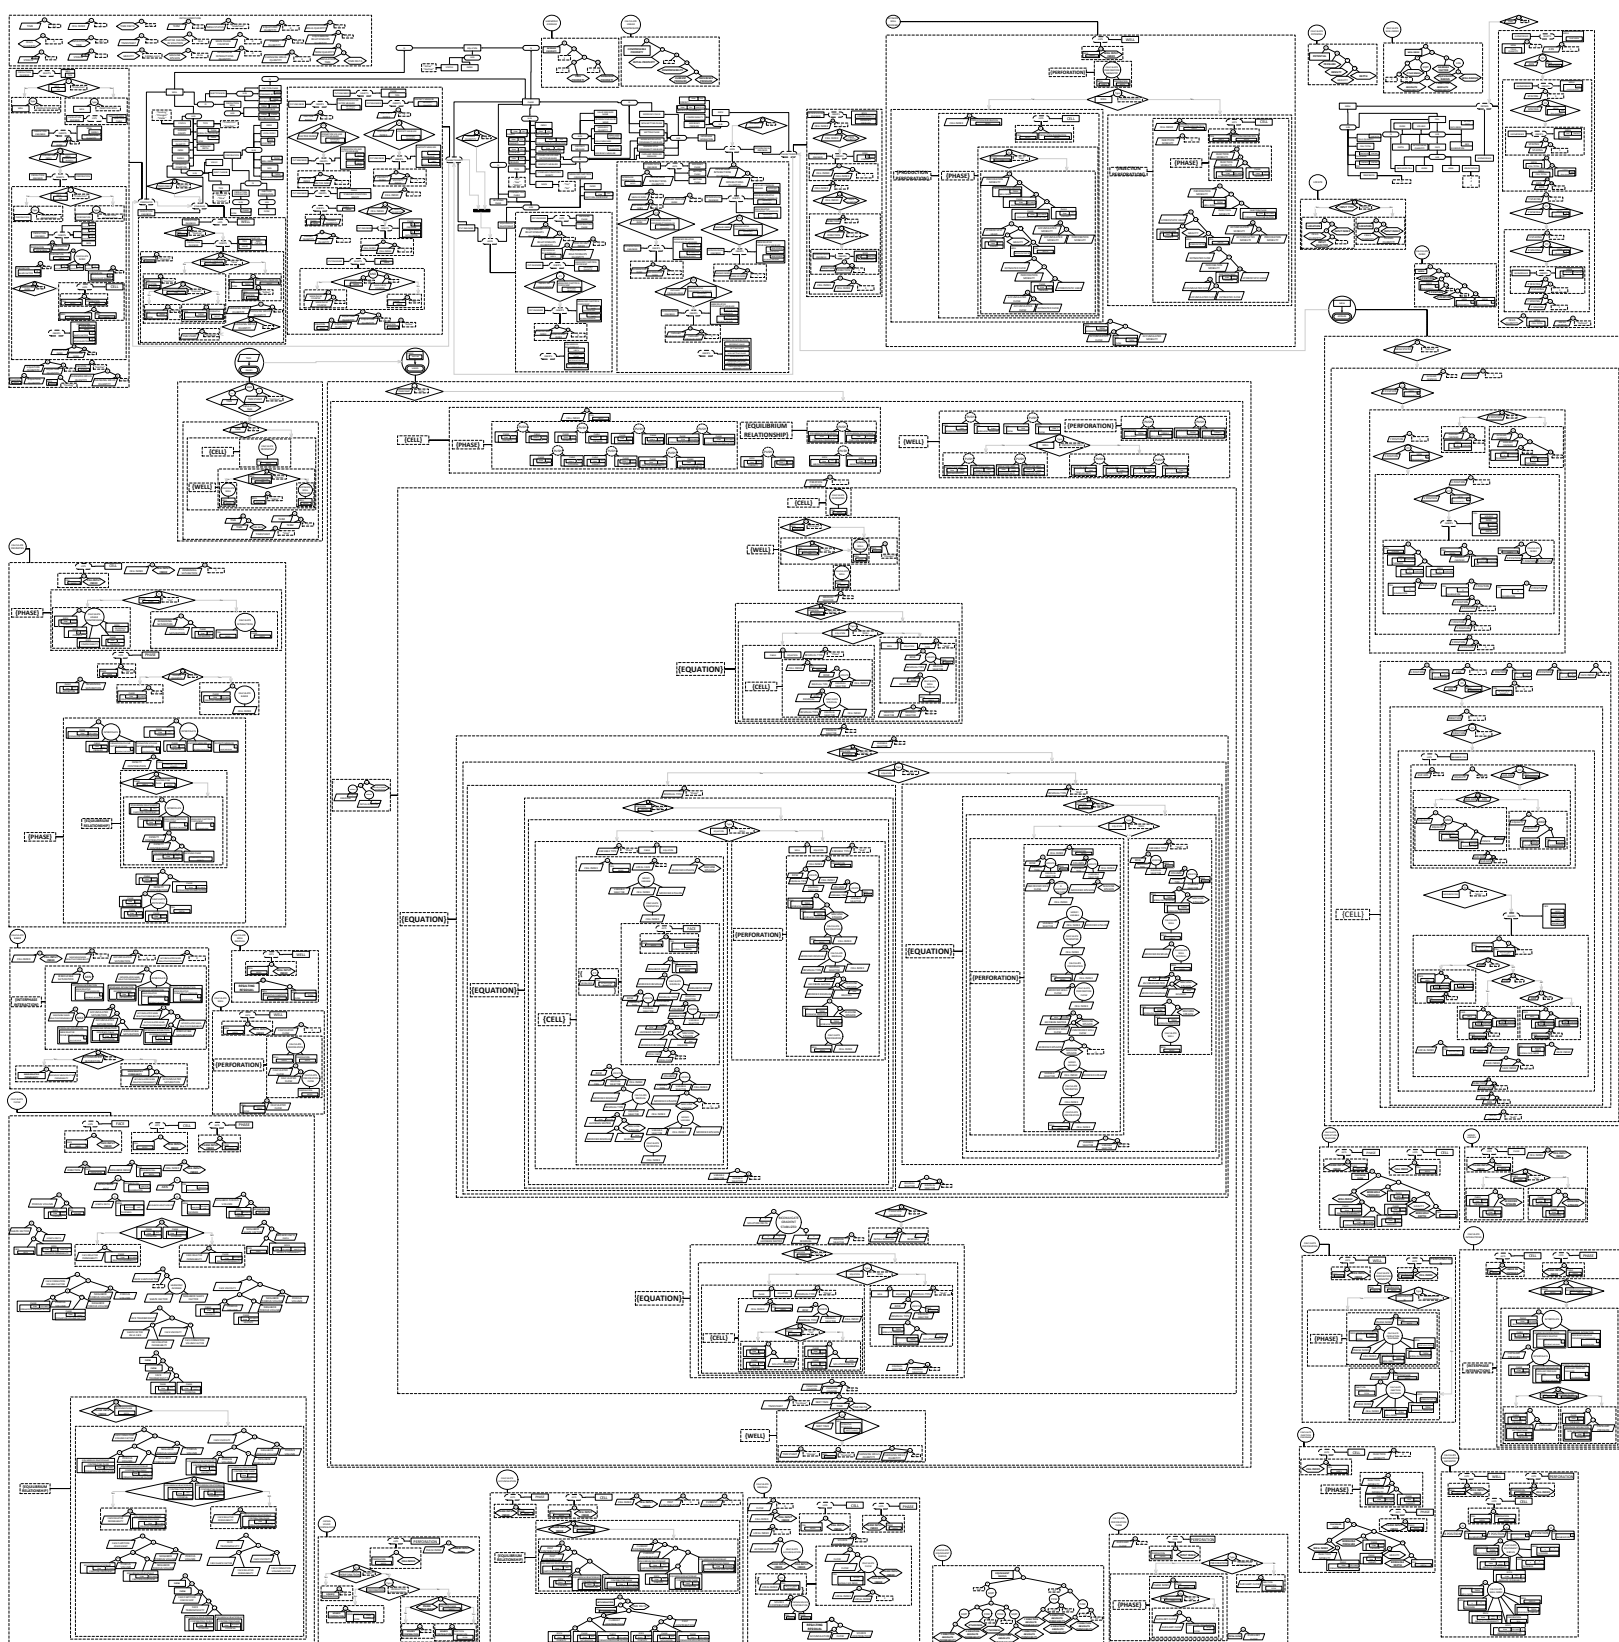


Figure 3: Black Oil PS Representation.



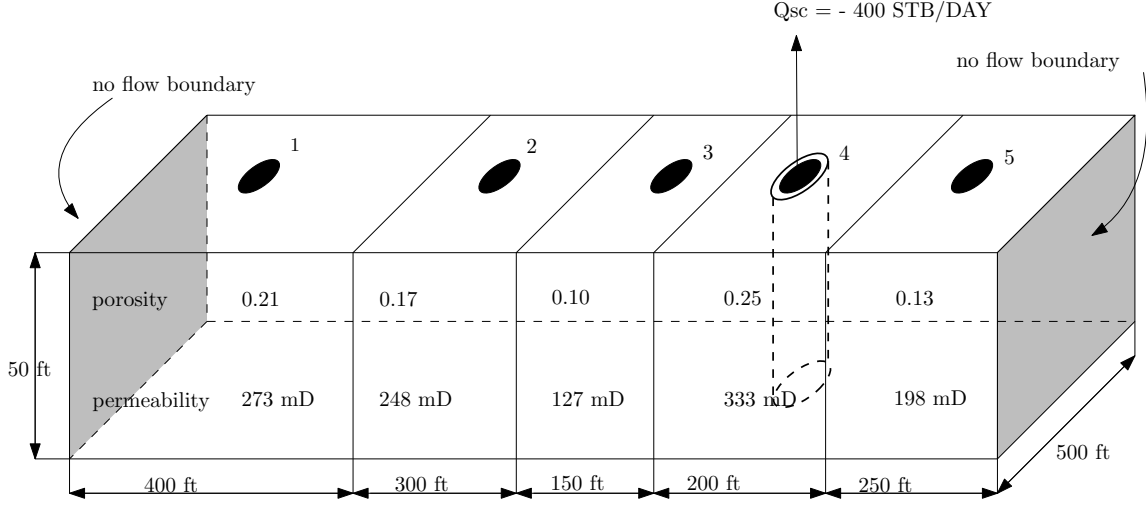


Figure 4: Graphical explanation of study case used from [8].

#### 4. Results

We developed a simulator, which code is a translation of our PS representation; We chose C++17 because of the Standard Template Library (STL) data structures, which allow for achieving a explicit consistency between the code and our PS. Moreover, the concepts are stored in global arrays, and their relations are translated as pointers. This code is available in a GitHub repository.

Here, We present some code snippets like concepts, functions or PS pieces with their representation in PS for verifying consistency.

#### 5. Conclusion

#### Acknowledgments

Authors thank to FONDO NACIONAL DE FINANCIAMIENTO PARA LA CIENCIA, LA TECNOLOGÍA Y LA INOVACIÓN “FRANCISCO JOSÉ DE CALDAS”, to MINCIENCIAS and the Agencia Nacional de Hidrocarburos (ANH) for financial support under Contract No. 273-2017: *Plan Nacional para el Potenciamiento de la Tecnología CEOR con Gas Mejorado Químicamente*. Authors also thank Universidad Nacional de Colombia for logistic and financial support, and the research groups Flow and Transport Dynamics in porous media, and Computational Languages for their contributions on this work.

Pressure loss at constant well flow . Simulation vs Reported data

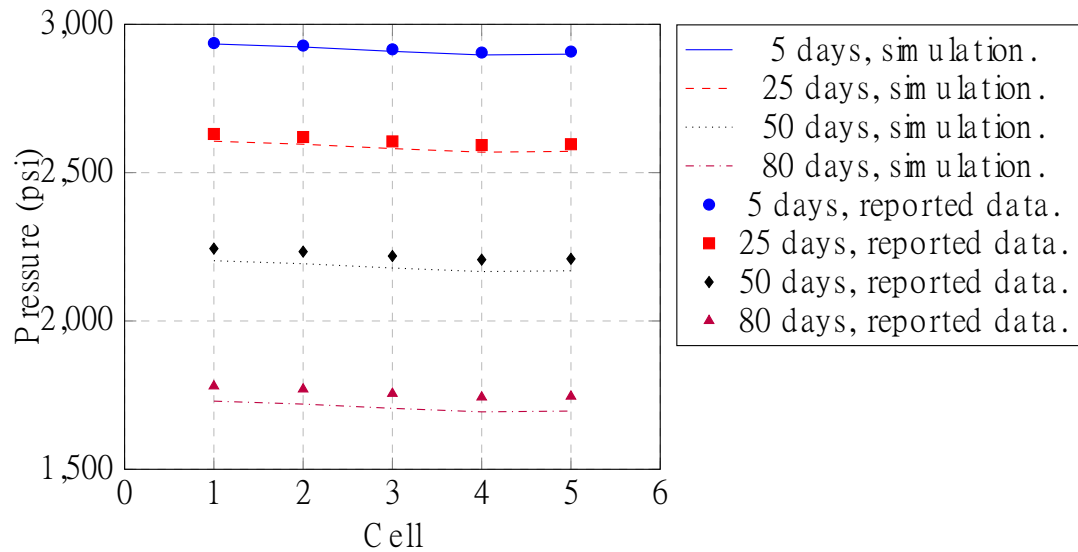


Figure 5: Pressure loss at constant well flow, simulation vs study case [8].

Loss of pressure at constant well pressure. Simulation vs Reported Data

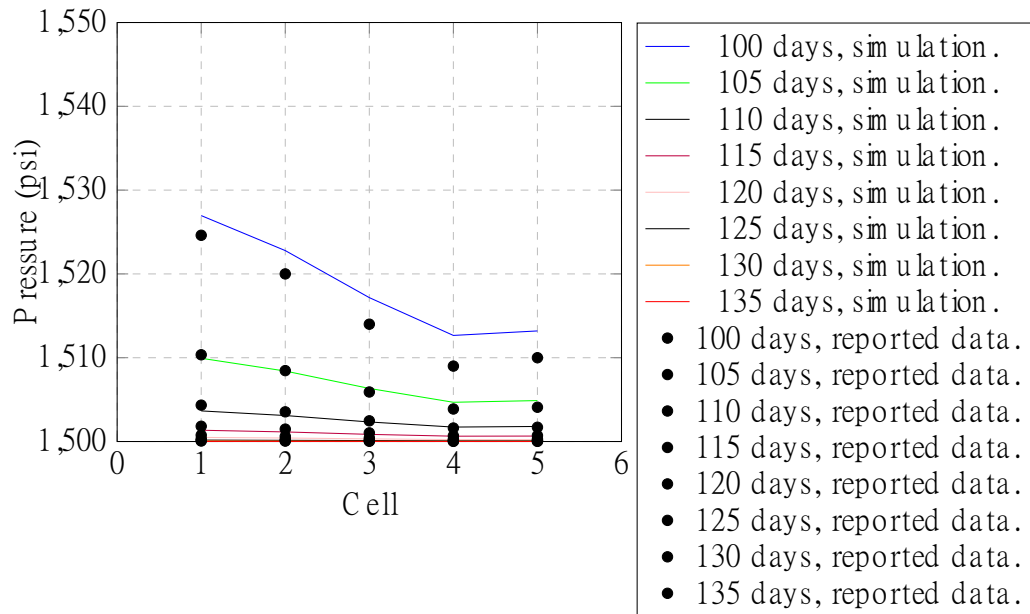


Figure 6: Pressure loss at constant well pressure, simulation vs study case [8].

## 110 References

- [1] S. Velásquez, Un modelo ejecutable para la simulación multi-física de procesos de recobro mejorado en yacimientos de petróleo basado en esquemas preconceptuales, Master's thesis (2019).  
URL <https://repositorio.unal.edu.co/handle/unal/75603>
- 115 [2] J. Calle, Identificación de patrones de diseño para software científico a partir de esquemas preconceptuales, Master's thesis, Universidad Nacional de Colombia, Sede Medellín, línea de Investigación: Ingeniería de software (Noviembre 2016).  
URL <http://bdigital.unal.edu.co/56381/>
- [3] P. Noreña, C. Zapata, A. Villamizar, Representación de eventos a partir de estructuras lingüísticas basadas en roles semánticos: Una extensión al esquema preconceptual, Investi-  
120 gación e innovación en Ingeniería de Software 2 (2018) 69–79.
- [4] P. Noreña, C. Zapata, Business simulation by using events from pre-conceptual schemas, in: Developments in business simulation and experiential learning: proceedings of the annual Absel conference, 2019, pp. 258–263.  
125 URL <https://absel-ojs-ttu.tdl.org/absel/index.php/absel/article/view/3240/3163>
- [5] P. Noreña, C. Zapata, Una representación basada en esquemas preconceptuales de eventos determinísticos y aleatorios tipo señal desde dominios de software científico, Research in Computing Science 147 (2018) 207–220.  
130 URL [http://www.rcs.cic.ipn.mx/rcs/2018\\_147\\_6/Una%20representacion%20basada%20en%20esquemas%20preconceptuales%20de%20eventos%20deterministicos%20y%20aleatorios.pdf](http://www.rcs.cic.ipn.mx/rcs/2018_147_6/Una%20representacion%20basada%20en%20esquemas%20preconceptuales%20de%20eventos%20deterministicos%20y%20aleatorios.pdf)
- [6] C. Durango, P. Noreña, C. Zapata, Representación de eventos de ruido ambiental a partir de esquemas preconceptuales y buenas prácticas de educación geoespacial de requisitos, Research  
135 in Computing Science 147 (2018) 337–341.  
URL [http://www.rcs.cic.ipn.mx/rcs/2018\\_147\\_6/Representacion%20de%20eventos%20de%20ruido%20ambiental%20a%20partir%20de%20esquemas%20preconceptuales%20y%20buenas.pdf](http://www.rcs.cic.ipn.mx/rcs/2018_147_6/Representacion%20de%20eventos%20de%20ruido%20ambiental%20a%20partir%20de%20esquemas%20preconceptuales%20y%20buenas.pdf)

- [7] P. Noreña, C. Zapata, A pre-conceptual-schema-based representation of time events coming from scientific software domain, in: Proceedings of The 22nd World Multi-Conference on Systemics, Cybernetics and Informatics (WMSCI 2018), 2018, pp. 53–58.  
URL <http://www.iiis.org/CDs2018/CD2018Summer/papers/SA390CI.pdf>
- [8] J. Abou-Kassem, S. Farouq-Ali, M. Islam, Petroleum reservoir simulation: a Basic Approach, Gulf Publishing Company, 2006.
- [9] J. Bear, Modeling Phenomena of Flow and Transport in Porous Media, Vol. 31 of Theory and Applications of Transport in Porous Media, Springer International Publishing, Cham, 2018.  
doi:10.1007/978-3-319-72826-1.  
URL <http://link.springer.com/10.1007/978-3-319-72826-1https://doi.org/10.1007/978-3-319-72826-1>
- [10] Z. Chen, Reservoir simulation: mathematical techniques in oil recovery, Vol. 77, Siam, 2007.
- [11] T. Ertekin, J. H. Abou-Kassem, G. R. King, Basic Applied Reservoir Simulation, Society of Petroleum Engineers, 2001.  
URL <https://store.spe.org/Basic-Applied-Reservoir-Simulation--P12.aspx>
- [12] D. W. Peaceman, Interpretation of well-block pressures in numerical reservoir simulation with nonsquare grid blocks and anisotropic permeability, Society of Petroleum Engineers Journal 23 (03) (1983) 531–543.
- [13] K. E. Atkinson, An introduction to numerical analysis, John Wiley & Sons, 2008.
- [14] C. Zapata, Definición de un esquema preconceptual para la obtención automática de esquemas conceptuales de uml, Ph.D. thesis, Universidad Nacional de Colombia, Sede Medellín, Medellín (2007).  
URL <http://bdigital.unal.edu.co/10296/>
- [15] C. Zapata, The UNC-Method revisited: elements of the new approach, Saarbrücken: Lambert Academic Publishing, 2012.
- [16] J. Chaverra, Generación automática de prototipos funcionales a partir de esquemas preconceptuales, Master’s thesis, Universidad Nacional de Colombia, Sede Medellín (2011).  
URL <http://bdigital.unal.edu.co/5498/>

- [17] C. Zapata, P. Noreña, N. González, Representación de eventos disparadores y de resultado en el grafo de interacción de eventos, *Ingenierías USBMed* 4 (2) (2013) 23–32.
- [18] H. Cao, Development of Techniques for General Purpose Research Simulator, Ph.D. thesis, Stanford University. Stanford, CA (2002).  
170
- [19] B. Flemisch, M. Darcis, K. Erbertseder, B. Faigle, A. Lauser, K. Mosthaf, S. Müthing, P. Nuske, A. Tatomir, M. Wolff, R. Helmig, DuMux: DUNE for multi-{phase,component,scale,physics,...} flow and transport in porous media, *Advances in Water Resources* 34 (9) (2011) 1102–1112. doi:10.1016/j.advwatres.2011.03.007.  
175 URL <https://www.sciencedirect.com/science/article/pii/S030917081100056X>
- [20] C. Herrera, Simulation of nitrogen injection as an enhanced recovery method in a tight natural fracture sandstone reservoir with compositional fluids, Master’s thesis, Universidad Nacional de Colombia - Sede Medellín (Julio 2016).  
URL <http://bdigital.unal.edu.co/53175/>
- [21] C. Isaza, Modelo fenomenológico y simulación de la disolución de los asfaltenos depositados en formación usando un solvente químico, Master’s thesis, Universidad Nacional de Colombia - Sede Medellín, magister en Ingeniería de Petróleos (2017).  
180 URL <http://bdigital.unal.edu.co/59420/>
- [22] R. S. Mohammad, X. Zhao, S. Zhang, S. J.-u.-D. Shah, Bubble point simulation of reservoir oil and carbon dioxide mixtures, *Arabian Journal for Science and Engineering* 42 (4) (2017) 1633–1641. doi:10.1007/s13369-016-2347-4.  
185 URL <https://doi.org/10.1007/s13369-016-2347-4>
- [23] I. Mozo, Desarrollo de un modelo matemático de la estimulación de pozos productores de crudo pesado con nanofluidos reductores de viscosidad, Master’s thesis, Universidad Nacional de Colombia - Sede Medellín (Septiembre 2017).  
190 URL <http://bdigital.unal.edu.co/59324/>
- [24] C. Qiao, S. Khorsandi, R. T. Johns, A General Purpose Reservoir Simulation Framework for Multiphase Multicomponent Reactive Fluids, in: SPE Reservoir Simulation Conference, Society of Petroleum Engineers, 2017.

- <sup>195</sup> [25] H. Cao, Development of techniques for general purpose research simulator, Ph.D. thesis, Ph.D. Thesis, Stanford University (2002).