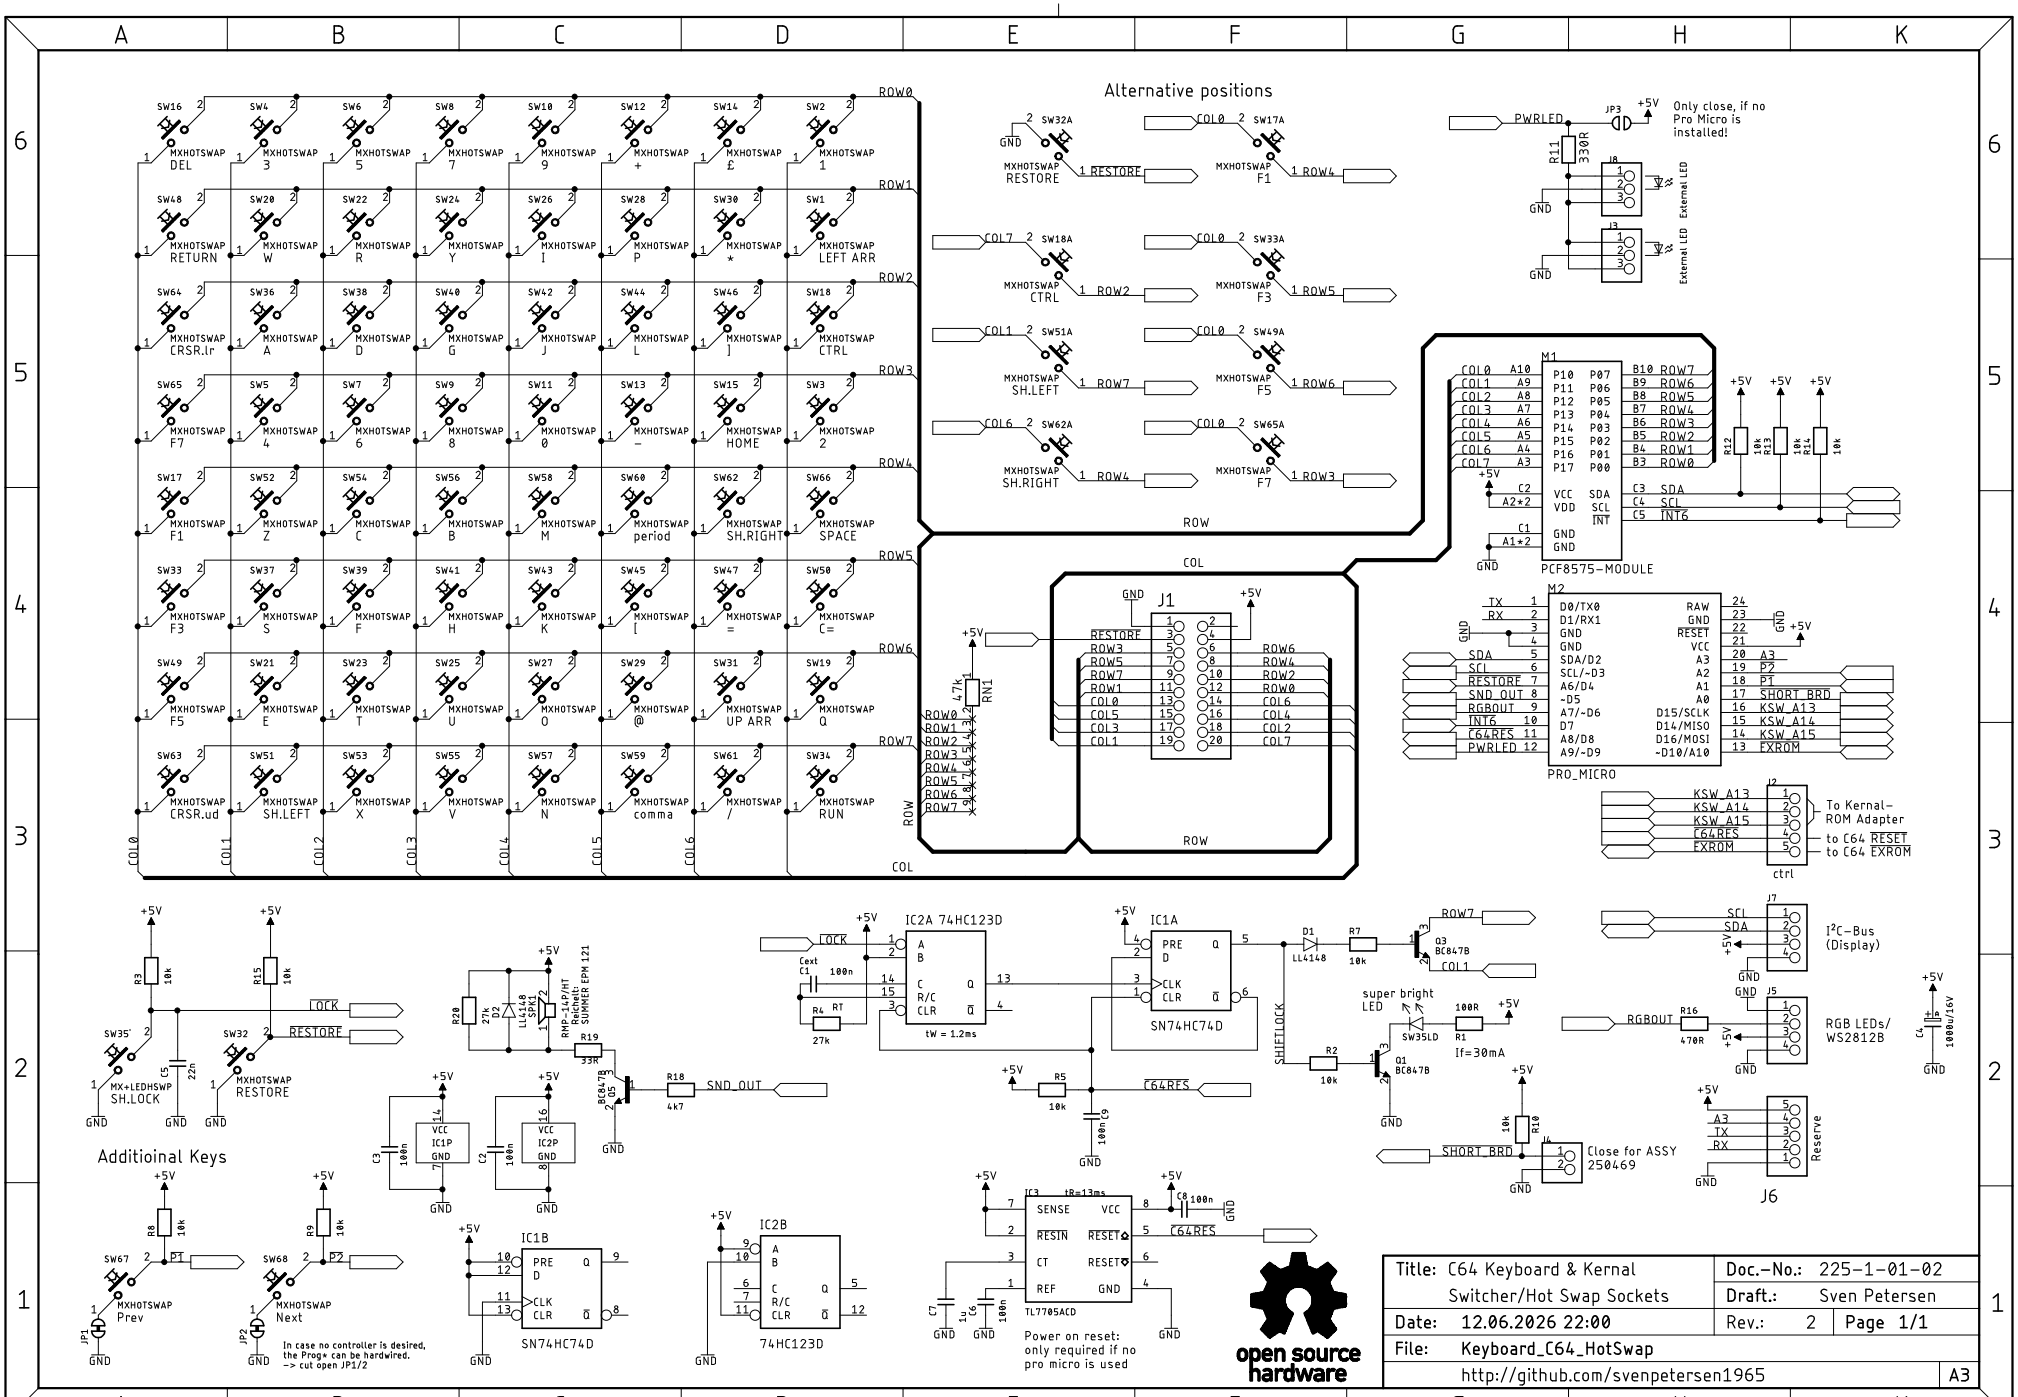
Alternative positions
Only close, if no Pro Micro is installed!
PCF8575-MODULE
PRO_MICRO
To Kernal-ROM Adapter
to C64 RESET
to C64 EXROM
I²C-Bus (Display)
RGB LEDs/ WS2812B
Reserve
Close for ASSY 250469
Additioinal Keys
In case no controller is desired, the Prog* can be hardwired. -> cut open JP1/2
Power on reset: only required if no pro micro is used
open source hardware
Title: C64 Keyboard & Kernal Switcher/Hot Swap Sockets
Doc.-No.: 225-1-01-02
Draft.: Sven Petersen
Date: 12.06.2026 22:00
Rev.: 2
Page 1/1
File: Keyboard_C64_HotSwap
http://github.com/svenpetersen1965
A3

Sven Petersen 2025	Doc.-No.: 225-2-01-02	
	Cu: 35µ	Cu-Layers: 2
Keyboard_C64_HotSwap		
nicht gespeichert!	Rev.: 2	
placement component side		

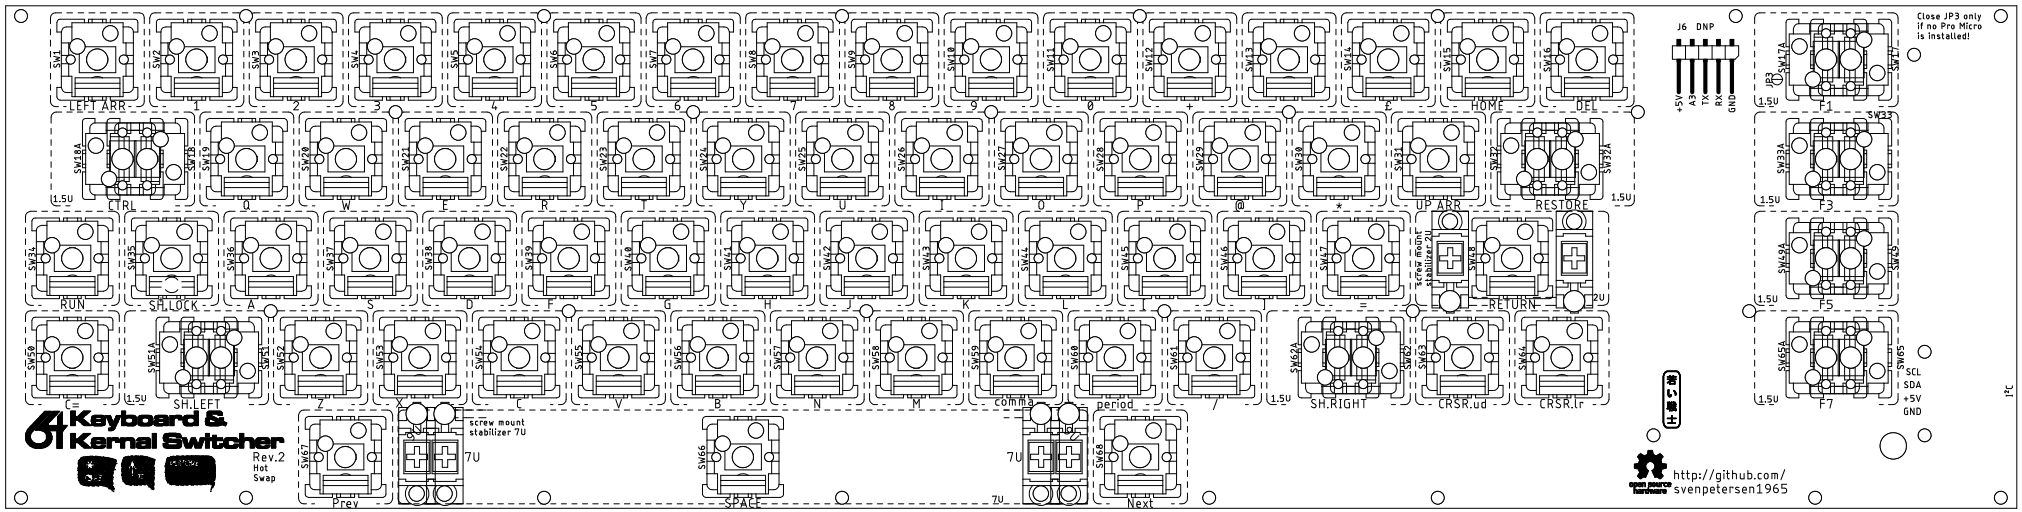

Sven Petersen 2025	Doc.-No.: 225-2-01-02	
	Cu: 35µ	Cu-Layers: 2
Keyboard_C64_HotSwap		
nicht gespeichert!	Rev.: 2	
placement solder side		

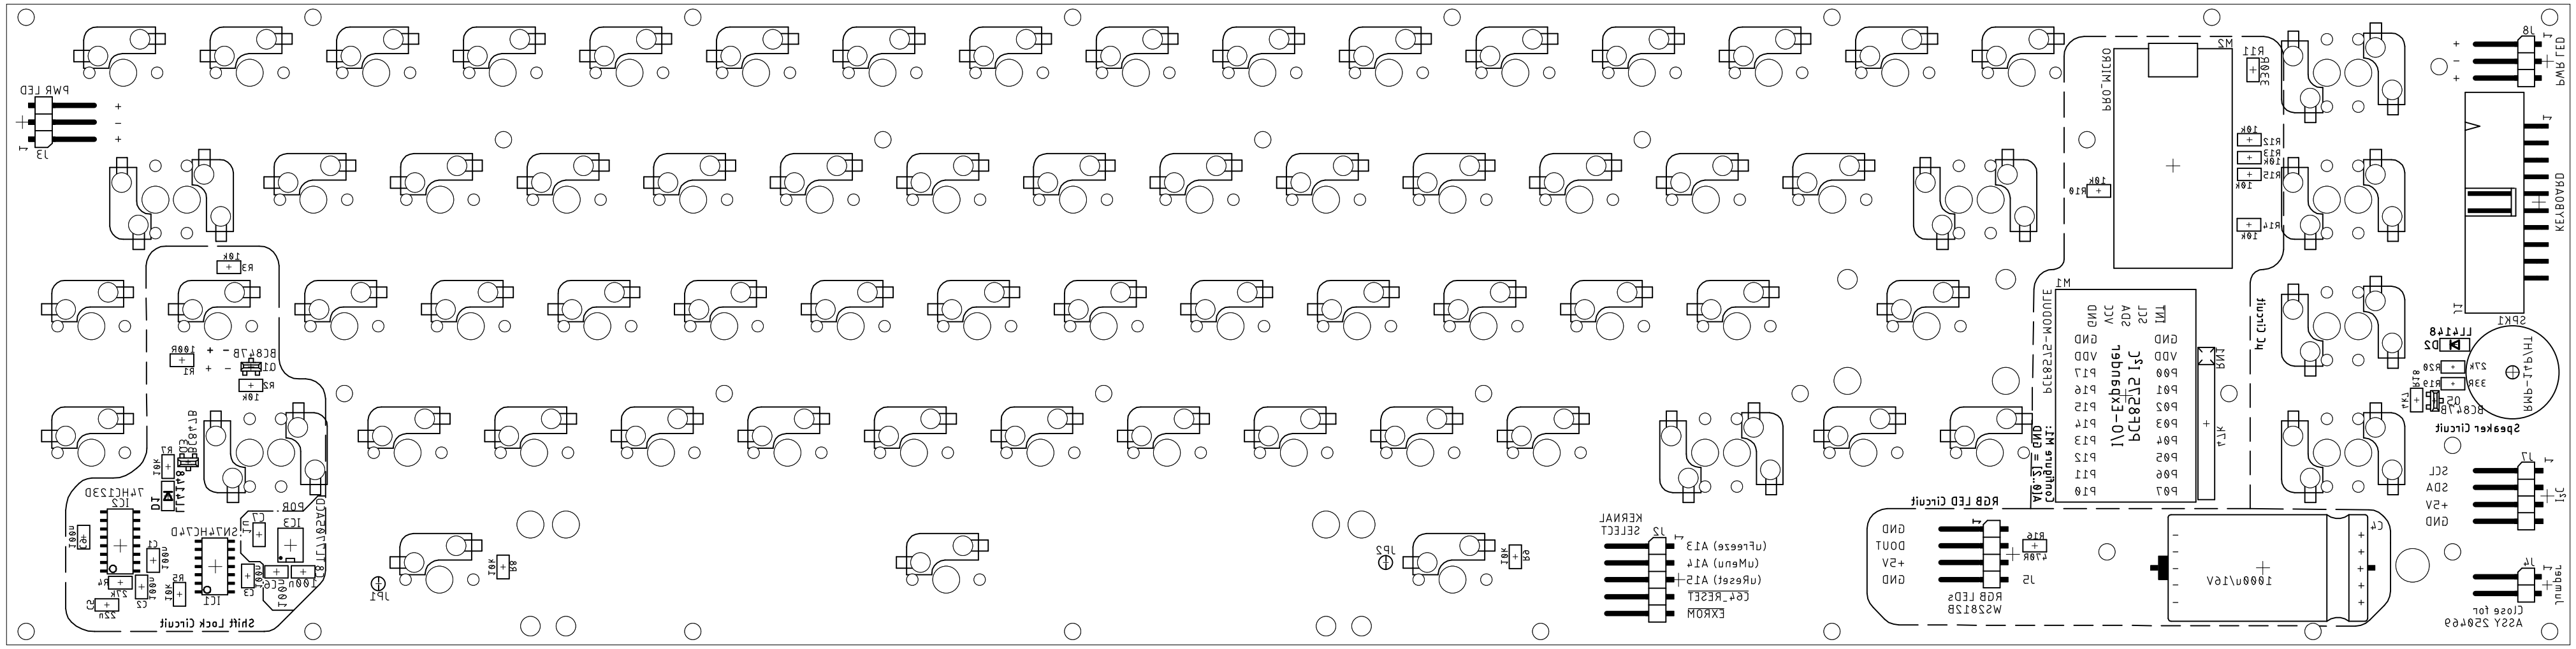

Sven Petersen 2025	Doc.-No.: 225-2-01-02	
	Cu: 35µ	Cu-Layers: 2
Keyboard_16k_HotSwap		
nicht gespeichert!		Rev.: 2
placement solder side		

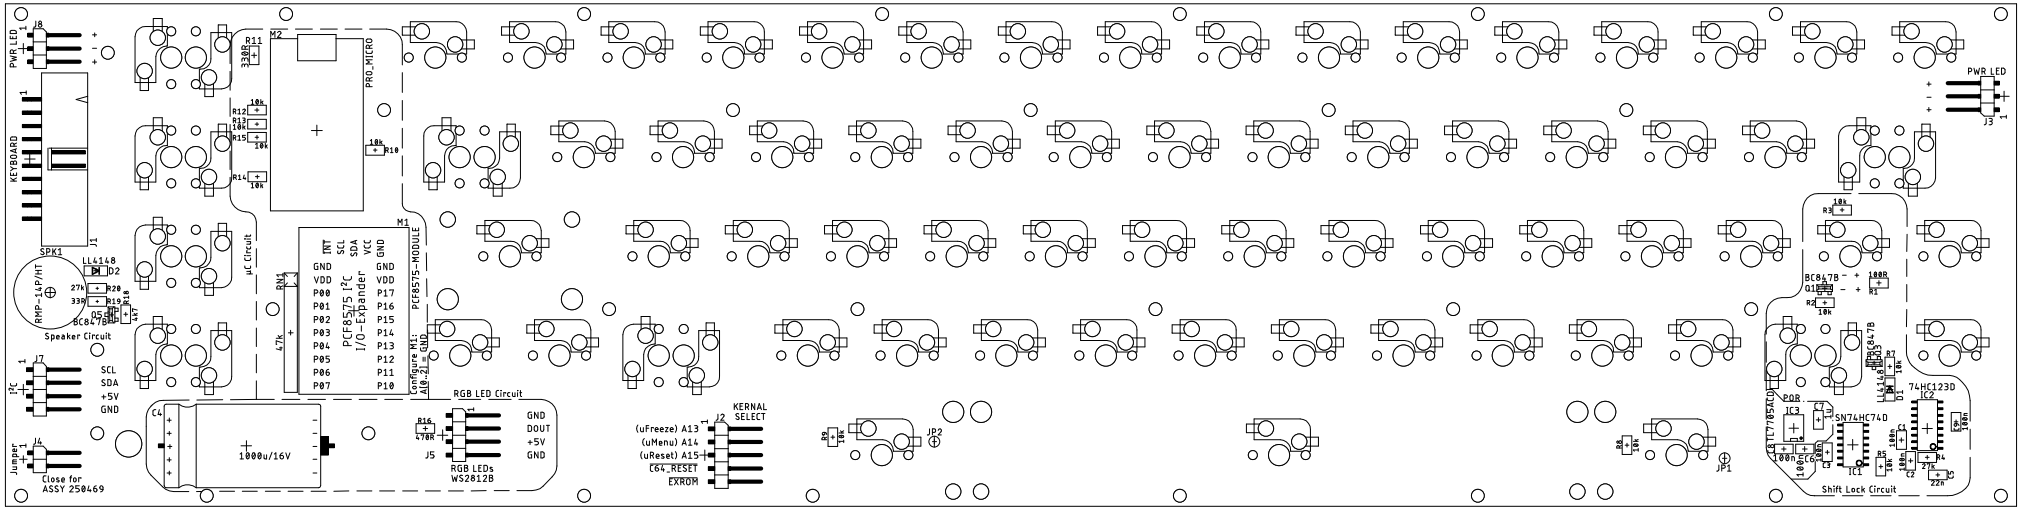

Sven Petersen 2025	Doc.-No.: 225-2-01-02	
	Cu: 35µ	Cu-Layers: 2
Keyboard_C64_HotSwap		
nicht gespeichert!		Rev.: 2
top		

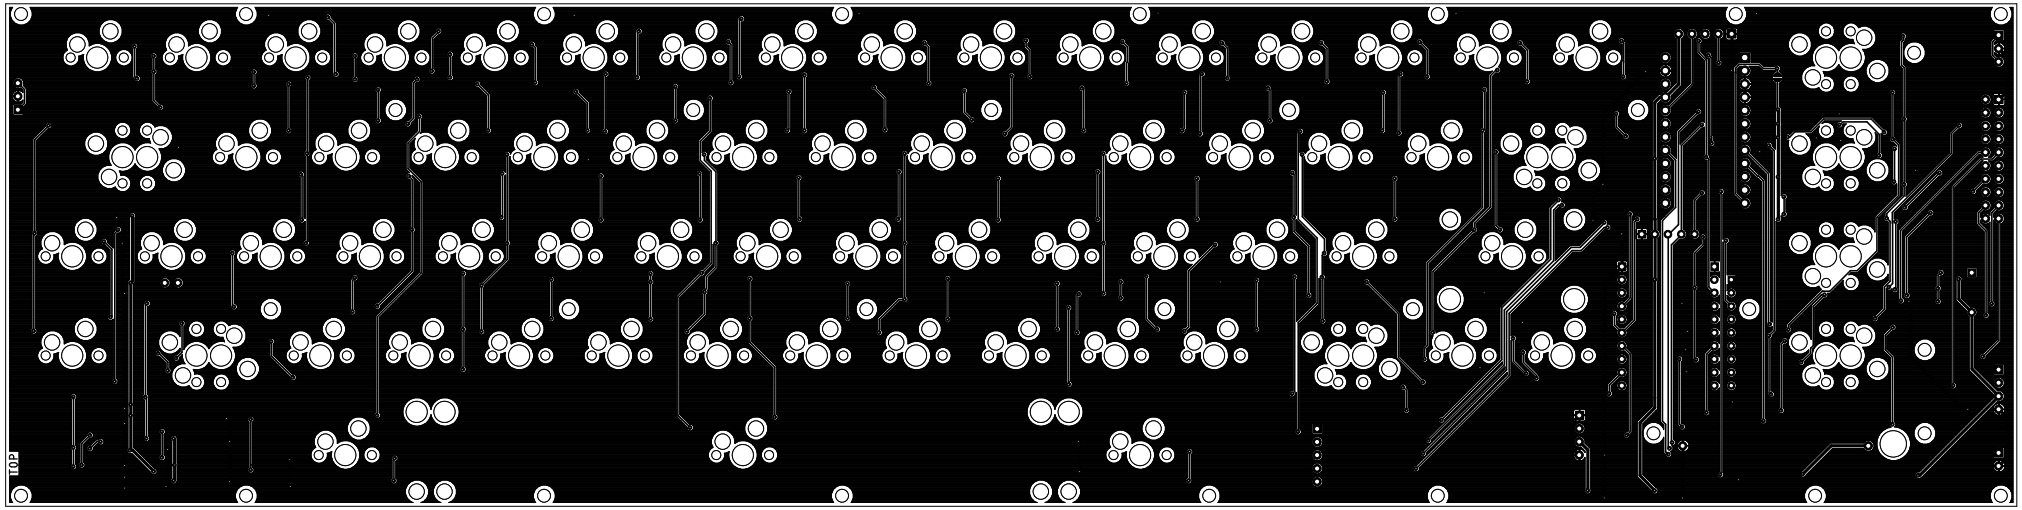

Sven Petersen 2025	Doc.-No.: 225-2-01-02	
	Cu: 35µ	Cu-Layers: 2
Keyboard_C64_HotSwap		
nicht gespeichert!		Rev.: 2
bottom		

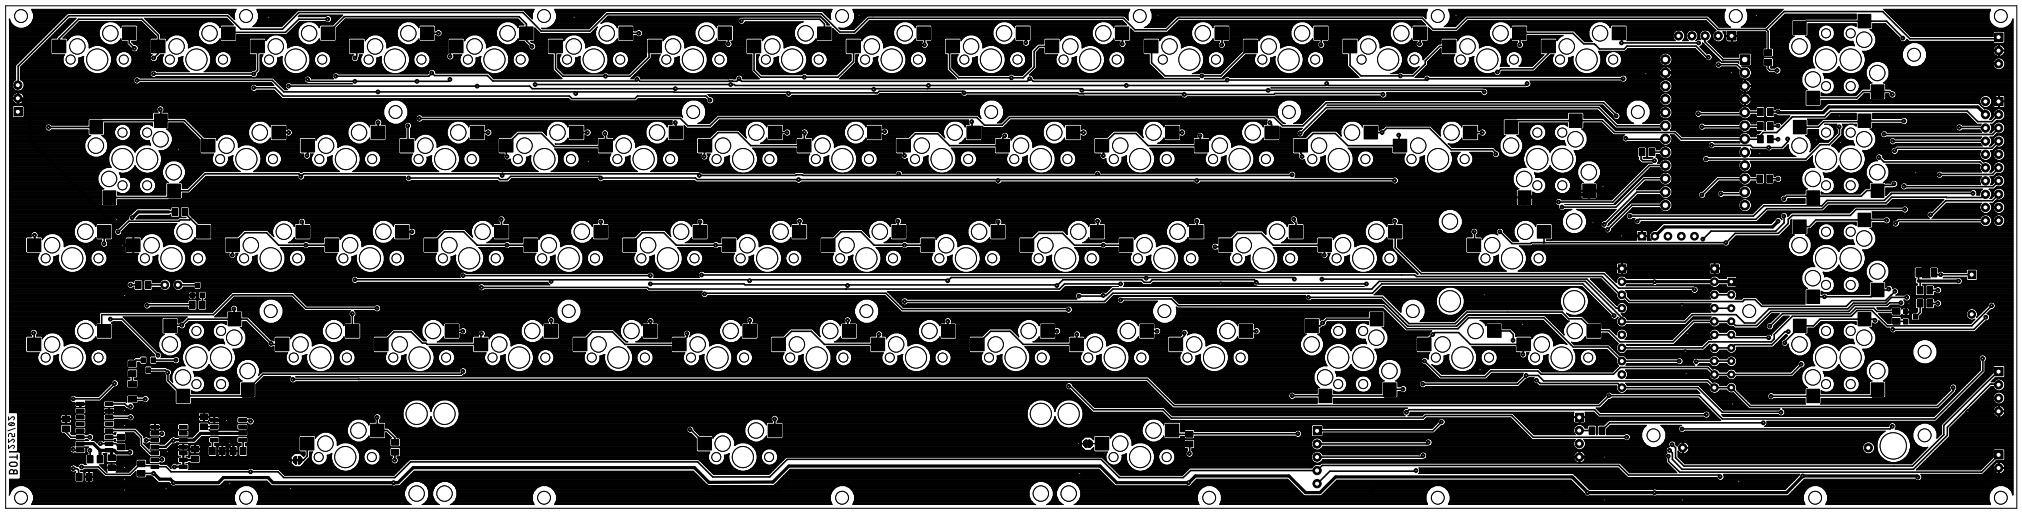

Sven Petersen 2025	Doc.-No.: 225-2-01-02	
	Cu: 35µ	Cu-Layers: 2
Keyboard_C64_HotSwap		
nicht gespeichert!		Rev.: 2
stopmask component side		

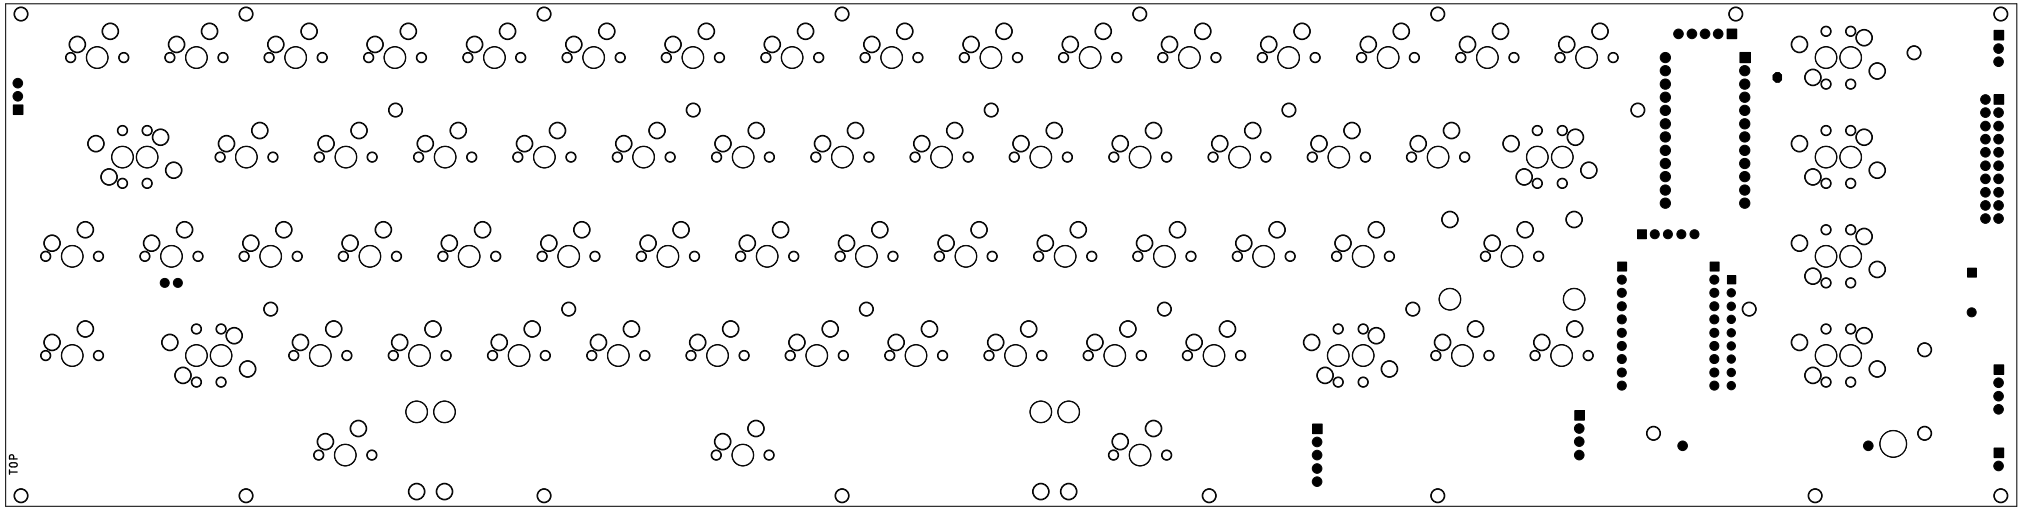

Sven Petersen 2025	Doc.-No.: 225-2-01-02	
	Cu: 35µ	Cu-Layers: 2
Keyboard_C64_HotSwap		
nicht gespeichert!		Rev.: 2
stopmask solder side		

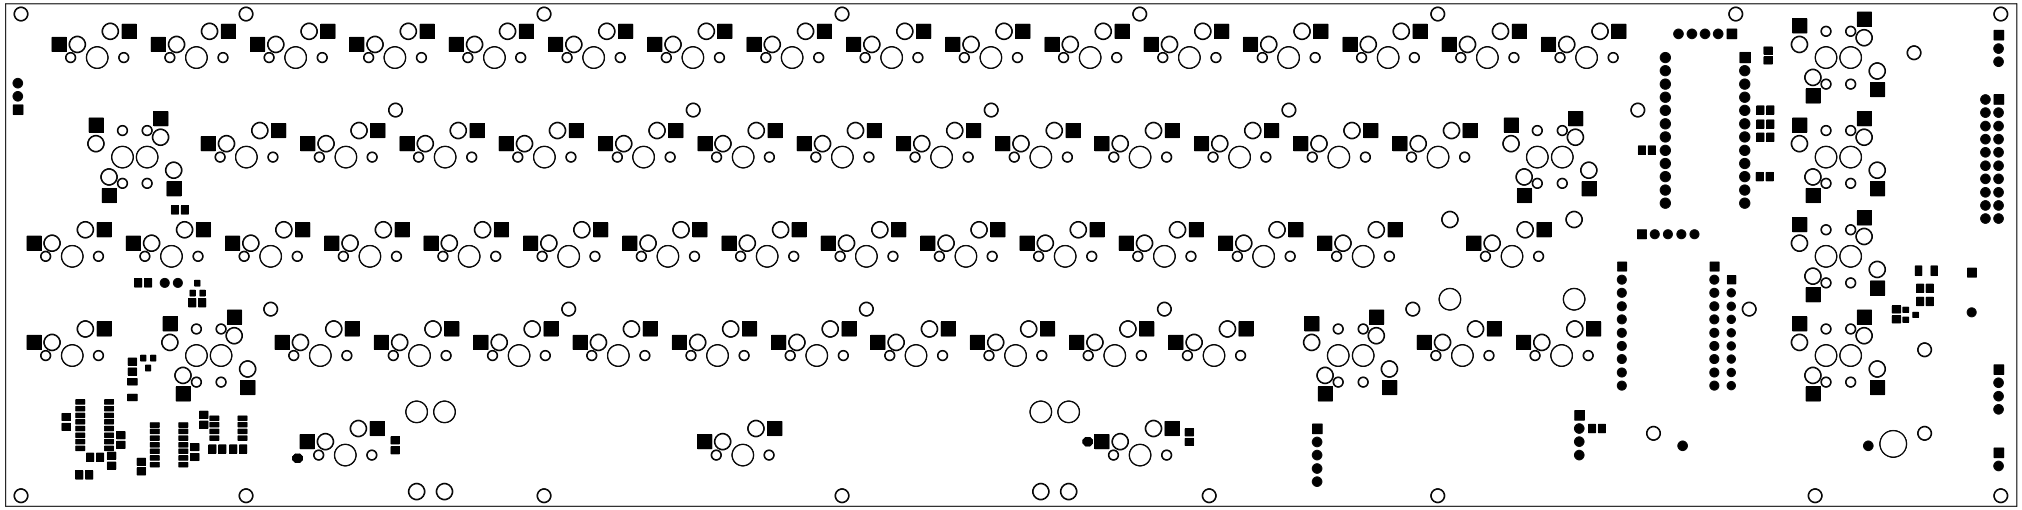
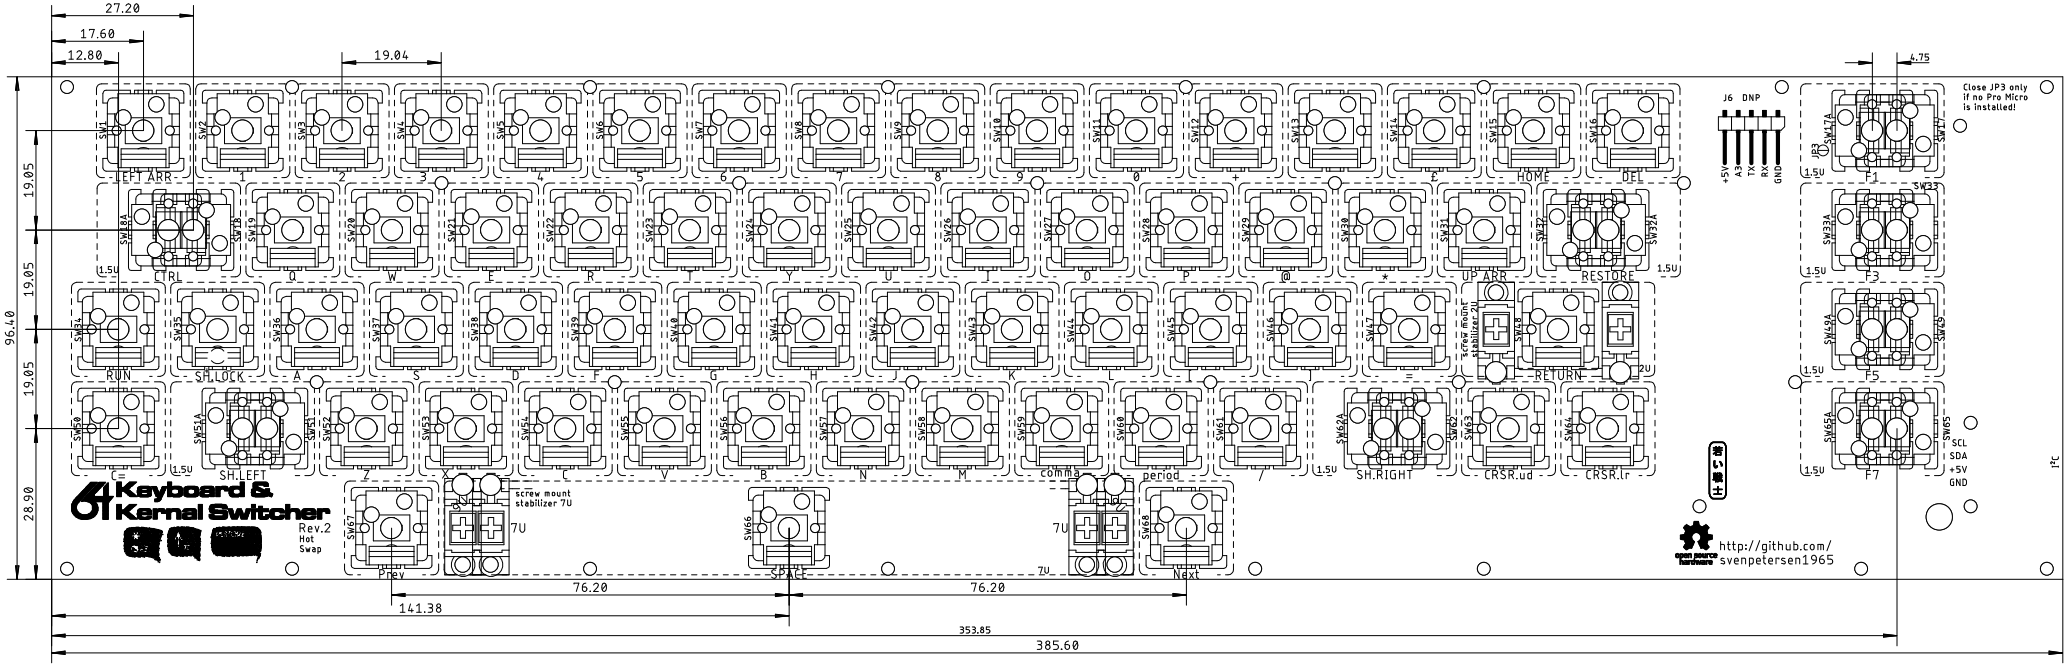
Sven Petersen 2025	Doc.-No.: 225-2-01-02	
	Cu: 35µ	Cu-Layers: 2
Keyboard_C64_HotSwap		
nicht gespeichert!		Rev.: 2
placement component side	measures