

NEW

EX210LC



PRIME

WITH ELECTRIC CONVERSION KIT





HUMAN MACHINE INTERFACE (HMI)

User-Friendly Display: Intuitive and clear interface for seamless operation Real-Time Monitoring: Displays key operational parameters, including:

- Motor Current (A)
- Main Voltage (V)
- Active Power (kW)
- Active Energy (kWh)
- Motor Voltage (%)
- Main Frequency (Hz)



STANDARD FEATURES:

- 90 kW TEFC Motor
- Electronic Smooth Start Function
- Electrical Safety Protection
- Power Consumption Meter
- Motor Start from Cabin & Control Cabinet
- Digital Display



OPTIONAL FEATURES:

- Power Cable (Machine to Field Switch)
- "J" Attachment for Cable Handling
- Travel Alarm
- Rear Camera
- Cable Reel
- Tower for Cable Reel
- Tower collector on Machine
- Safety Railing



RETURN ON INVESTMENT

Low operating cost

- Higher machine availability
- Freedom from:
 - Air filter cleaning (No air filter)
 - Fuel filters changing (No fuel filter)
 - Engine oil & filter replacement (Electrical motor fitted)
 - Total engine maintenance
 - Overall emission free
- HP return line filter for longer life of hydraulic aggregates
- Extended service intervals for reduced maintenance cost:
 - Long drain hydraulic oil change: 4500 hrs
 - Travel device oil change: 2000 hrs

Low Consumption

- Emission free electric drive
- Maintenance free electric motor
- iOHS Japanese hydraulics
- Improved efficiency

High Resale Value

- Most trusted brand
- Largest dealer network
- Highly reliable & durable machines
- Easy availability of parts & support



COMPREHENSIVE PROTECTION FEATURES

- Emergency Stop
- Electronic Overload Protection (EOL)
- Dual Overload Protection (separate overload for start and run)
- Locked Rotor Protection
- Current Underload Protection
- Current Imbalance Protection
- Power Factor Underload Protection
- Under & Over Voltage Protection
- Voltage Imbalance Protection
- Earth Fault / Ground Fault Protection
- Phase Reversal Protection
- Bypass Open Protection
- Max. Number of Starts/Hour: 7



Higher savings
over 5000hrs

₹ 42,00,000*






SPECIFICATIONS

Operating Weight : 21,000 –21,200 kg
 Bucket Capacity : 0.9 –1.7 m³
 Main Motor Power : 90 kW
 Input Power : 415 V (3 Phase)
 Recommended
 Operating Radius : 50 m (With tower cable reel)
 100 m (With standard tethering)



RELIABLE MOTOR

- Type: TEFC (Totally Enclosed Fan Cooled) Motor
- Power Output: 90 kW @ 1480 rpm
- Voltage Rating: 415 V ($\pm 10\%$ tolerance)
- Protection Class: IP55
- Insulation Class: F
- Temperature Resilience: Designed for reliable operation across a wide temperature range
- Efficiency: High-efficiency motor for optimal performance
- Standards Compliance: Conforms to IS:1231, IS:12075, IS:12065, IS:325

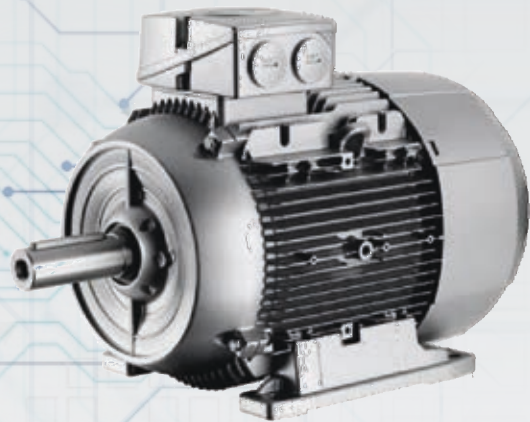

ELECTRONIC CONTROL

- Certifications: CE, cULus, CCC, EAC, ANCE, C-Tick, KC
- Communication Protocols: Modbus RTU, Profibus, Profinet, EtherCAT, BACnet, Ethernet, DeviceNet, Anybus
- Approvals: ABS, DNV, Lloyd's Register, CCS, PRS, Class NK



KEY FEATURES

- 3-Phase 415 V Input - Ensures compatibility and easy availability at worksites
- High Efficiency & Reliability:
 - Induction Motor - Provides robust and consistent power output
 - Electronic Smooth Start - Minimizes wear and enhances system longevity
 - Fan-Driven Hydraulic Cooler - Optimizes temperature control for prolonged durability
- Comprehensive Safety Protection

