

NEW

EX130
PRIME

TUNNEL EXCAVATOR



SPECIFICATIONS

ENGINE

ModelTATA 697 NA
 TypeWater cooled, 6 cylinder in-line diesel engine
 Engine power76 PS @ 2200 rpm
 Max.torque25.4 Kgf-m @ 2000 rpm
 Batteries2 x 12V

HYDRAULIC SYSTEM

Main pumps2 variable displacements axial piston pumps
 Flow rate2 x 115 lpm
 Pilot pump1 gear pump
 Flow rate23 lpm

SUPERSTRUCTURE

Swing Speed13.8 rpm

RELIEF VALVE SETTINGS

Implement circuit285 kgf/cm²
 Swing circuit285 kgf/cm²
 Travel circuit355 kgf/cm²
 Pilot circuit40 kgf/cm²


TRAVEL MECHANISM

Travel Speed0 - 4.3 kmph
 Max. traction force7500 kgf
 Gradeability35° (70% continuous)

UNDERCARRIAGE

No. of upper rollers1
 No. of lowers rollers6
 No. of track shoes41
 Shoe width500 mm

DIMENSIONS

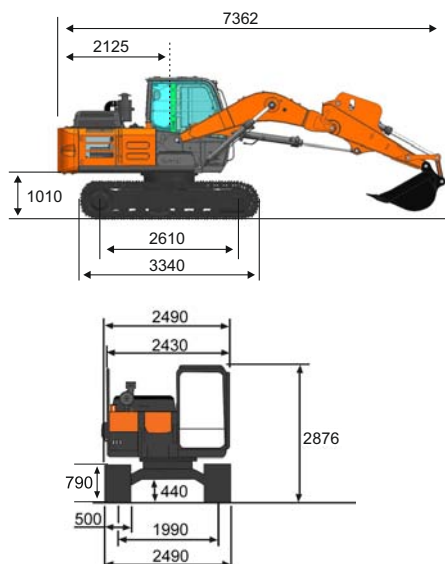

All dimensions are in mm


SERVICE REFILL CAPACITIES

Hydraulic tank72.0 ltr
 Hydraulic system126.0 ltr
 Fuel tank250.0 ltr
 Engine coolant24.0 ltr
 Engine oil17.0 ltr
 Swing device3.2 ltr
 Travel device (Each side)3.5 ltr

WEIGHT AND GROUND PRESSURE

Machine	Operating weight	Ground pressure
Backhoe	12,418 - 12,814 kg	0.47 kgf/cm ²

BACKHOE ATTACHMENT

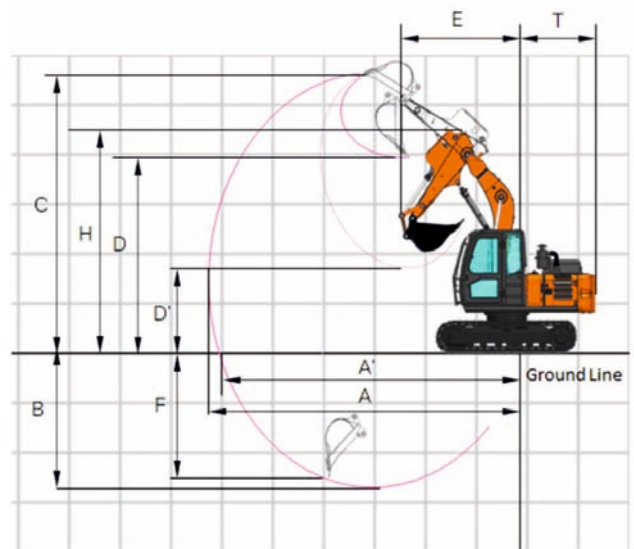

WORKING RANGES*

	Boom length (m)	2950
	Arm Length (m)	1900
A	Maximum Reach	6009
A'	Maximum Reach (Ground Level)	5828
B	Maximum digging depth	2716
C	Maximum cutting height	6610
D	Maximum dump height	4387
D'	Minimum Dump height	2278
E	Minimum swing radius	2588
F	Max vertical wall depth	2071
H	Maximum height at min. swing radius	4914
T	Tail Radius	2125
T+E	Min machine length	4713

*with 0.6m³ QR bucket

All dimensions are in mm

Tata Hitachi Construction Machinery Company Private Limited

Registered Office: Jubilee Building, 45 Museum Road, Bangalore, India 560025
 Telephone: +9180 66953301 / 02 / 03 / 04 / 05 | Email: info@tatahitachi.co.in



OUR RANGE OF PRODUCTS



Authorised Dealer

These specifications are subject to change without prior notice. The machine depicted may vary from the actual machine. Please contact our nearest office for latest specifications. Accessories shown here are not part of the standard equipment. Performance of the machine may vary with site and operating conditions encountered.