

# **CC3200 SimpleLink Wi-Fi and IoT Solution With MCU LaunchPad Getting Started Guide**

## **User's Guide**



Literature Number: SWRU376D

June 2014–Revised March 2016

<b>1</b>	<b>Introduction.....</b>	<b>5</b>
1.1	Prerequisites .....	5
<b>2</b>	<b>Getting Started .....</b>	<b>6</b>
2.1	Download and Install Software .....	6
2.2	Configure Board .....	6
2.3	Update Service Pack .....	7
<b>3</b>	<b>Compile, Download, and Debug .....</b>	<b>8</b>
3.1	Option 1: Code Composer Studio (CCS) .....	8
3.2	Option 2: IAR Workbench .....	17
3.3	Option 3: GCC .....	23
<b>4</b>	<b>Summary .....</b>	<b>29</b>
<b>5</b>	<b>Acronyms Used.....</b>	<b>30</b>
	<b>Revision History .....</b>	<b>31</b>
	<b>Revision History .....</b>	<b>31</b>
	<b>Revision History .....</b>	<b>31</b>

## List of Figures

1	Jumpers on the CC3200-LAUNCHXL.....	6
2	Device Manager.....	7
3	Code Composer Studio v6 Setup.....	8
4	CCS App Center .....	9
5	Select CCS Projects to Import.....	10
6	Select CCS Projects to Import.....	11
7	Properties for ti_rtos_config.....	12
8	Select SimpleLink Project .....	13
9	Editing common.h .....	13
10	Target Configurations.....	14
11	Import Target Configuration.....	14
12	Set as Default.....	15
13	Launch Tera Term .....	15
14	Tera Term Serial Port Setup.....	16
15	Debug wlan_station .....	16
16	Tera Term VT.....	17
17	IAR Embedded Workbench IDE.....	18
18	Open simplelink.eww .....	19
19	Rebuild the simplelink Project. ....	20
20	Editing common.h .....	21
21	Select TI Stellaris Driver.....	21
22	Launch Tera Term .....	22
23	Tera Term Serial Port Setup.....	22
24	Debug Icon .....	23
25	Tera Term VT.....	23
26	Cygwin Setup .....	24
27	Zadig Options .....	25
28	Replace Driver .....	25
29	Editing common.h .....	26
30	Output Screen .....	26
31	Debugging wlan_station .....	27
32	Tera Term VT.....	27
33	Device Manager .....	28



# **CC3200 SimpleLink™ Wi-Fi® and IoT Solution With MCU LaunchPad™ Getting Started Guide**

---

---

---

This guide is intended to assist users in the initial setup and demonstration of the *Getting Started with WLAN Station* application. The guide explains how to install an Integrated Development Environment (IDE), and then compile, download, and debug *Getting Started with WLAN Station*.

## **1 Introduction**

### **1.1 Prerequisites**

The user should have the following items:

- One CC3200-LAUNCHXL
- An 802.11b/g/n (2.4 GHz) Wireless Access Point (AP).
- A computer running the Microsoft® Windows® 7 or XP operating systems.

## 2 Getting Started


### 2.1 Download and Install Software

Download and install the following software:

- [CC3200 SDK package](#).
  - This guide assumes the use of the default installation folder `C:\TI\CC3200SDK_1.2.0\`.
- [Tera Term](#) (or similar software)
  - Tera Term link: <http://en.sourceforge.jp/projects/ttssh2/releases/>


### 2.2 Configure Board

The jumpers on the CC3200-LAUNCHXL should be connected as shown in [Figure 1](#). It may be necessary to move a jumper from P58-VCC to SOP2.

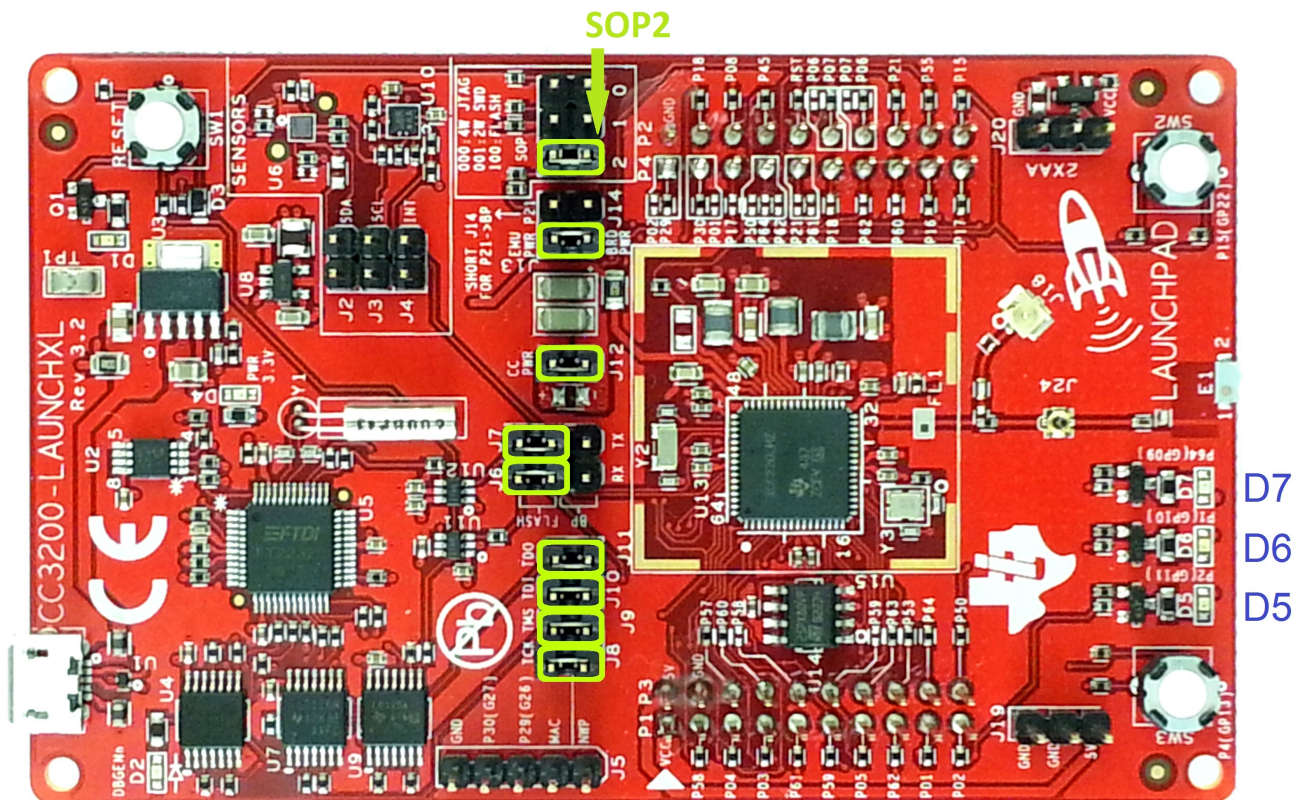

**Figure 1. Jumpers on the CC3200-LAUNCHXL**

1. Connect the CC3200-LAUNCHXL to the PC using the provided micro-USB cable.
2. The CC3200-LAUNCHXL is now visible in the Device Manager as shown in [Figure 2](#). Note the COM port number that appears.

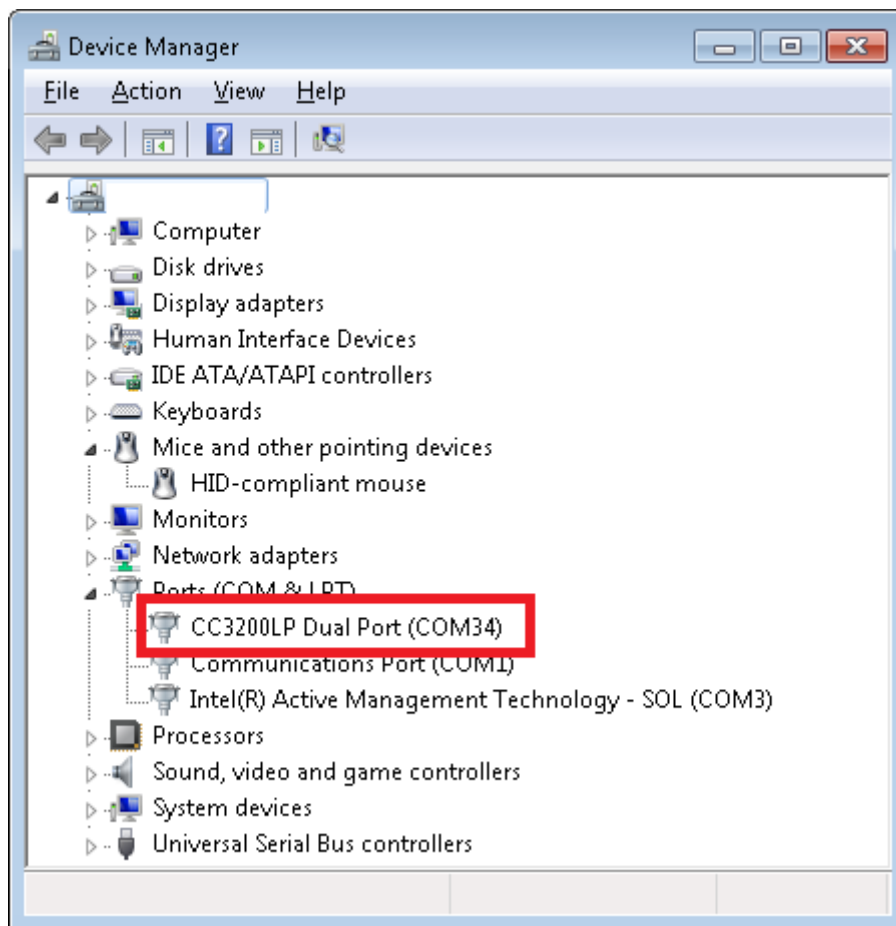

**Figure 2. Device Manager**

### 2.3 Update Service Pack

If the board is not already flashed with the service pack for SDK 1.2.0, the latest service pack for SDK 1.2.0 must be flashed on the CC3200. The latest service pack can be downloaded from <http://www.ti.com/tool/cc3200sdk>. Refer to the UNIFLASH Quick start guide for details on flashing the service pack to the CC3200 ([http://processors.wiki.ti.com/index.php/CC31xx\\_%26\\_CC32xx\\_UniFlash#Service\\_Pack\\_Programming](http://processors.wiki.ti.com/index.php/CC31xx_%26_CC32xx_UniFlash#Service_Pack_Programming)).

### 3 Compile, Download, and Debug

The CC3200 SDK supports CCS 6.1.1, IAR 7.30, and GCC IDE/compiler. The example shown here is *Getting Started with WLAN Station*, and performs the following functions:


1. Program restores WLAN configuration to factory default.
2. Switches to Station mode if the device is in AP mode.
3. Connects to the user's Access Point (default SSID is 'cc3200demo'). If the connection to the AP is successful, the red LED (D7) switches on.
4. Pings the user's AP. If the ping test is successful, the green LED (D5) switches on.
5. Pings to www.ti.com to check Internet connectivity. If the ping test is successful, the orange LED (D6) switches on.

This example uses a Real-Time Operating System (RTOS).

#### 3.1 Option 1: Code Composer Studio (CCS)

##### 3.1.1 Download and Install

Download and run the Code Composer Studio 6.1.1 (CCS) installation wizard (*ccs\_setup\_win32.exe*) from [http://processors.wiki.ti.com/index.php/Category:Code\\_Composer\\_Studio\\_v6](http://processors.wiki.ti.com/index.php/Category:Code_Composer_Studio_v6). The program must be Version 6.1.1.00022 or later. Select the Wireless Connectivity MCUs option for processor support. The remaining options for the installer should be left as the default. Installation time is typically 20 minutes, but can vary based on internet connection speed.

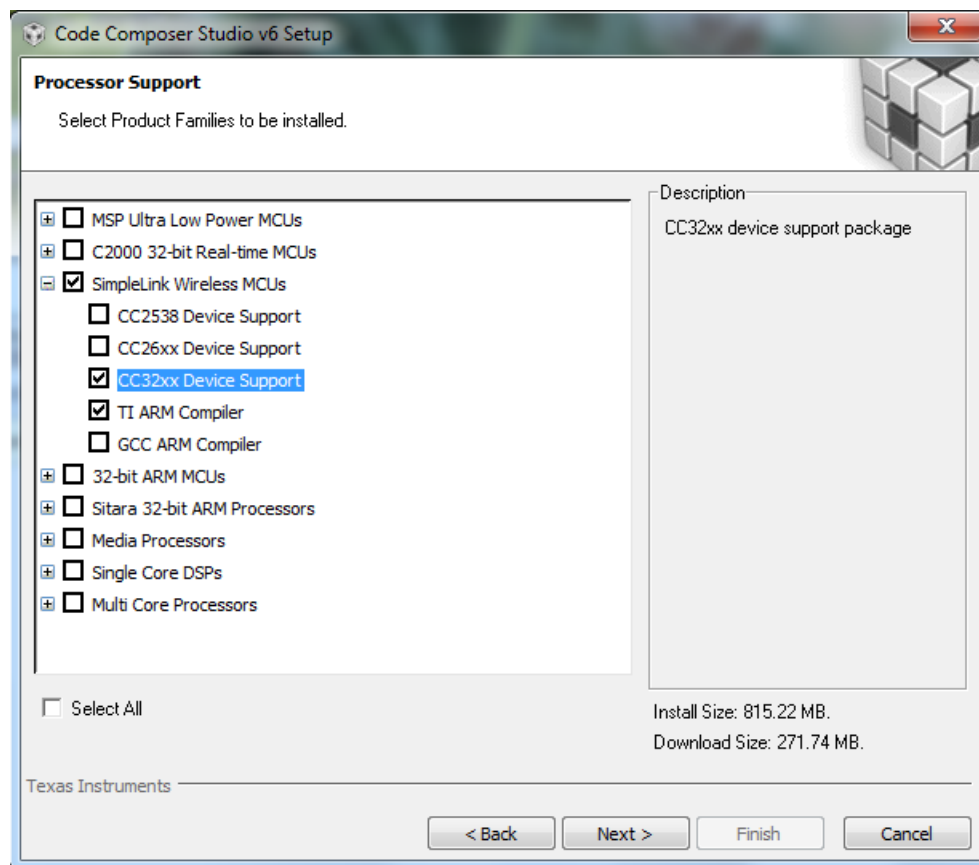


**Figure 3. Code Composer Studio v6 Setup**



### 3.1.2 Install TI-RTOS for SimpleLink and CC3200 Support Package

Install TI-RTOS for SimpleLink from the CCS App Center:


1. Start CCS, and choose a Workspace folder where the projects will reside.
2. Open the App Center from the Help->Getting Started screen.
3. Search 'CC3200' in the App Center to find 'TI-RTOS for SimpleLink' and 'CC3200 Add-On.'
4. Select TI-RTOS
5. The CC3200 add-on should already be installed. If not, select it.
6. Press Install Software

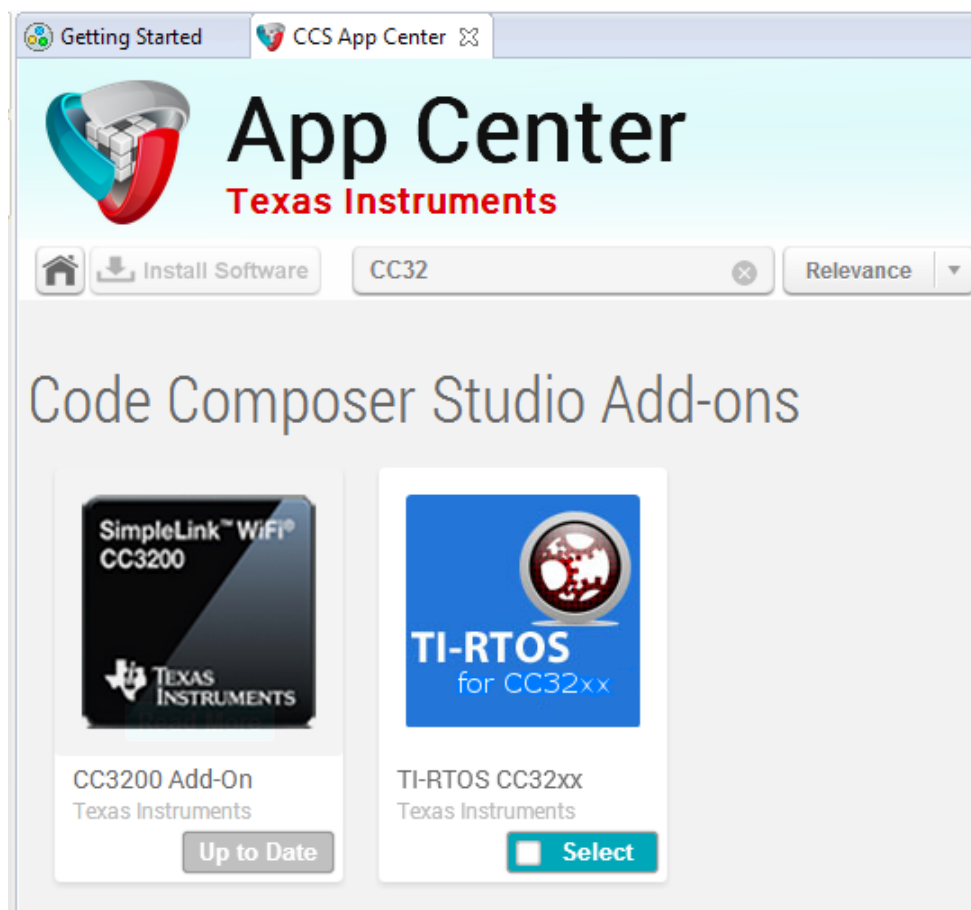

**Figure 4. CCS App Center**


### 3.1.3 Import and Configure Project

1. Choose Project>Import CCS Projects from the menu.
2. Select the Browse button in the Import CCS Eclipse Projects dialog, and Select the directory C:\TI\CC3200SDK\_1.2.0\cc3200-sdk.

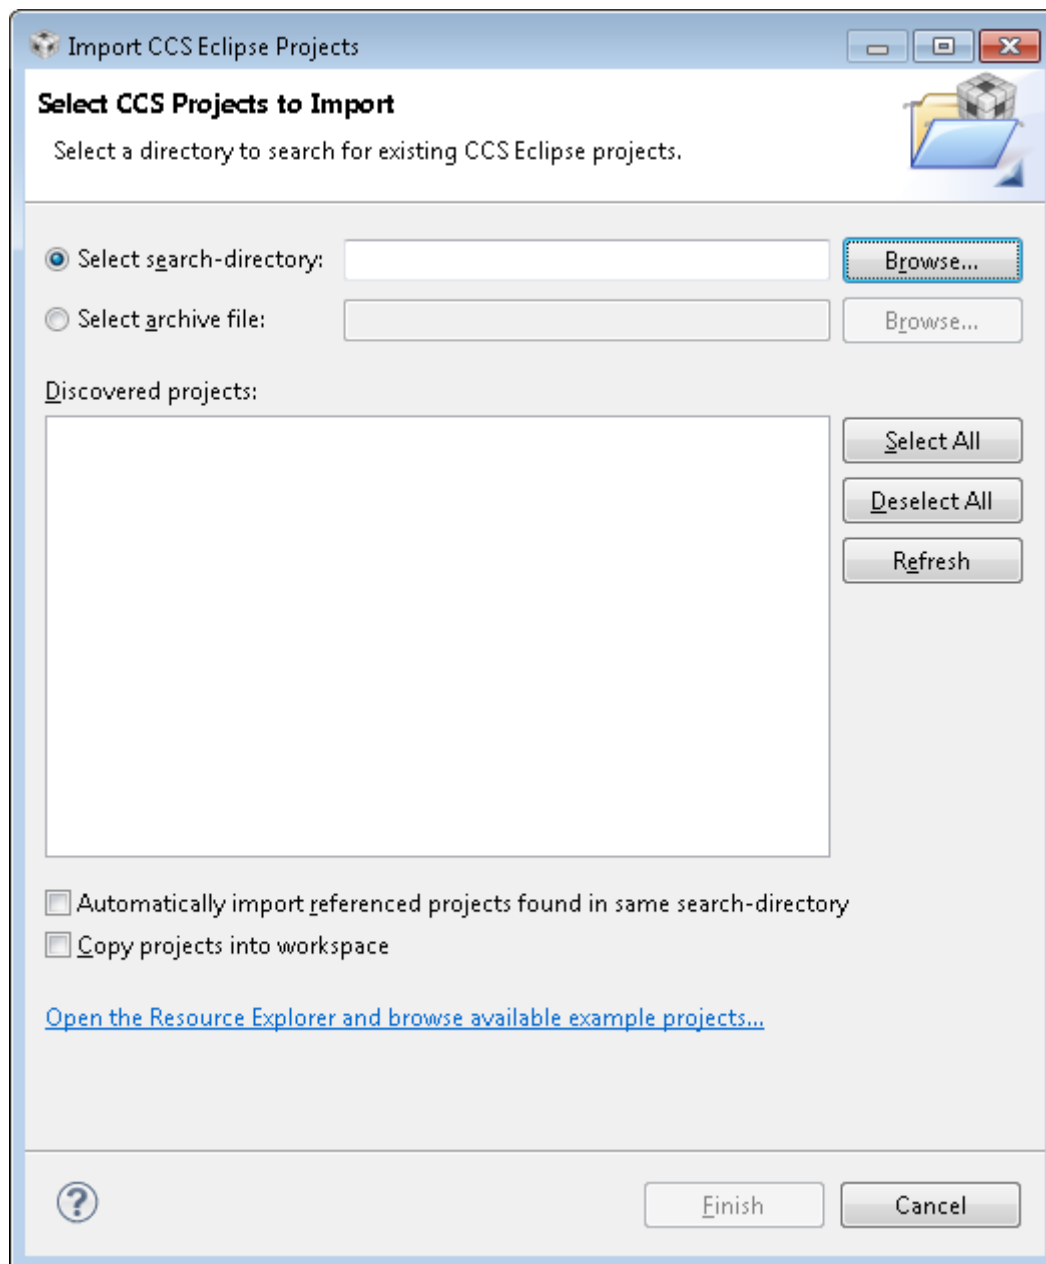


**Figure 5. Select CCS Projects to Import**

3. Select the wlan\_station, driverlib, simplelink, oslib, and ti\_rtos\_config projects. Click Finish. For any library import, do not check the 'Copy projects into workspace' option. This breaks the links from the libraries to their dependencies. The wlan\_station project is automatically copied to the workspace.

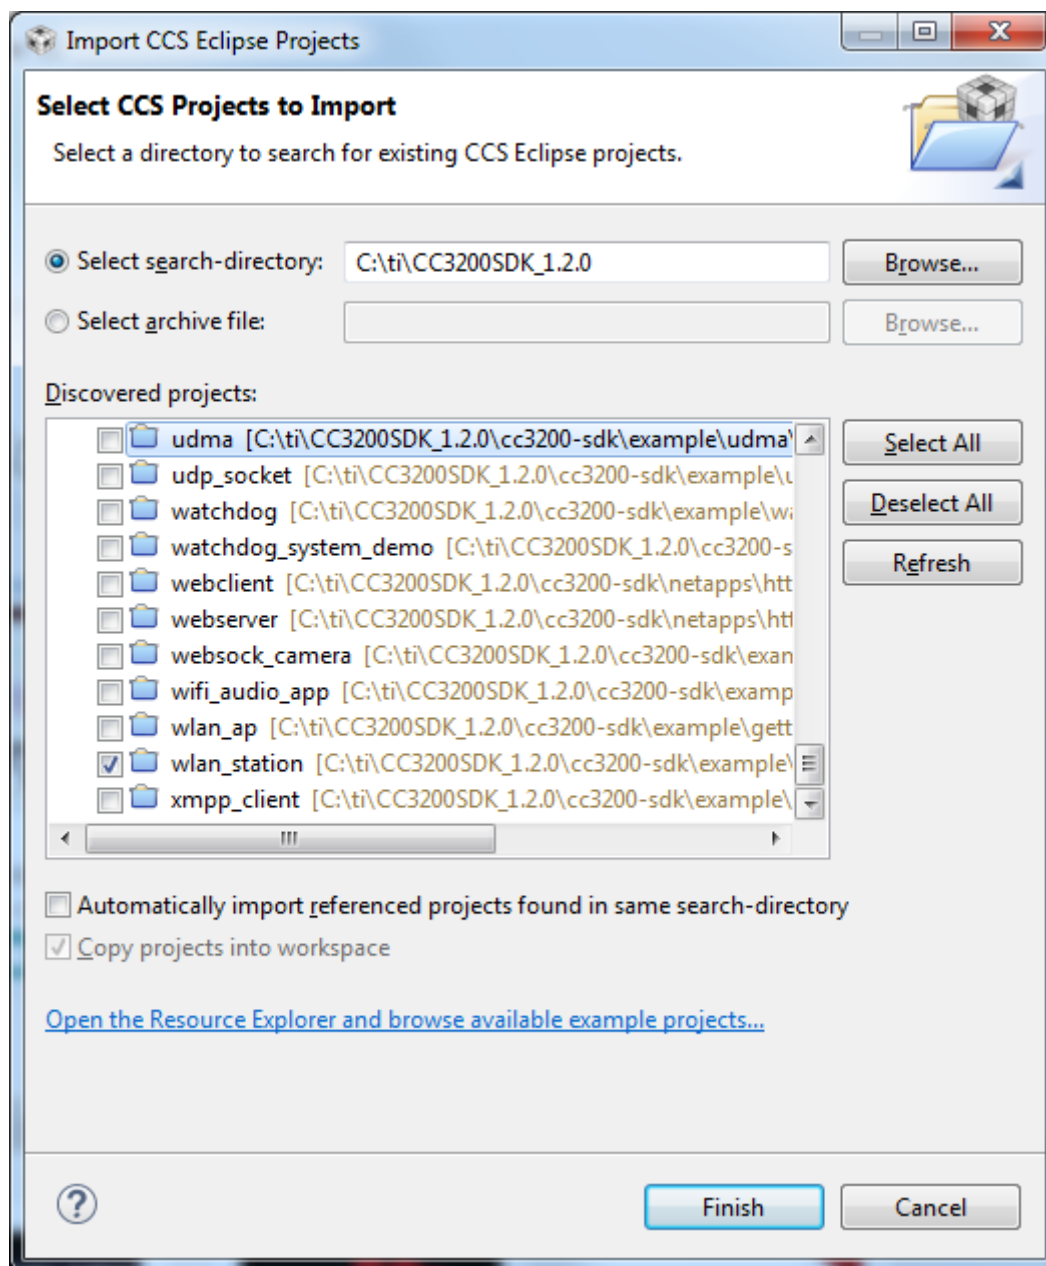

**Figure 6. Select CCS Projects to Import**

4. Select the `ti_rtos_config` project in Project Explorer, and select **Project>Properties** from the menu. Under General, select the RTSC tab as shown in Figure 7. Select the latest versions of XDCtools and TI-RTOS for SimpleLink (not shown in Figure 7). Also verify the platform is selected as `ti.platforms.simplelink:CC3200`.

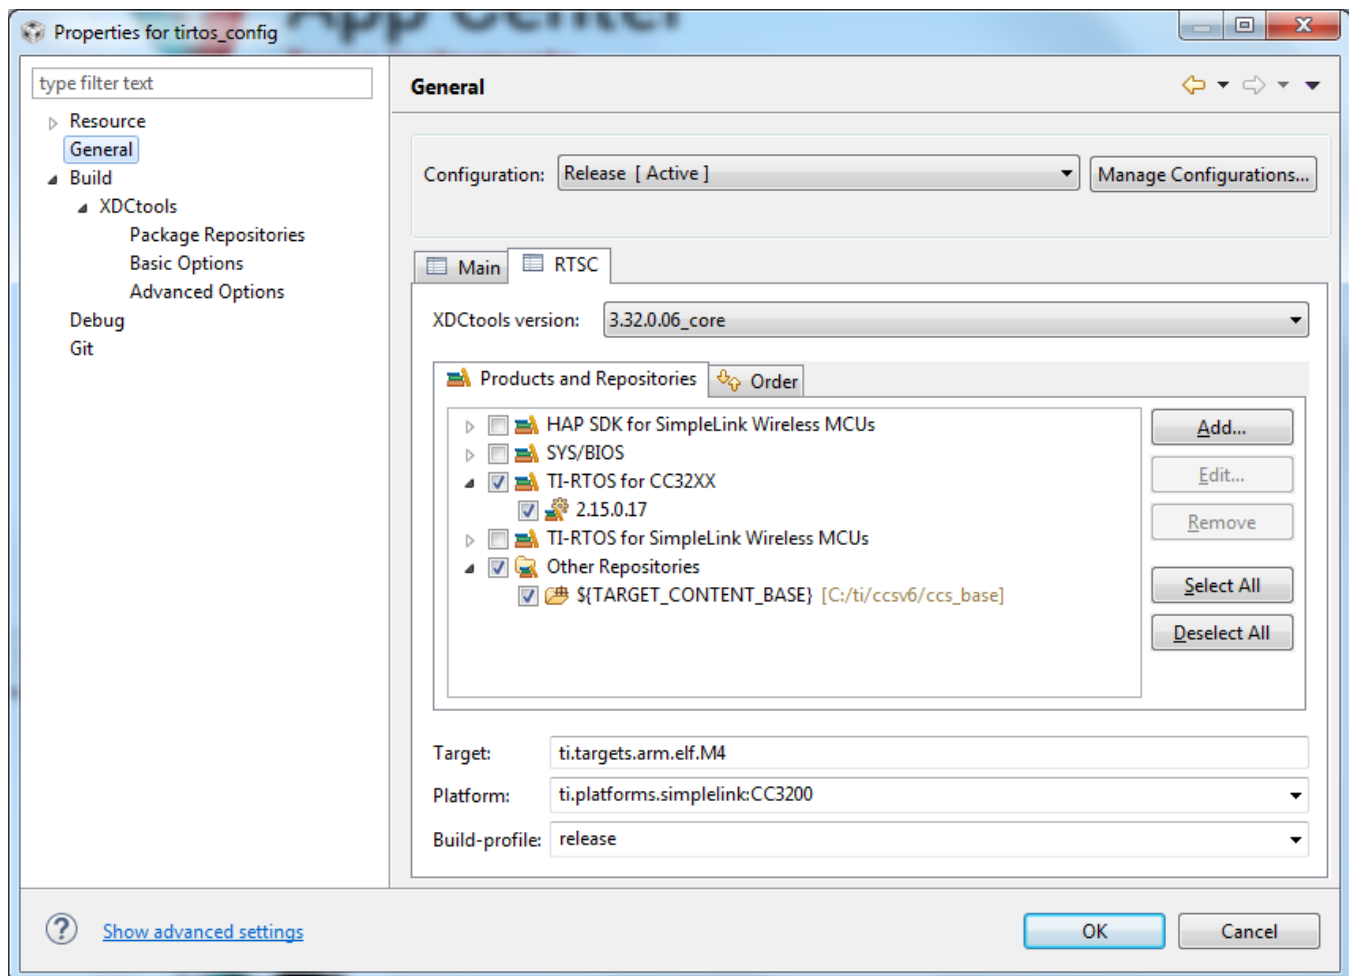

**Figure 7. Properties for ti\_rtos\_config**

5. Select the simplelink project and build it as shown in [Figure 8](#).

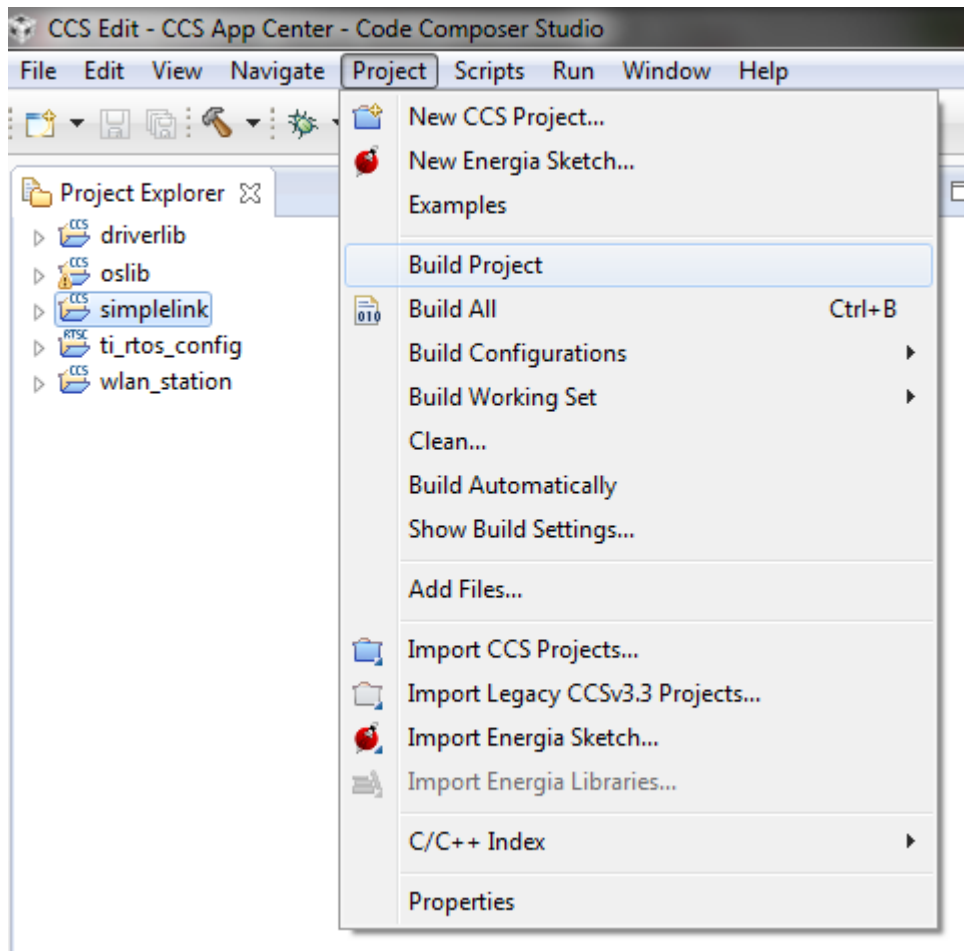


Figure 8. Select SimpleLink Project

6. Select the ti\_rtos\_config project and build it.
7. Select the driverlib project and build it.
8. Select ti\_rtos configuration for oslib project and build it.
9. Open the common.h file located at the path C:\TI\CC3200SDK\_1.2.0\cc3200-sdk\example\common\.
10. Edit common.h to use the SSID, security type, and security key of the AP. Edit the macros SSID\_NAME, SECURITY\_TYPE, and SECURITY\_KEY to contain the AP information as shown in Figure 9. The security types supported for this demo are WPA/WPA2 and Open. For Open security, define SECURITY\_TYPE as SL\_SEC\_TYPE\_OPEN. For WPA and WPA2 security, define it as SL\_SEC\_TYPE\_WPA. Alternatively, the SSID and security of the AP can be changed to match the default (SSID: cc3200demo, Security: Open). For the SSID\_NAME and SECURITY\_KEY, the quotation marks must remain as part of the macro definition.


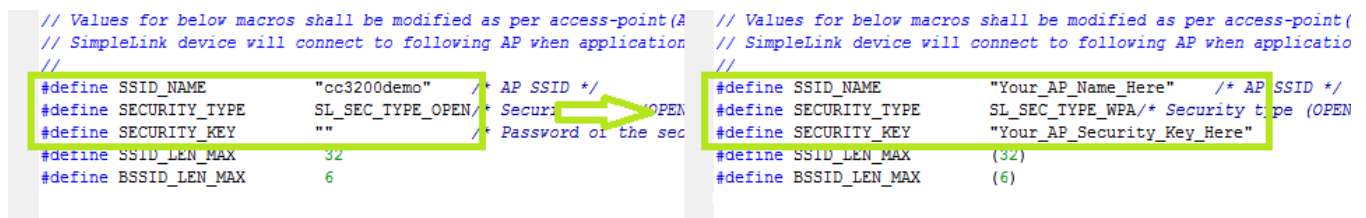


Figure 9. Editing common.h


11. Save common.h.

12. Select the wlan\_station project and build it.
13. The target configuration must be set before debugging from CCS. Navigate to View>Target Configurations.

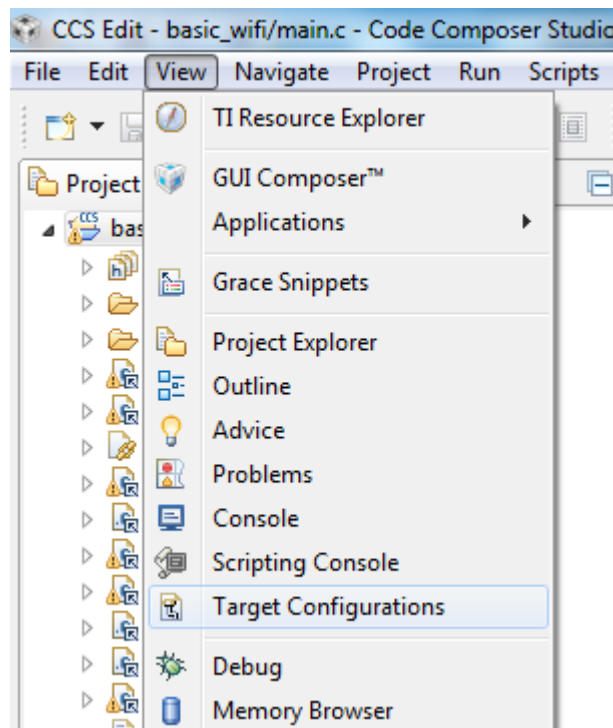


**Figure 10. Target Configurations**

14. Right-click on User Defined, select Import Target Configuration and select the file CC3200.ccxml from C:\TI\CC3200SDK\_1.2.0\cc3200-sdk\tools\ccs\_patch\. Select the Copy files option when prompted.

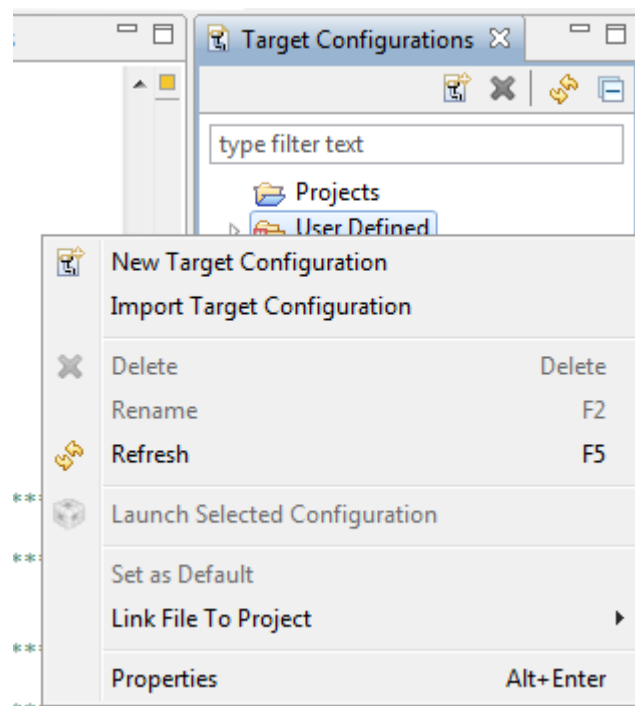

**Figure 11. Import Target Configuration**


15. Set this new configuration as the default by right-clicking on the file name, as shown in [Figure 12](#).

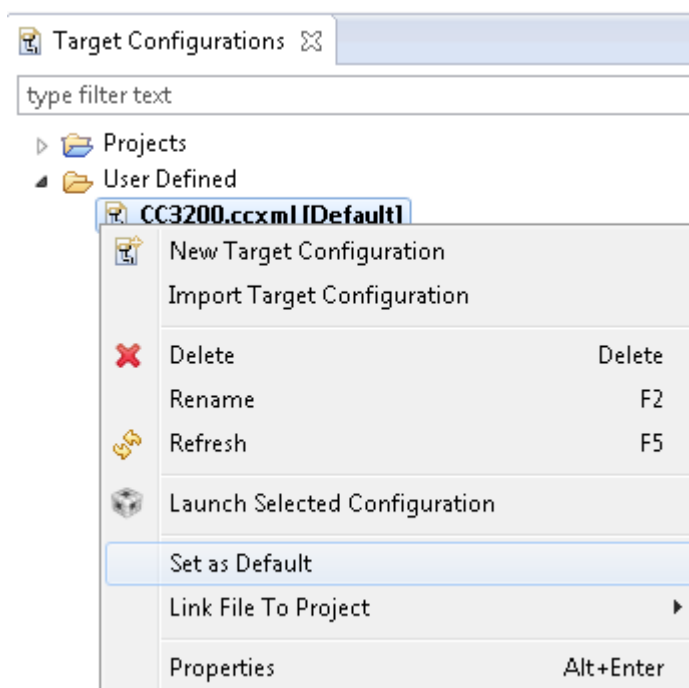

**Figure 12. Set as Default**


**Caution:** Only one FTDI board should be connected to the PC while CCS downloads code to the device.

16. Launch Tera Term, and create a new serial connection to the CC3200 Launchpad COM port as shown in [Figure 13](#).

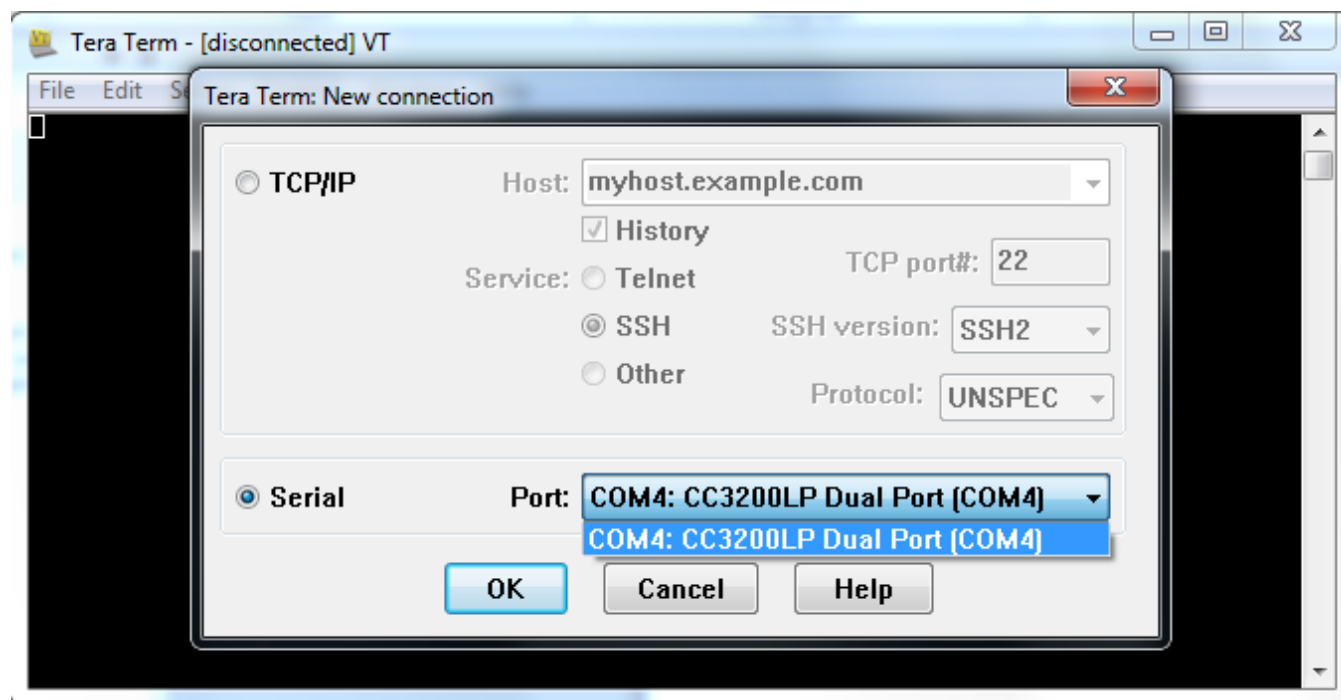


**Figure 13. Launch Tera Term**

17. In the menu, select Setup>Serial Port, and change the baud rate to 115200 as shown in [Figure 14](#).

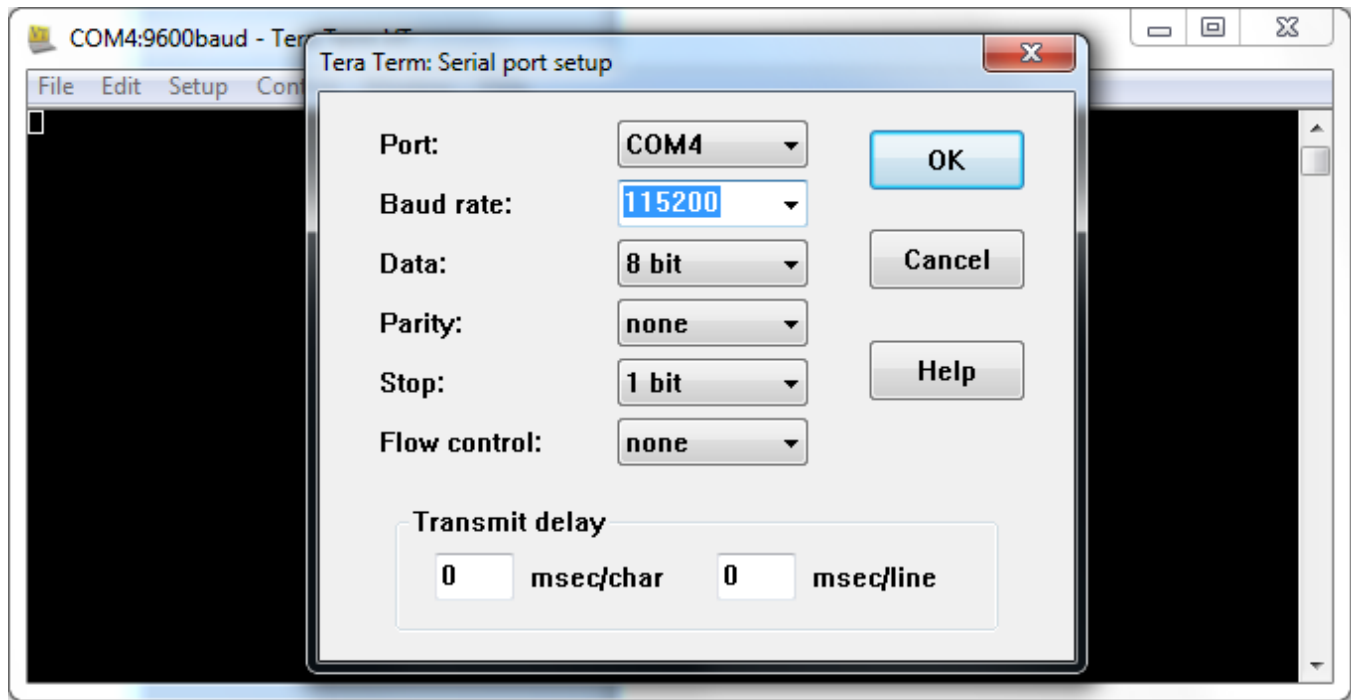

**Figure 14. Tera Term Serial Port Setup**


18. Launch application: select the wlan\_station project in Project Explorer, then click the debug icon as shown in [Figure 15](#) to download code to the device and begin debugging. Press F8 to begin execution.

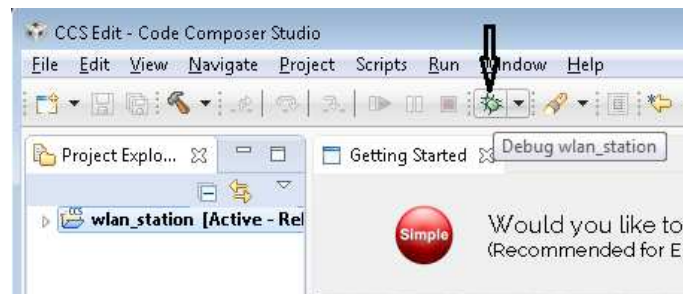

**Figure 15. Debug wlan\_station**

19. If the CC3200 successfully completes all steps, the serial output appears as shown in [Figure 16](#).



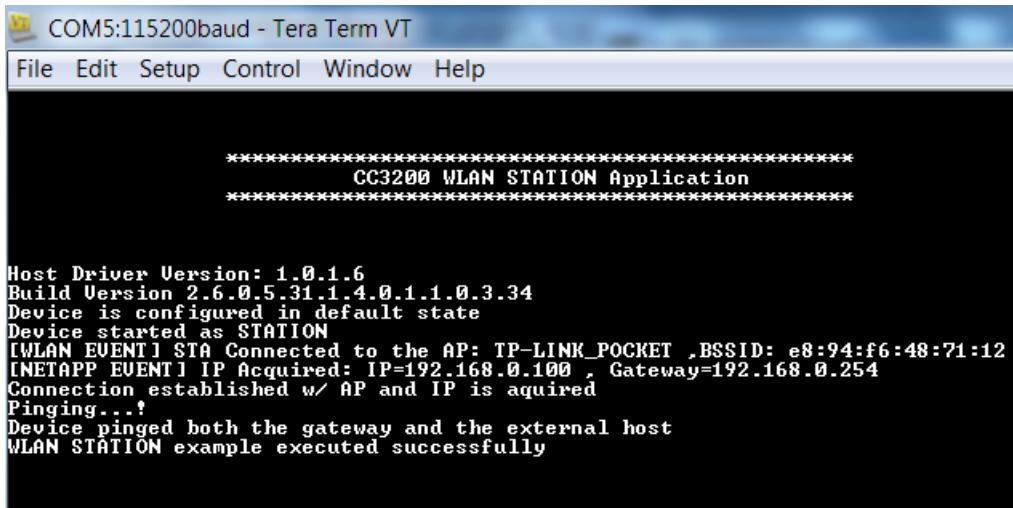

```

COM5:115200baud - Tera Term VT
File Edit Setup Control Window Help

*****
CC3200 WLAN STATION Application
*****

Host Driver Version: 1.0.1.6
Build Version 2.6.0.5.31.1.4.0.1.1.0.3.34
Device is configured in default state
Device started as STATION
[WLAN EVENT] STA Connected to the AP: TP-LINK_POCKET ,BSSID: e8:94:f6:48:71:12
[INETAPP EVENT] IP Acquired: IP=192.168.0.100 , Gateway=192.168.0.254
Connection established w/ AP and IP is aquired
Pinging...!
Device pinged both the gateway and the external host
WLAN STATION example executed successfully
  
```

**Figure 16. Tera Term VT**

## 3.2 Option 2: IAR Workbench


### 3.2.1 Download IAR

The CC3200 SDK has been built and tested with IAR 7.30, and older versions of IAR projects might not work properly on IAR 7.30. Most examples will only run with the fully licensed IAR Workbench.

1. Download IAR for ARM processors from the IAR System website, and install it using the installation wizard.
2. If using IAR version 7.20 or earlier, copy the file `C:\TI\CC3200SDK_1.2.0\CC3200-sdk\tools\iar_patch\armLMIFTDI.dll` into the folder `C:\Program Files (x86)\IAR Systems\Embedded Workbench 7.0\arm\bin` (the user must replace the existing file).


### 3.2.2 Rebuild the SimpleLink Driver

1. Start IAR and select File>Open>Workspace from the menu.

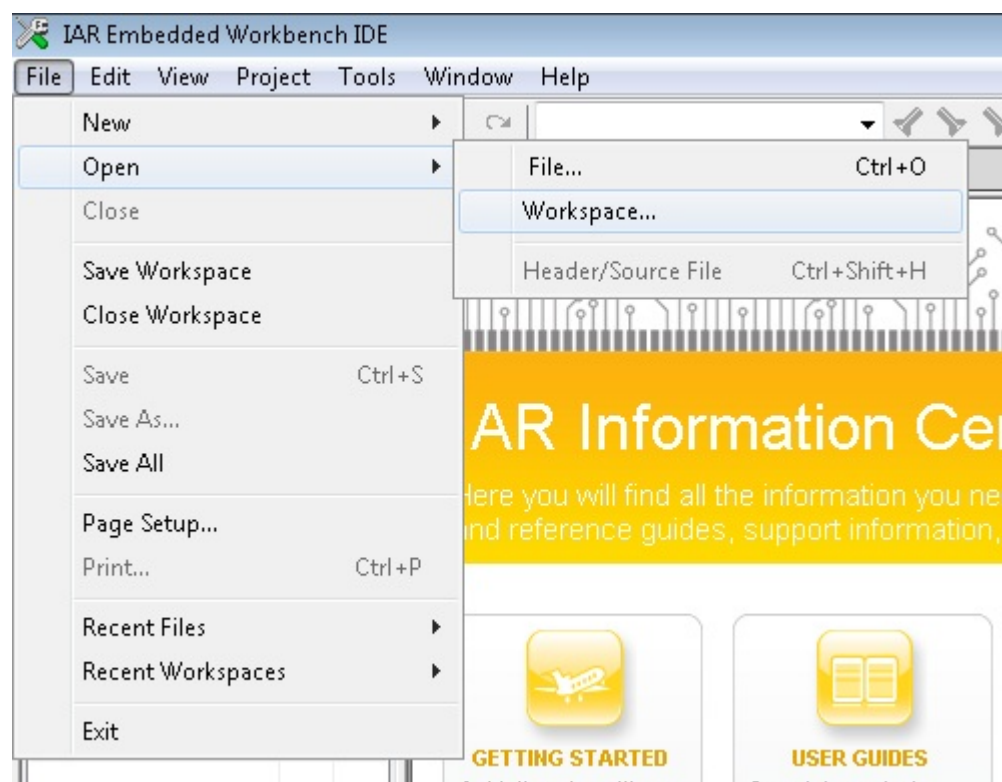


**Figure 17. IAR Embedded Workbench IDE**

2. Open the simplelink project by navigating to `C:\TI\CC3200SDK_1.2.0\cc3200-sdk\simplelink\ewarm` and opening `simplelink.eww`.

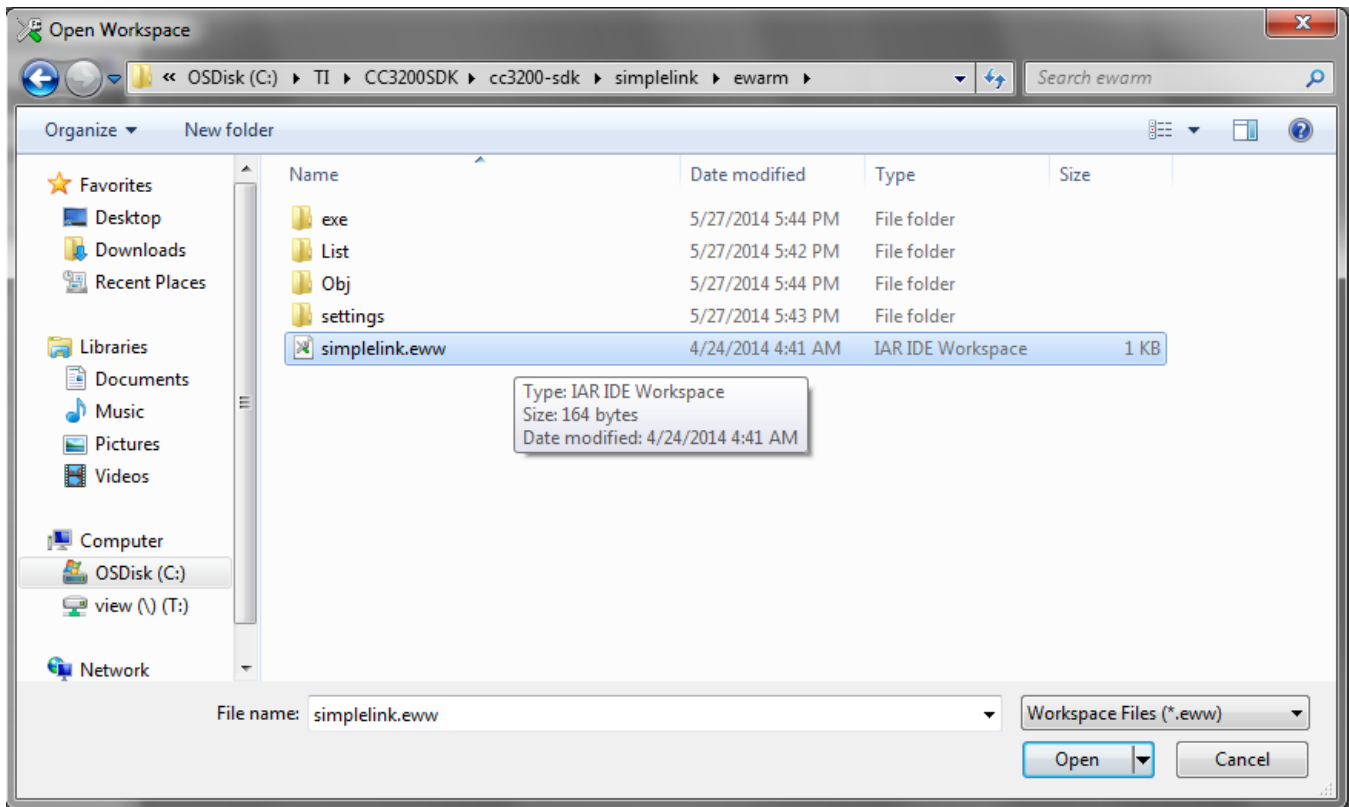

**Figure 18. Open simplelink.eww**

3. Rebuild the simplelink project by selecting Project>Rebuild All from the menu, as shown in [Figure 19](#).

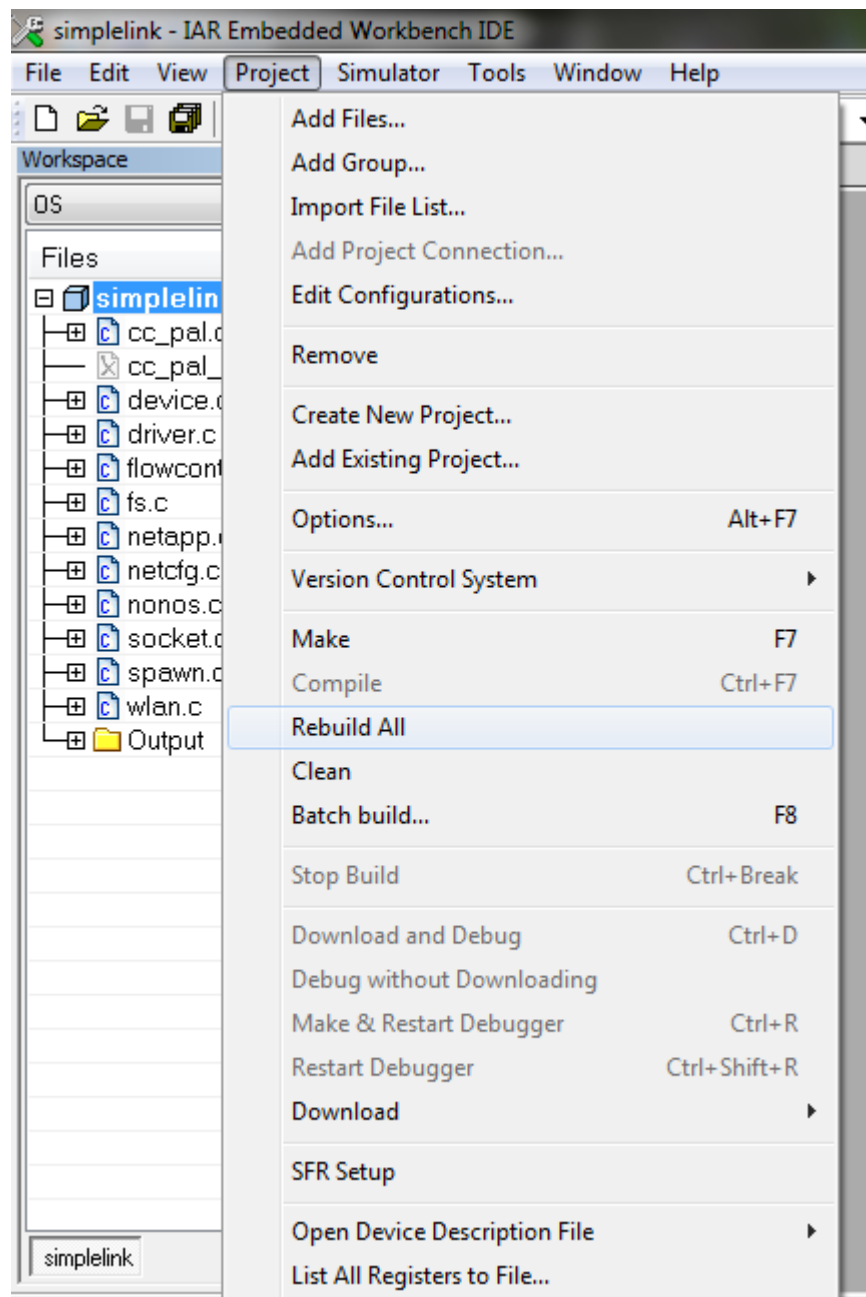

**Figure 19. Rebuild the simplelink Project.**

### 3.2.3 Rebuild, Download and Debug the WLAN Station Example


1. Open the wlan\_station project by selecting File>Open>Workspace from the menu, navigating to `C:\TI\CC3200SDK_1.2.0\cc3200-sdk\example\getting_started_with_wlan_station\warm`, and opening `wlan_station.eww`.
2. Open the common.h file located at the path `C:\TI\CC3200SDK_1.2.0\cc3200-sdk\example\common\`.
3. Edit common.h to use the SSID, security type, and security key of the AP. Edit the macros `SSID_NAME`, `SECURITY_TYPE`, and `SECURITY_KEY` to contain the AP information as shown in [Figure 20](#). The security types supported for this demo are WPA/WPA2 and Open. For Open security, define `SECURITY_TYPE` as `SL_SEC_TYPE_OPEN`. For WPA and WPA2 security, define it as `SL_SEC_TYPE_WPA`.

```
// Values for below macros shall be modified as per access-point(A
// SimpleLink device will connect to following AP when application
//
#define SSID_NAME "cc3200demo" /* AP SSID */
#define SECURITY_TYPE SL_SEC_TYPE_OPEN /* Security type (OPEN)
#define SECURITY_KEY "" /* Password of the sec
#define SSID_LEN_MAX 32
#define BSSID_LEN_MAX 6

// Values for below macros shall be modified as per access-point(A
// SimpleLink device will connect to following AP when applicatio
//
#define SSID_NAME "Your_AP_Name_Here" /* AP SSID */
#define SECURITY_TYPE SL_SEC_TYPE_WPA /* Security type (OPEN)
#define SECURITY_KEY "Your_AP_Security_Key_Here"
#define SSID_LEN_MAX (32)
#define BSSID_LEN_MAX (6)
```


**Figure 20. Editing common.h**

4. Save common.h.
5. Rebuild the wlan\_station project by selecting Project>Rebuild All from the menu.
6. The debugger must be configured to download code to the device. Select Project>Options from the menu, and select the Debugger category. In the Setup tab, choose TI Stellaris as the driver, as shown in [Figure 21](#), and press OK.

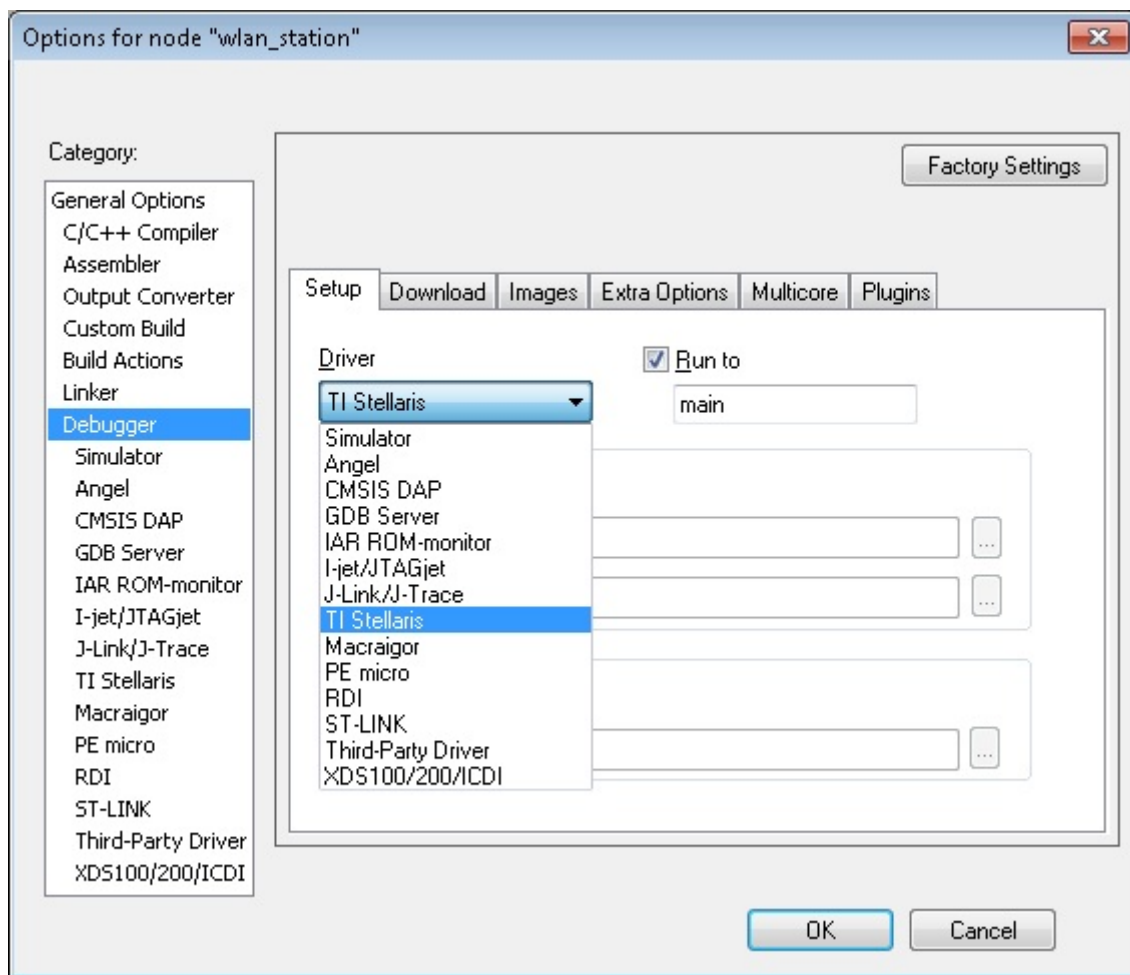


**Figure 21. Select TI Stellaris Driver**

7. Launch Tera Term, and create a new serial connection to the CC3200 Launchpad COM port as shown in [Figure 22](#).

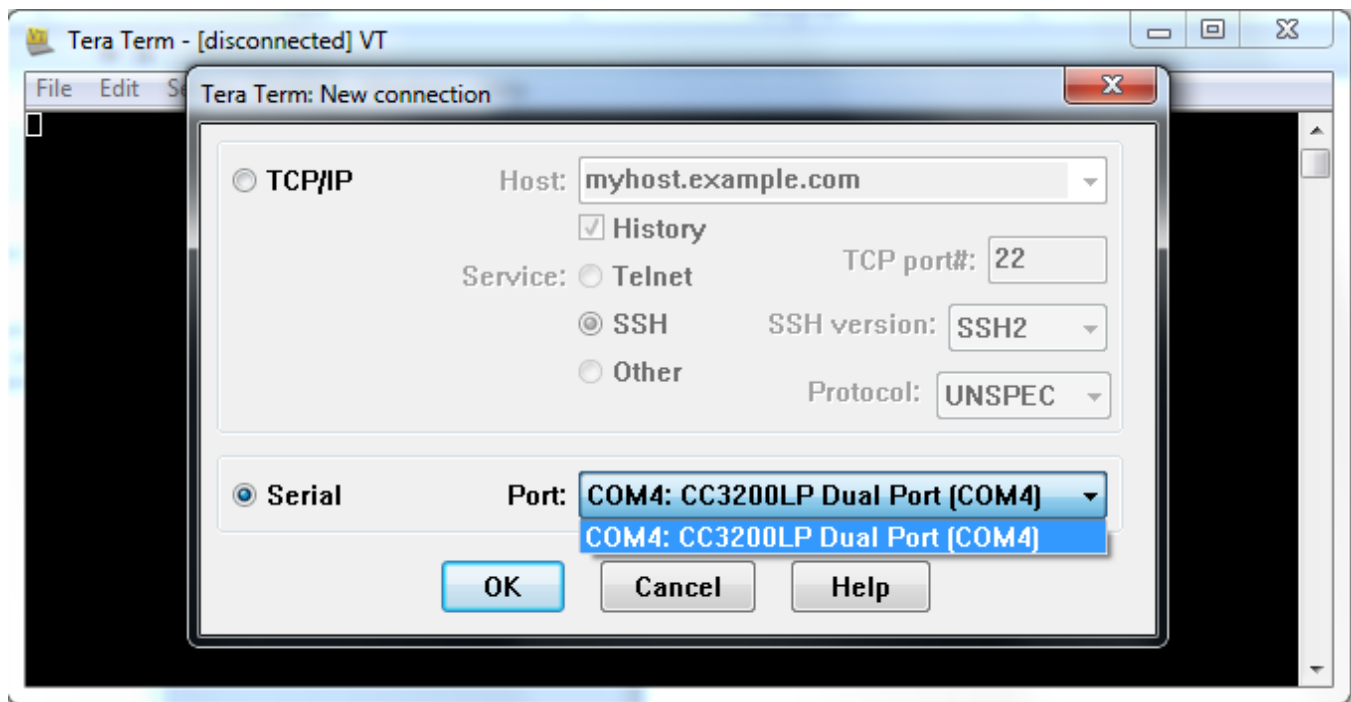


**Figure 22. Launch Tera Term**

8. In the menu, select Setup>Serial Port, and change the baud rate to 115200 as shown in [Figure 23](#).

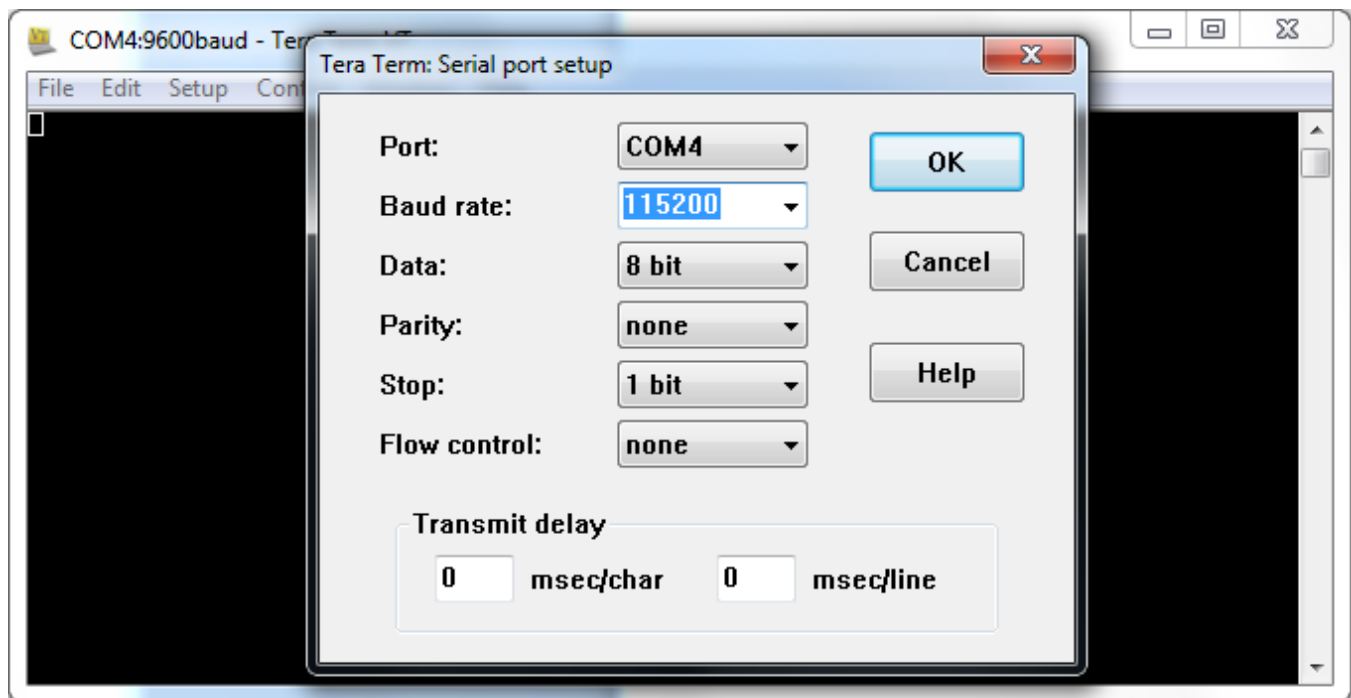


**Figure 23. Tera Term Serial Port Setup**

9. Click the debug icon as shown in [Figure 24](#) to download code to the device and start debugging. Select Debug>Go from the menu, or press F5 to begin execution.

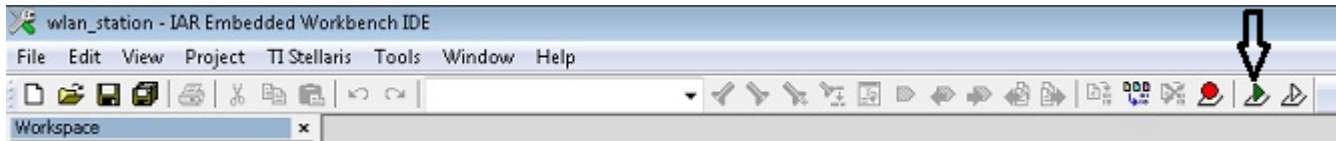

**Figure 24. Debug Icon**

10. If the CC3200 successfully completes all steps, the serial output appears as shown in [Figure 25](#).

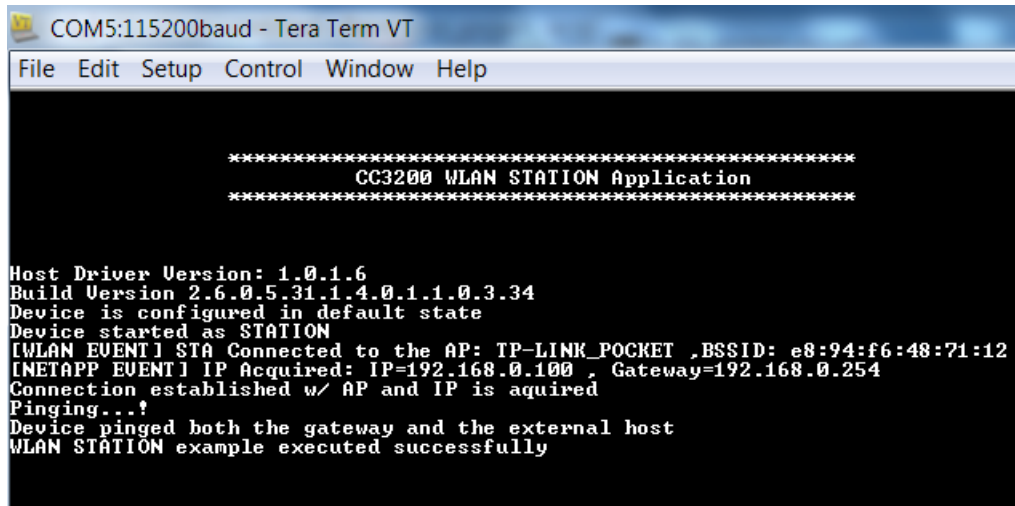

```

*****
CC3200 WLAN STATION Application
*****

Host Driver Version: 1.0.1.6
Build Version 2.6.0.5.31.1.4.0.1.1.0.3.34
Device is configured in default state
Device started as STATION
[WLAN EVENT] STA Connected to the AP: TP-LINK_POCKET ,BSSID: e8:94:f6:48:71:12
[NETAPP EVENT] IP Acquired: IP=192.168.0.100 , Gateway=192.168.0.254
Connection established w/ AP and IP is aquired
Pinging...!
Device pinged both the gateway and the external host
WLAN STATION example executed successfully

```

**Figure 25. Tera Term VT**

### 3.3 Option 3: GCC


This section demonstrates the GCC setup only for the Windows environment. GCC installation requires other dependencies to be installed to work with ARM-based devices.

#### 3.3.1 Install Cygwin (Windows)


1. Download setup-x86.exe from <http://cygwin.com/install.html> and run it. Select the Install from Internet option.
2. Specify a proxy if necessary, depending on the network.
3. Choose a download site (for example, <http://mirrors.kernel.org>).
4. Include the latest versions of the following packages in the Cygwin installation (in addition to those included in the base installation):
  - Archive/unzip
  - Archive/zip
  - Devel/autoconf
  - Devel/automake
  - Devel/libtool
  - Devel/make
  - Devel/subversion (**Note:** if using TortoiseSVN/Windows7, skip this file)
  - Devel/gcc-core
  - Devel/gcc-g++
  - Devel/mingw-gcc-core
  - Devel/mingw-gcc-g++
  - Devel/mingw-runtime





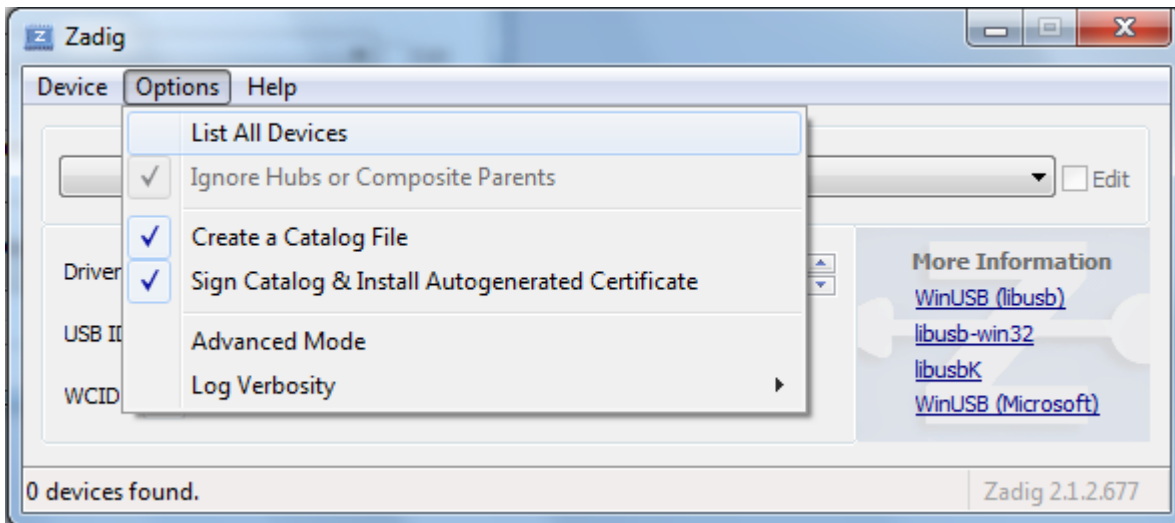


**Figure 27. Zadig Options**

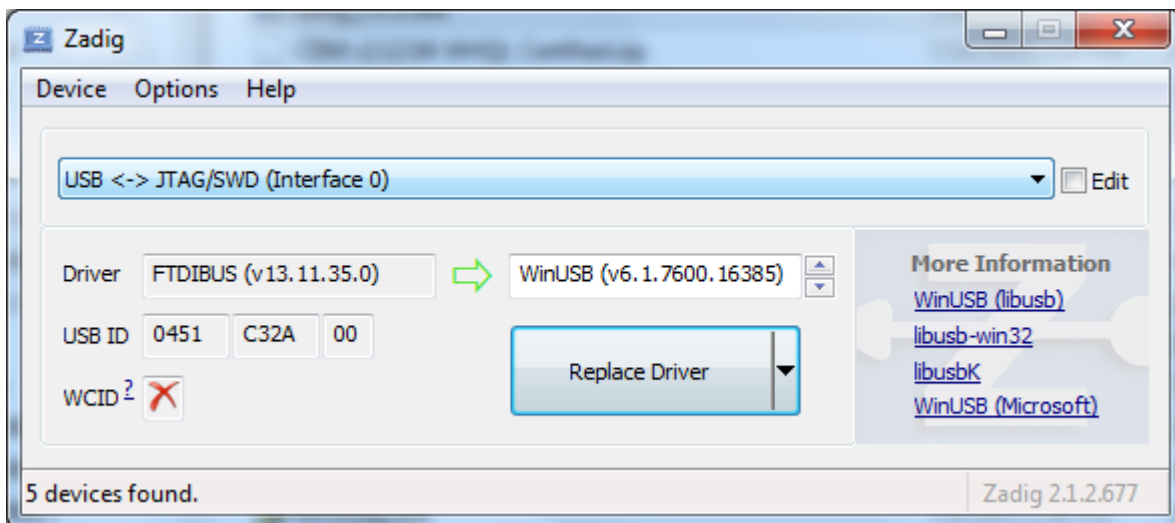

**Figure 28. Replace Driver**

### 3.3.4 Compile the GCC SDK Project

1. Open the common.h file located at the path `C:\TI\CC3200SDK_1.2.0\cc3200-sdk\example\common\`.
2. Edit common.h to use the SSID, security type, and security key of the AP. Edit the macros `SSID_NAME`, `SECURITY_TYPE`, and `SECURITY_KEY` to contain the AP information as shown in [Figure 29](#). The security types supported for this demo are WPA/WPA2 and Open. For Open security, define `SECURITY_TYPE` as `SL_SEC_TYPE_OPEN`. For WPA and WPA2 security, define it as `SL_SEC_TYPE_WPA`.

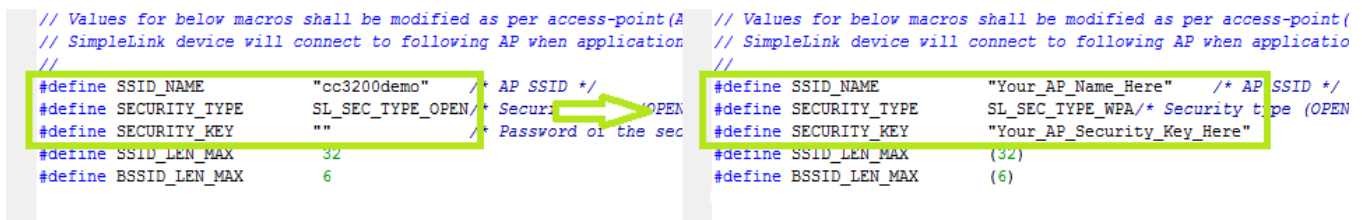

```
// Values for below macros shall be modified as per access-point(A // Values for below macros shall be modified as per access-point(
// SimpleLink device will connect to following AP when application // SimpleLink device will connect to following AP when applicatio
//
#define SSID_NAME "cc3200demo" /* AP SSID */
#define SECURITY_TYPE SL_SEC_TYPE_OPEN /* Security type (OPEN)
#define SECURITY_KEY "" /* Password of the sec
#define SSID_LEN_MAX 32
#define BSSID_LEN_MAX 6

#define SSID_NAME "Your_AP_Name_Here" /* AP SSID */
#define SECURITY_TYPE SL_SEC_TYPE_WPA /* Security type (OPEN)
#define SECURITY_KEY "Your_AP_Security_Key_Here"
#define SSID_LEN_MAX (32)
#define BSSID_LEN_MAX (6)
```

**Figure 29. Editing common.h**

3. Save common.h.
4. In the Cygwin terminal, change the directory to `C:\TI\CC3200SDK_1.2.0\cc3200-sdk\example\getting_started_with_wlan_station\gcc\` and run the following command:  

```
make -f Makefile
```

Note that Cygwin uses forward slashes to separate the directories.
5. Go to `<cc3200-sdk>\example\getting_started_with_wlan_station\gcc\` in the command prompt and run following command:  


```
make -f Makefile
```
6. This generates the wlan\_station.axf file under the gcc\exe folder.

### 3.3.5 Target Connection and Debugging (GDB)

1. The OpenOCD configuration file for FTDI is present under the `C:\TI\CC3200SDK_1.2.0\cc3200-sdk\tools\gcc_scripts\` folder. To test the connection to the CC3200 FTDI Launchpad, navigate to the `<cc3200-sdk>\tools\gcc_scripts` folder, run the following command at the Cygwin prompt window, and check the output to see if the connection happened properly. Cygwin may need to be restarted before this step.  

```
openocd -f cc3200.cfg
```

See [Figure 30](#) for the connection output screen while the CC3200 device is connected through GDB.

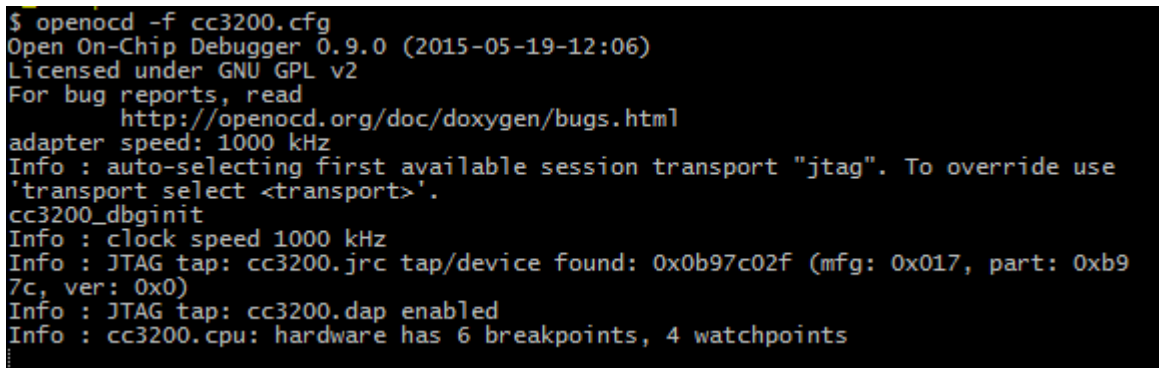

```
$ openocd -f cc3200.cfg
Open On-Chip Debugger 0.9.0 (2015-05-19-12:06)
Licensed under GNU GPL v2
For bug reports, read
  http://openocd.org/doc/doxygen/bugs.html
adapter speed: 1000 kHz
Info : auto-selecting first available session transport "jtag". To override use
'transport select <transport>'.
cc3200_dbginit
Info : clock speed 1000 kHz
Info : JTAG tap: cc3200.jrc tap/device found: 0x0b97c02f (mfg: 0x017, part: 0xb9
7c, ver: 0x0)
Info : JTAG tap: cc3200.dap enabled
Info : cc3200.cpu: hardware has 6 breakpoints, 4 watchpoints
```

**Figure 30. Output Screen**

2. Press `<ctrl>+c` to return to prompt.
3. Copy the wlan\_station.axf file found in `C:\TI\CC3200SDK_1.2.0\cc3200-sdk\example\getting_started_with_wlan_station\gcc\exe\` to the directory `C:\TI\CC3200SDK_1.2.0\cc3200-sdk\tools\gcc_scripts\`.
4. Launch Tera Term, and create a new serial connection to the CC3200 Launchpad COM port.
5. To start debugging using GDB on CC3200, go to `C:\TI\CC3200SDK_1.2.0\cc3200-sdk\tools\gcc_scripts\` and run the following command at the Cygwin prompt:  

```
arm-none-eabi-gdb -x gdbinit wlan_station.axf
```


```
$ arm-none-eabi-gdb -x gdbinit wlan_station.axf
GNU gdb (GNU Tools for ARM Embedded Processors) 7.8.0.20150604-cvs
Copyright (C) 2014 Free Software Foundation, Inc.
License GPLv3+: GNU GPL version 3 or later <http://gnu.org/licenses/gpl.html>
This is free software: you are free to change and redistribute it.
There is NO WARRANTY, to the extent permitted by law. Type "show copying"
and "show warranty" for details.
This GDB was configured as "--host=i686-w64-mingw32 --target=arm-none-eabi".
Type "show configuration" for configuration details.
For bug reporting instructions, please see:
<http://www.gnu.org/software/gdb/bugs/>.
Find the GDB manual and other documentation resources online at:
<http://www.gnu.org/software/gdb/documentation/>.
For help, type "help".
Type "apropos word" to search for commands related to "word"...
Reading symbols from wlan_station.axf...done.
Open On-Chip Debugger 0.9.0 (2015-05-19-12:06)
Licensed under GNU GPL v2
For bug reports, read
  http://openocd.org/doc/doxygen/bugs.html
0x20007940 in _s1_HandleAsync_PingResponse (pVoidBuf=0x8d1d)
  at ../source/netapp.c:1007
1007         if (NULL != g_pCB->ObjPool[g_pCB->FunctionParams.AsyncExt.ActionIndex].pRespArgs)
Loading section .text, size 0xcd28 lma 0x20004000
Loading section .ARM, size 0x8 lma 0x20010d28
Loading section .data, size 0x898 lma 0x20010d30
Start address 0x200053c4, load size 54728
Transfer rate: 65 KB/sec, 3648 bytes/write.
Breakpoint 1 at 0x20004f16: file ../main.c, line 946.

Breakpoint 1, main () at ../main.c:946
946     long lRetVal = -1;
(gdb) :
```

**Figure 31. Debugging wlan\_station**

This results in a GDB prompt. To continue, type 'continue' and press enter.

6. If the CC3200 successfully completes all steps, the serial output appears as shown in [Figure 32](#). See [Figure 31](#) for the result of debugging the wlan\_station application from GCC.

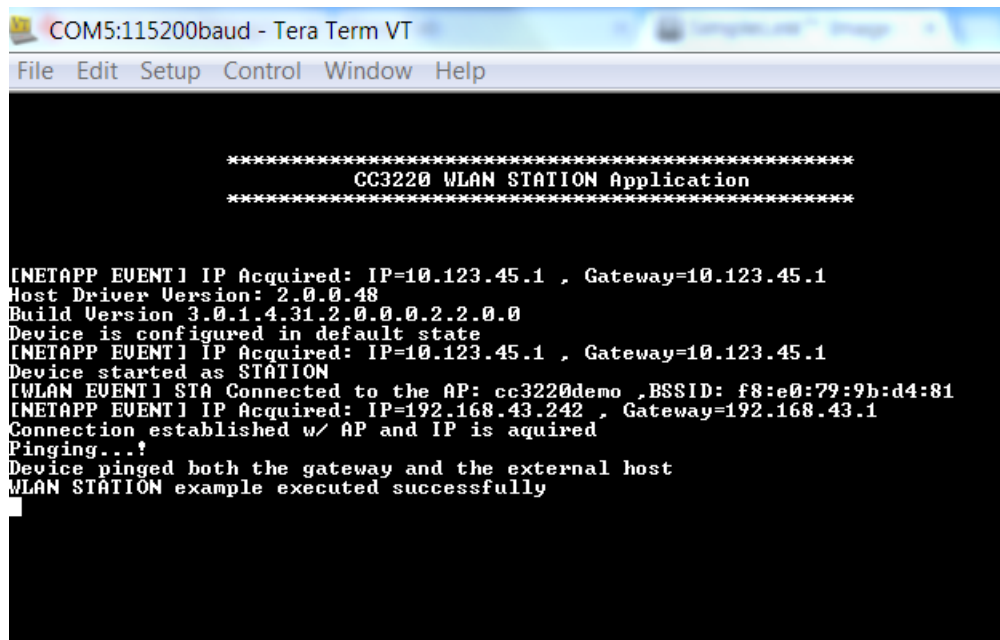

```
COM5:115200baud - Tera Term VT
File Edit Setup Control Window Help

*****
CC3220 WLAN STATION Application
*****


[NETAPP EVENT] IP Acquired: IP=10.123.45.1 , Gateway=10.123.45.1
Host Driver Version: 2.0.0.48
Build Version 3.0.1.4.31.2.0.0.0.2.2.0.0
Device is configured in default state
[NETAPP EVENT] IP Acquired: IP=10.123.45.1 , Gateway=10.123.45.1
Device started as STATION
[WLAN EVENT] STA Connected to the AP: cc3220demo ,BSSID: f8:e0:79:9b:d4:81
[NETAPP EVENT] IP Acquired: IP=192.168.43.242 , Gateway=192.168.43.1
Connection established w/ AP and IP is aquired
Pinging...!
Device pinged both the gateway and the external host
WLAN STATION example executed successfully
```

**Figure 32. Tera Term VT**

### 3.3.6 Driver Reconfiguration

1. To work with CCS or IAR, go to the device manager.

2. Update the driver software for USB<->JTAG/SWD (Interface 0) under Universal Serial Bus devices.
3. Select the <cc3200-sdk>\tools\ftdi folder for the driver update, as shown in [Figure 33](#).

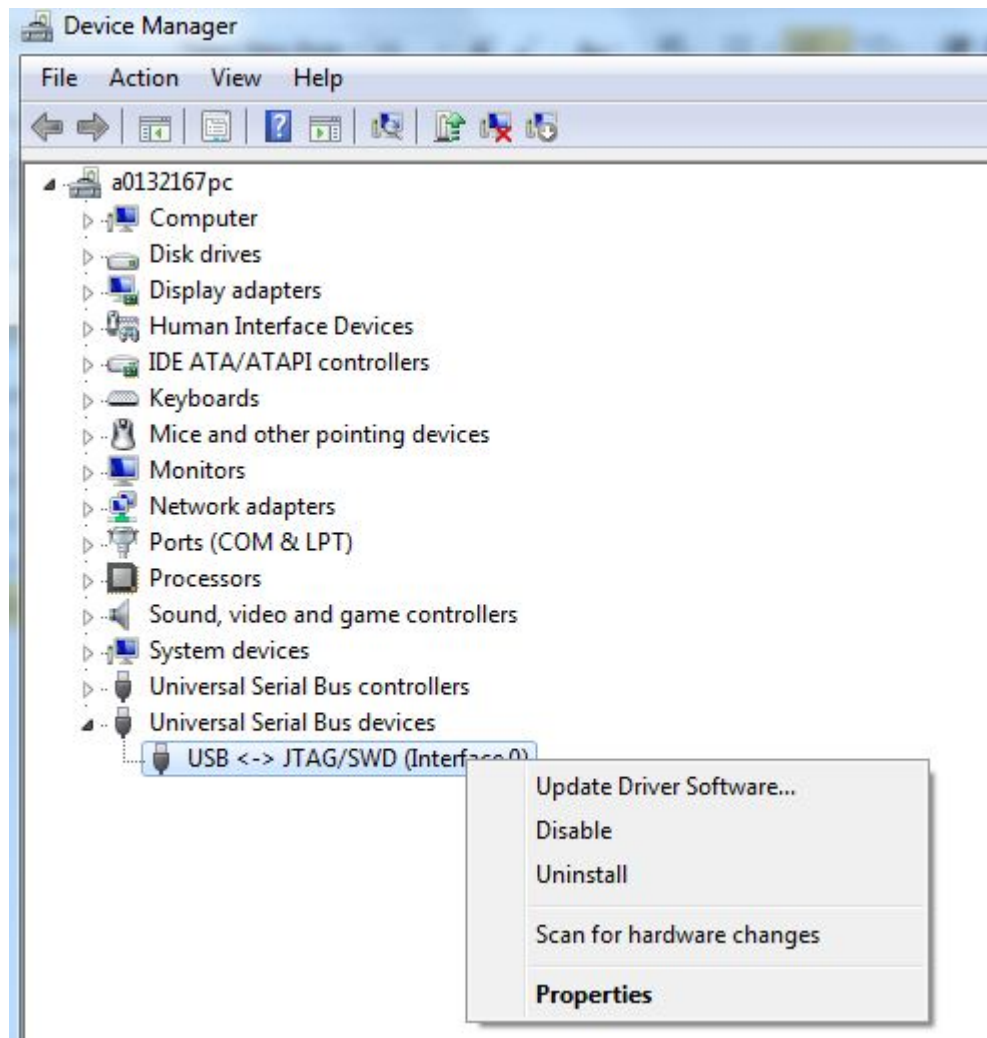

**Figure 33. Device Manager**

## 4 Summary

After the development environment has been set up, refer to the following resources for further assistance in development:

- *CC3200 Programmer's Guide* ([SWRU369](#)) – This guide contains information on how to use the SimpleLink API for writing WLAN-enabled applications.
- [PinMux Tool](#) – This utility helps determine how to best assign peripherals to the appropriate CC3200 package pins.
- [Uniflash](#) – The Uniflash tool manually stores files on the external serial flash. This includes the application binary and SimpleLink firmware patch files. Also, any configuration files, security certificates, web pages, and so forth can be stored using this tool.
- [CC3200 Wiki](#) – All information and tools for the CC3200, including the above, can be found on the CC3200 Wiki page.

## 5 Acronyms Used

STA – Wi-Fi Station

AP – Wi-Fi Access Point

WLAN – Wireless LAN

CCS – Code Composer Studio

GCC – GNU Compiler Collection

## Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

<b>Changes from July 9, 2015 to February 29, 2016 (from C Revision (July 2015) to D Revision)</b>	<b>Page</b>
• Updated for SDK 1.2.0.....	6
• Updated Code Composer Studio from 6.0.1 to 6.1.1. ....	8
• Updated CCS version number from 6.0.1.00040 to 6.1.1.00022. ....	8
• Updated CCS App Center image.....	9
• Updated Select CCS Projects to Import image. ....	11
• Updated Properties for ti_rtos_config image. ....	12
• Updated Tera Term VT image. ....	17
• Updated Tera Term VT image. ....	23
• Updated Open On-Chip Debugger (OpenOCD) section. ....	24
• Updated Compile the GCC SDK Project section. ....	25
• Updated image. ....	27
• Added Driver Reconfiguration section.....	27

## Revision History

<b>Changes from March 4, 2015 to July 8, 2015 (from B Revision (March 2015) to C Revision)</b>	<b>Page</b>
------------------------------------------------------------------------------------------------	-------------

## Revision History

<b>Changes from July 1, 2014 to March 3, 2015 (from A Revision (July 2014) to B Revision)</b>	<b>Page</b>
• Updated for SDK 1.1.0.....	6
• Updated Select CCS Projects to Import image. ....	10
• Updated Debug wlan_station image.....	16

<b>Changes from Original (June 2014) to A Revision</b>	<b>Page</b>
• Added Tera Term download link.....	6
• Updated Jumpers on the CC3200-LAUNCHXL image with SOP-2 Jumper marked. ....	6
• Added Update Service Pack section.....	7
• Updated Option 1: Code Composer Studio (CCS) section. ....	8
• Updated Code Composer Studio v6 Setup image. ....	8
• Replaced main.c with common.h. ....	13
• Changed Editing common.h image.....	13
• Replaced main.c with common.h. ....	20
• Changed Editing common.h image.....	21
• Replaced main.c with common.h. ....	25
• Replaced Editing common.h image. ....	26
• Updated PinMux Tool link.....	29



## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as "components") are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have **not** been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components as meeting ISO/TS16949 requirements, mainly for automotive use. In any case of use of non-designated products, TI will not be responsible for any failure to meet ISO/TS16949.

### Products

Audio	<a href="http://www.ti.com/audio">www.ti.com/audio</a>
Amplifiers	<a href="http://amplifier.ti.com">amplifier.ti.com</a>
Data Converters	<a href="http://dataconverter.ti.com">dataconverter.ti.com</a>
DLP® Products	<a href="http://www.dlp.com">www.dlp.com</a>
DSP	<a href="http://dsp.ti.com">dsp.ti.com</a>
Clocks and Timers	<a href="http://www.ti.com/clocks">www.ti.com/clocks</a>
Interface	<a href="http://interface.ti.com">interface.ti.com</a>
Logic	<a href="http://logic.ti.com">logic.ti.com</a>
Power Mgmt	<a href="http://power.ti.com">power.ti.com</a>
Microcontrollers	<a href="http://microcontroller.ti.com">microcontroller.ti.com</a>
RFID	<a href="http://www.ti-rfid.com">www.ti-rfid.com</a>
OMAP Applications Processors	<a href="http://www.ti.com/omap">www.ti.com/omap</a>
Wireless Connectivity	<a href="http://www.ti.com/wirelessconnectivity">www.ti.com/wirelessconnectivity</a>

### Applications

Automotive and Transportation	<a href="http://www.ti.com/automotive">www.ti.com/automotive</a>
Communications and Telecom	<a href="http://www.ti.com/communications">www.ti.com/communications</a>
Computers and Peripherals	<a href="http://www.ti.com/computers">www.ti.com/computers</a>
Consumer Electronics	<a href="http://www.ti.com/consumer-apps">www.ti.com/consumer-apps</a>
Energy and Lighting	<a href="http://www.ti.com/energy">www.ti.com/energy</a>
Industrial	<a href="http://www.ti.com/industrial">www.ti.com/industrial</a>
Medical	<a href="http://www.ti.com/medical">www.ti.com/medical</a>
Security	<a href="http://www.ti.com/security">www.ti.com/security</a>
Space, Avionics and Defense	<a href="http://www.ti.com/space-avionics-defense">www.ti.com/space-avionics-defense</a>
Video and Imaging	<a href="http://www.ti.com/video">www.ti.com/video</a>

### TI E2E Community

[e2e.ti.com](http://e2e.ti.com)