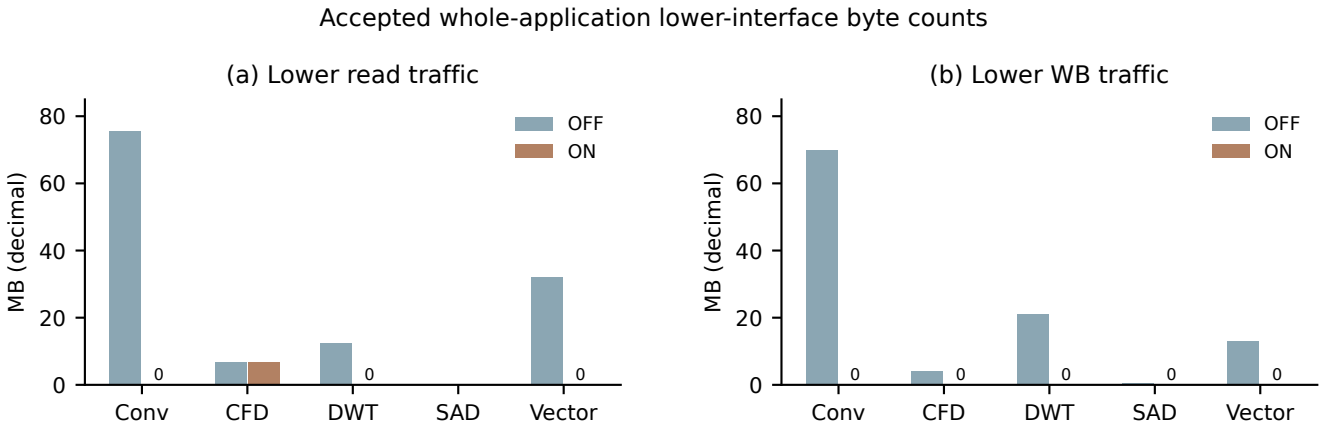
Accepted whole-application lower-interface byte counts
(a) Lower read traffic
(b) Lower WB traffic
MB (decimal)
0
20
40
60
80
OFF
ON
0
Conv
CFD
DWT
SAD
Vector
Issue/service accounting, not DRAM bandwidth or numerical output verification.