ASP-T

Automated Surface Preparation – Tire



ASP-T: Tire Mold Cleaning

DIMENSIONS:
Transport position (LxWxH):
2700 mm x 950 mm x 2300 mm
Stroke: vertical 3000 mm,
horizontal 600 – 2.300 mm
Weight: 2000 kg

POWER REQUIREMENTS
400 V, 32 A, 3 Ph; 3 kW

DRY ICE HOPPER CAPACITY
27 kg, 3 mm pellets supply

HMI DISPLAY
15" Multitouch-Control-Panel

AIR SUPPLY:
Min. 3 m^3/min., min. 6 bar,
ISO8573.1 class 1

IoT CONNECTION:
Remote monitoring and diagnostics
with Cold Jet CONNECT™

EQUIPMENT:
Must be used on flat surface and place suitable for the designed work

WORKFLOW:
Operator transport system in front of the press

Secure and prepare press and connect utilities to the system

Prepositioning of the unit in manual mode

Robot performs cleaning depending on selected recipe, top and bottom sidewall in one process

System stops after cleaning

Remove unit after visual inspection by operator. Report can be saved.
Ready for next cleaning


Automated Surface Preparation – Tire

AERO₂®

PCS®60

PCS = PARTICLE CONTROL SYSTEM



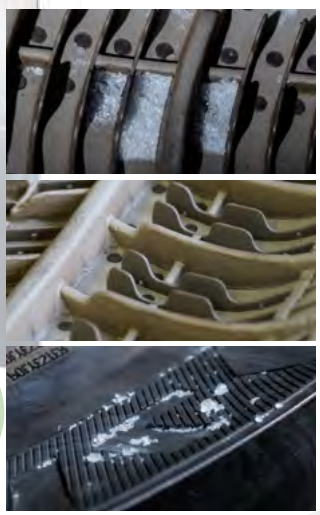



ASP-T Features: Tire Mold Cleaning

1. PCS® 60 dry ice blasting machine

   Unique nozzles designed for the tire industry

   28 different diamond shaped dry ice particle sizes – adjustable according to cleaning parameters

2. One panel control system with open design

   KUKA industrial robot

3. Windows 10 operating system

4. IoT Capability – Cold Jet CONNECT™

5. Safety features: SICK safety modules, blast protection wall, safety area monitoring, emergency stop system

6. General Beckhoff control systems, Stainless steel cover, SEW Eurodrive Motors, Festo pneumatic devices, Auto focus camera

Enhanced Features:

Cleaning in open or closed segment position

Cleaning of 14"–22" mold dimensions

Tilt back press and hydraulic vertical press

Automated self centering with intelligent sensor technology

Single operater

Easy to program

Global presence, reproducible results, cross multi production plants