



Setup

1. Log in to your account.
2. Click "Start Scanning" to scan for nearby devices.
3. In the list, you can choose to filter:
 - Filter on signal strength: Adjust the signal strength (dBm) to limit the search range.
 - Search directly for parts of the device's MAC address shown on the device's label (e.g., B1 or b:1 - at least 2 characters).
4. Click on the device you want to connect to.

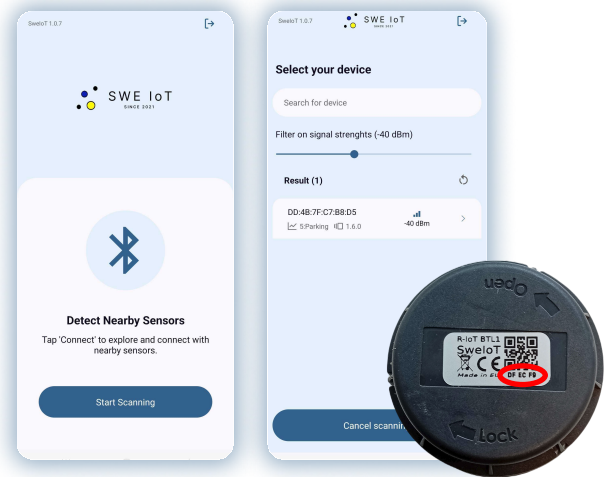

Configuration - When Connected to a Device

1. From Device View (Main screen after connecting with a graph), scroll down until you see the main heading "Device Settings"
2. Select "System"
3. At the top under "Selected Application", choose the application/method for the device and other system settings. Then click "Save".
4. After selecting system settings, click "Config" to configure settings specific to the device's method such as "Measurement Cycles" and other settings. Then click "Save".

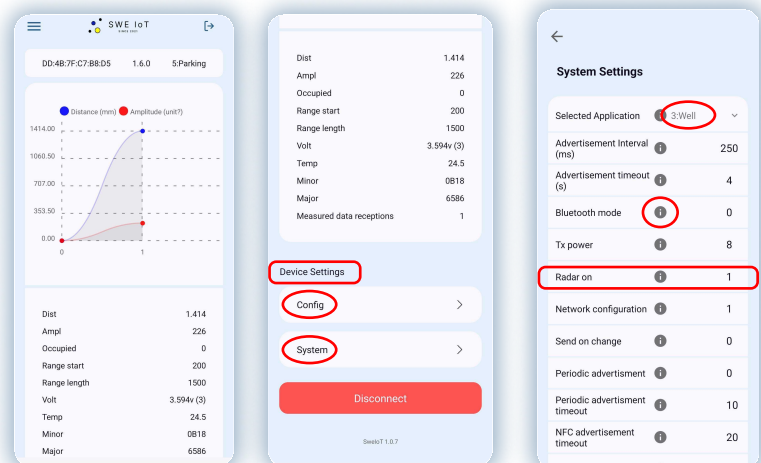

OTA - Update Firmware Version

1. Click on the menu ☰
2. Select "Update Firmware Version"
3. Choose the desired firmware version to start the installation. Once the installation is complete, the device will disconnect. Reconnect to use the new firmware.

