



CONSULT CONNECTOR (looking into connector on vehicle)



If you use a MAX232A then C2 - C5 can be 0.1uF,
if you use a MAX232 then C2 - C5 must be 1.0uF

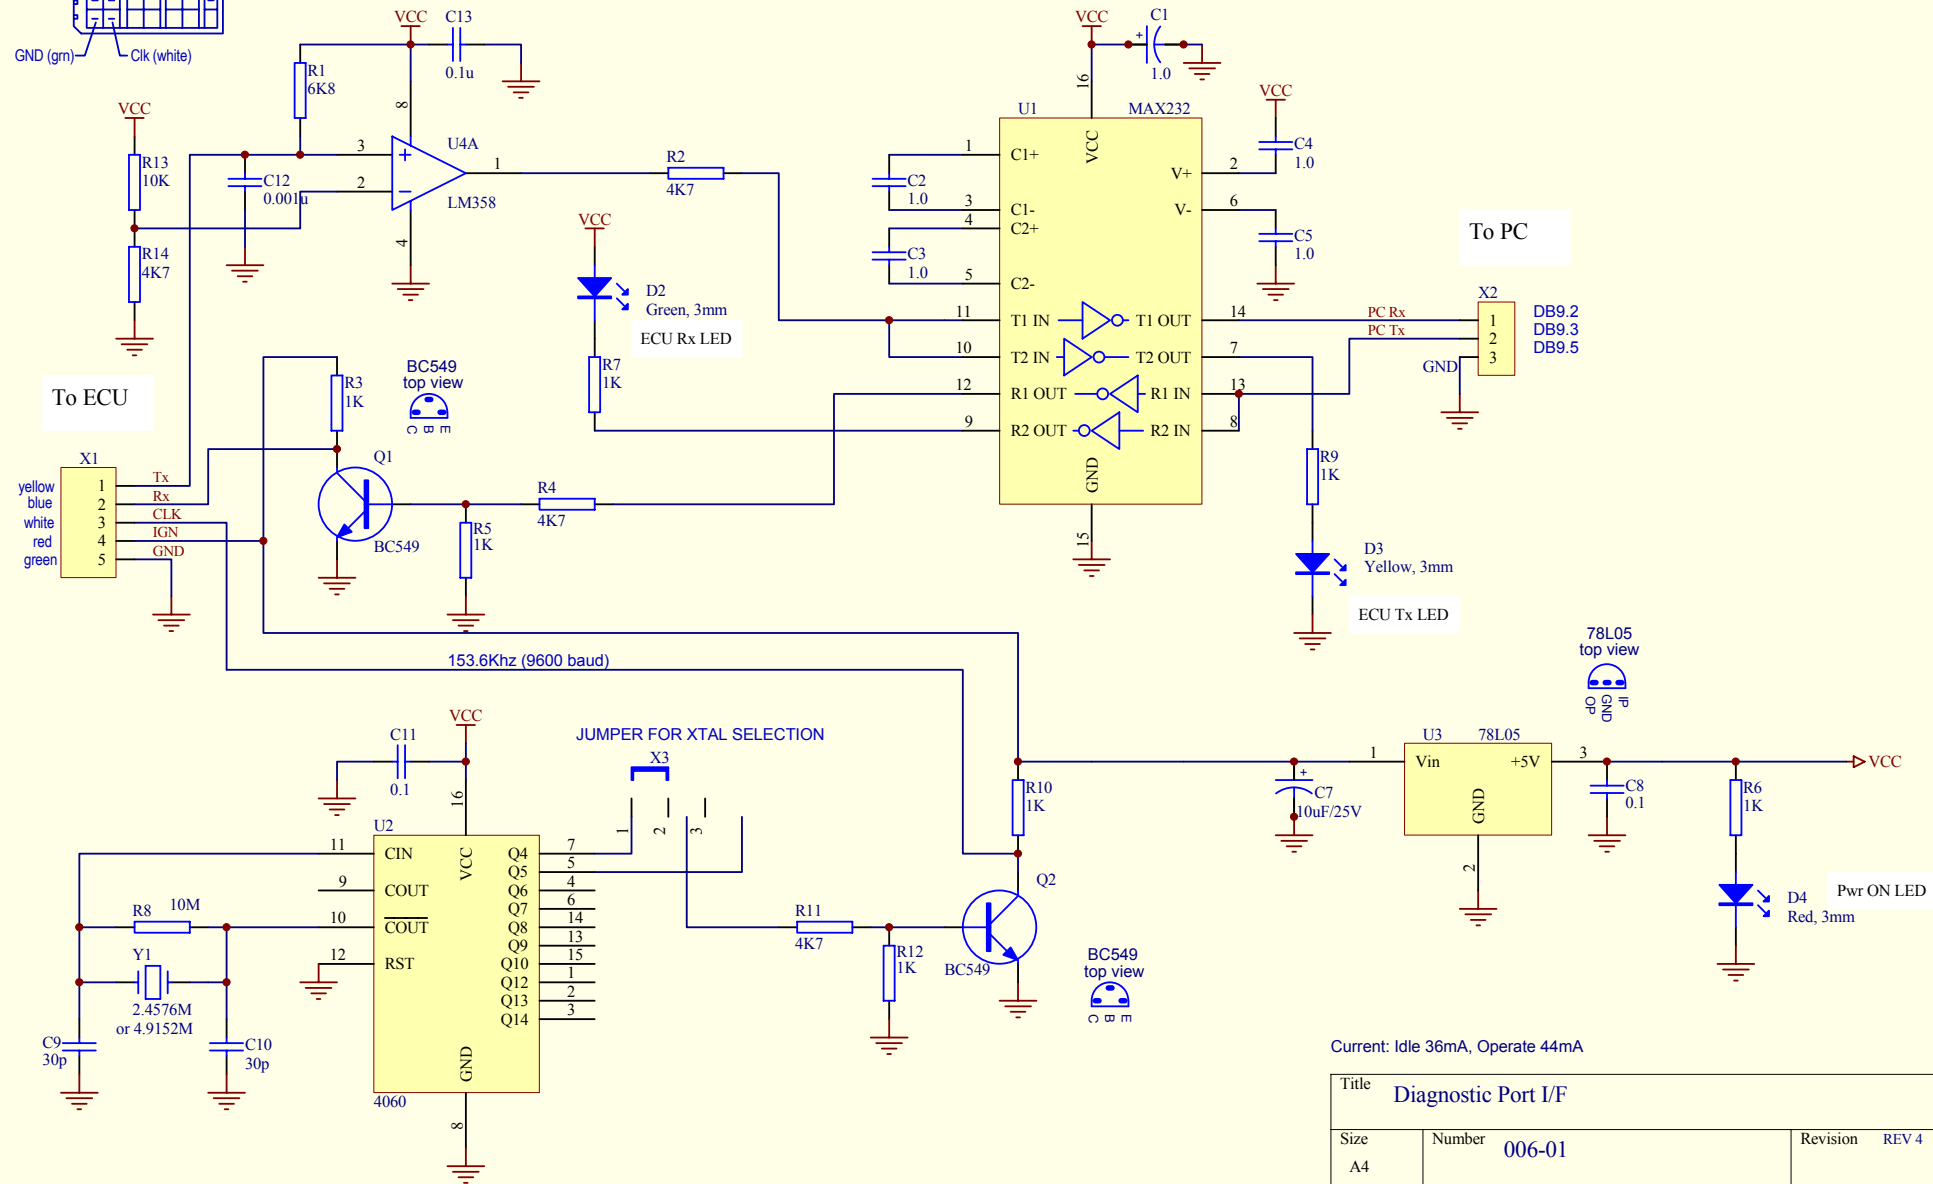

Current: Idle 36mA, Operate 44mA

| | | |
|---------------------------------------|-------------------------|--------------------------|
| Title Diagnostic Port I/F | | |
| Size A4 | Number 006-01 | Revision REV 4 |
| Date: 5-Jul-2005 | Sheet 1 of 1 | |
| File: F:\Projects\...\006-01 4.sch | Drawn By: PL | |