

Name :Swetha.B

Reg no. : 192412215

Course –ECA5601- 5g/6g Communication

Experiment: 12

NB-IoT vs LTE-M Throughput Simulation

Aim

To simulate and compare the performance of NB-IoT and LTE-M communication technologies in terms of Throughput (Mbps), Latency (ms), and Packet Delivery Ratio (%) using MATLAB.

Objectives

1. To evaluate and compare the Throughput (Mbps) performance of NB-IoT and LTE-M under varying network conditions.
2. To analyze the Latency (ms) characteristics of NB-IoT and LTE-M and study their impact on real-time communication.
3. To measure and compare the Packet Delivery Ratio (%) of NB-IoT and LTE-M systems for reliability assessment.


Procedure

1. Define system parameters for NB-IoT and LTE-M such as bandwidth, transmission power, and modulation efficiency.
2. Generate network conditions by varying Signal-to-Noise Ratio (SNR) or channel quality values.
3. Compute Throughput (Mbps) for both NB-IoT and LTE-M using their respective data rate models.
4. Calculate Latency (ms) based on transmission time, scheduling delay, and network load.
5. Determine Packet Delivery Ratio (PDR %) by comparing successfully received packets with transmitted packets.
6. Simulate multiple iterations to observe performance under different channel conditions.
7. Plot comparison graphs for Throughput, Latency, and PDR between NB-IoT and LTE M.
8. Analyze results to identify which technology performs better under different IoT scenarios..

objective 1 :


Program

```
clc;
clear;
close all;
% SNR values (dB)
SNR = 0:5:30;
% Simulated Throughput (Mbps)
NB_IoT = 0.05*(1-exp(-SNR/8));
LTE_M = 1.2*(1-exp(-SNR/8));
disp('SNR (dB)    NB-IoT(Mbps)    LTE-M(Mbps)')
disp([SNR' NB_IoT' LTE_M'])
figure
% ----- Graph 1 -----
subplot(2,1,1)
plot(SNR,NB_IoT,'-o','LineWidth',2)
title('NB-IoT Throughput vs SNR')
xlabel('Signal-to-Noise Ratio (dB)')
ylabel('Throughput (Mbps)')
grid on
% ----- Graph 2 -----
subplot(2,1,2)
plot(SNR,LTE_M,'-s','LineWidth',2)
title('LTE-M Throughput vs SNR')
xlabel('Signal-to-Noise Ratio (dB)')
ylabel('Throughput (Mbps)')
grid on
output
```

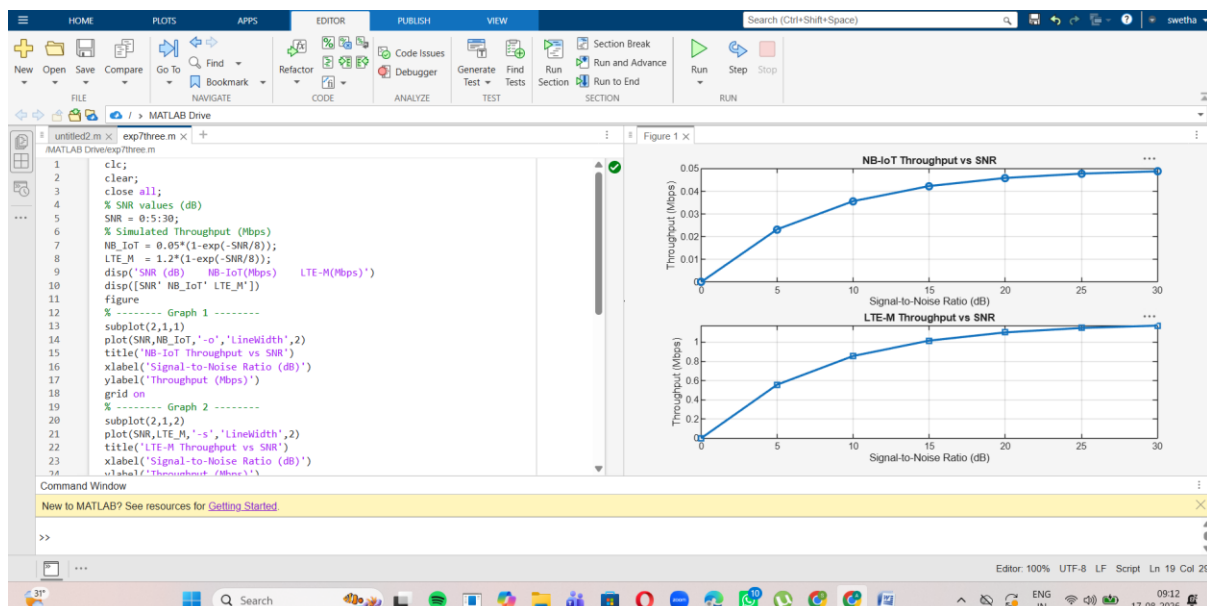


Objective 2: code and output:

```
clc;
clear;
close all;
% SNR values (dB)
SNR = 0:5:30;
% Simulated Latency (ms)
NB_IoT = [180 160 145 130 120 110 100];
LTE_M = [90 80 70 60 50 45 40];
disp('SNR(dB)    NB-IoT Latency(ms)    LTE-M Latency(ms)')
disp([SNR' NB_IoT' LTE_M'])
figure
% ----- Graph 1 -----
subplot(2,1,1)
plot(SNR,NB_IoT,'-o','LineWidth',2)
title('NB-IoT Latency vs SNR')
xlabel('Signal-to-Noise Ratio (dB)')
ylabel('Latency (ms)')
grid on
% ----- Graph 2 -----
subplot(2,1,2)
plot(SNR,LTE_M,'-s','LineWidth',2)
title('LTE-M Latency vs SNR')
xlabel('Signal-to-Noise Ratio (dB)')
ylabel('Latency (ms)')
grid on
```

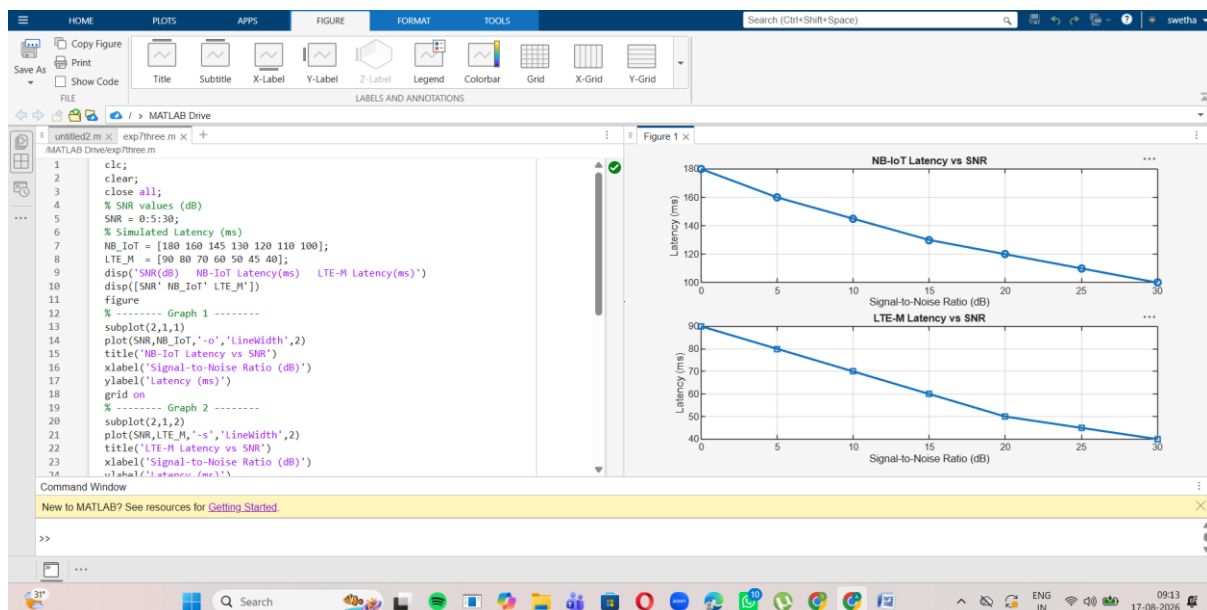

Objective 3:code and output:

```
clc;
clear;
close all;
% SNR values (dB)
SNR = 0:5:30;
% Simulated Packet Delivery Ratio (%)
NB_IoT = [82 86 89 92 95 97 99];
LTE_M = [88 91 94 96 98 99 100];
disp('SNR(dB)    NB-IoT PDR(%)    LTE-M PDR(%)')
disp([SNR' NB_IoT' LTE_M'])
figure
% ----- Graph 1 -----
subplot(2,1,1)
plot(SNR,NB_IoT,'-o','LineWidth',2)
title('NB-IoT Packet Delivery Ratio vs SNR')
xlabel('Signal-to-Noise Ratio (dB)')
ylabel('Packet Delivery Ratio (%)')
grid on
% ----- Graph 2 -----
subplot(2,1,2)
plot(SNR,LTE_M,'-s','LineWidth',2)
title('LTE-M Packet Delivery Ratio vs SNR')
xlabel('Signal-to-Noise Ratio (dB)')
ylabel('Packet Delivery Ratio (%)')
grid on
```

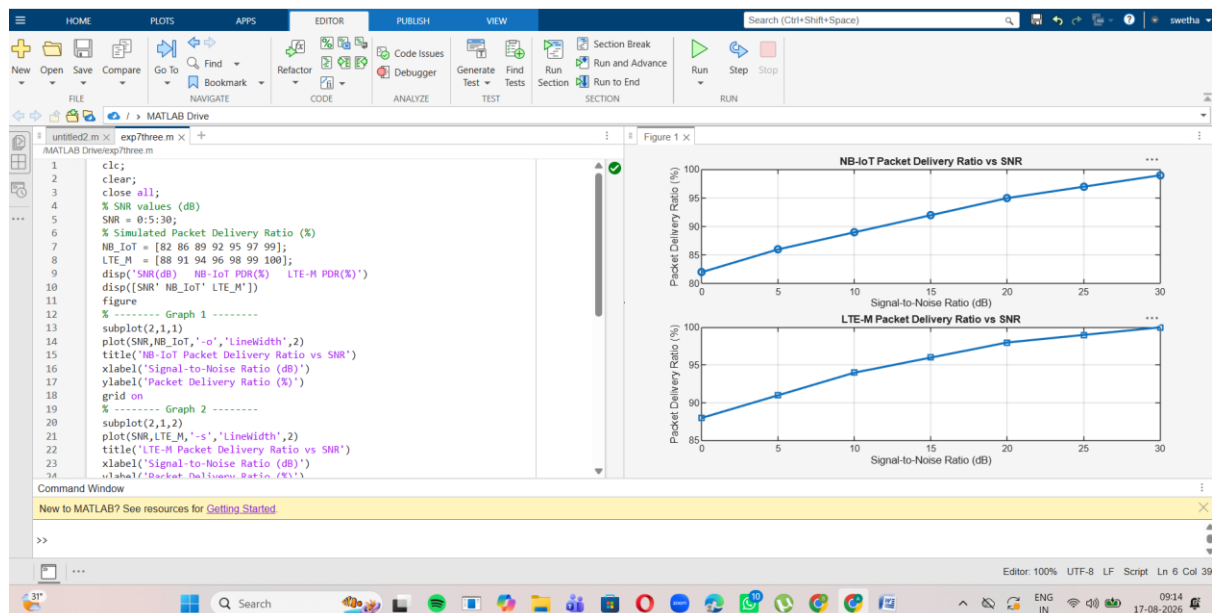

Result:

1. The throughput performance of both NB-IoT and LTE-M was successfully simulated, and LTE-M achieved higher throughput than NB-IoT under the same network conditions.
2. The latency analysis showed that LTE-M provides lower communication delay compared to NB-IoT, making it more suitable for real-time IoT applications.
3. The Packet Delivery Ratio (PDR) of both technologies improved with increasing SNR, with LTE-M demonstrating slightly higher reliability than NB-IoT during data transmission.