



# INTREPID INDUSTRIES I

2305 S. Battleground Road  
La Porte, TX 77571-9475

T: 281.479.8301  
F: 281.479.3453



sales@intrepidinc  
www.intrepidind

## SAFETY GATE DIMENSIONS


### TYPICAL INSTALLATION OF UDG-37 Universal Double Bar Safety Gate

RIGHT HAND SWING INSTALLATION on Angle Iron Guardrail

NOTE: Only one Hinge and one Block are required for the UDG Gate

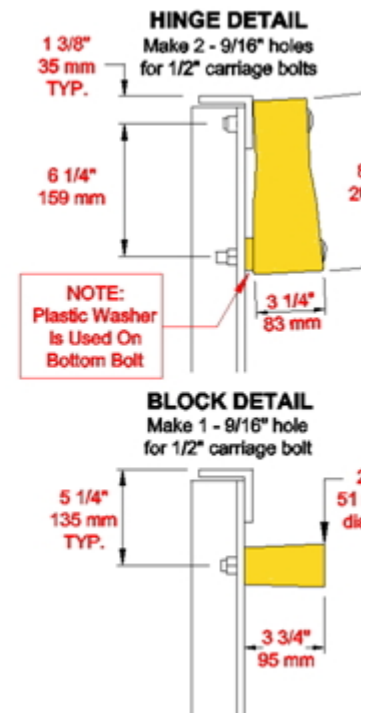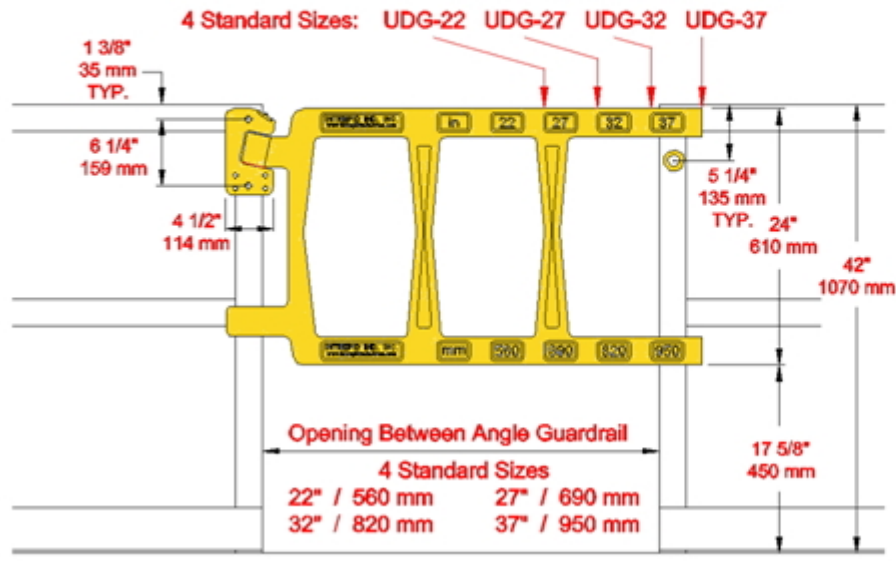


## INTREPID UDG-37 MAXIMUM SWING ROTATION, RISE, AND KICK

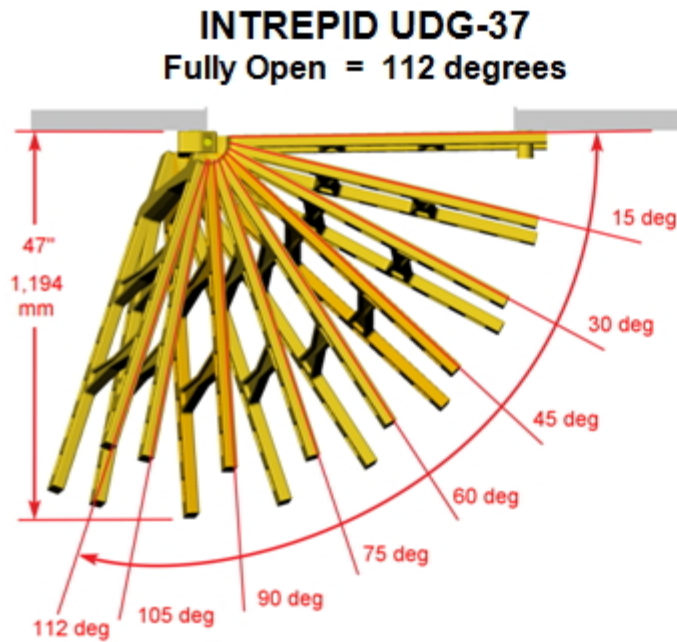

Please allow as much room as possible so that the gate can swing fully open. However if space is tight, then try to provide at least a 4" – 6" corner so that the gate can swing open as much as 75° – 90°.

### DESIGN CONSIDERATION: WHEN GATE IS IN A TIGHT AREA

When the Safety Gate is to be mounted in a tight space, such as a corner or a narrow catwalk, designer must be aware of both the rise and kick out caused by the swing rotation of the self-closing gate. This is depicted in these two drawings.

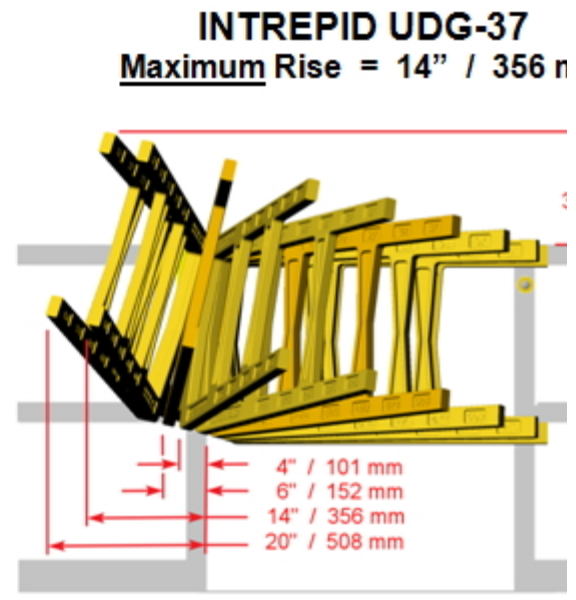

*Technical Modifications Reserved Without Prior Notice.*

**Links to:** [Home](#) | [Order Form](#) | [Downloads](#) | [Safety Gates](#) | [GPC's](#) | [CableSafe Safety Hooks](#) | [Insulators](#) | [Custom](#)