



Department of Electrical Engineering

IIT BOMBAY

DUAL DEGREE PROJECT

---

# Experimental implementation of a cognitive Base Transceiver Station using OpenBTS and spectrum sensing techniques

---

*Author:*

Swrangsar BASUMATARY

*Supervisor:*

Prof. S N MERCHANT

May 27, 2014



# Abstract

Our goal is to set up a software defined cognitive radio using OpenBTS, GNU Radio and USRP kits. We decide on a frequency channel, to run our cognitive OpenBTS system in, beforehand. First we sense the presence of ongoing calls made by the primary users in the predefined frequency channel. The sensing is done by calculating the energy in that channel using a technique of energy detection called periodogram analysis. If the energy is above some predefined threshold then there are ongoing calls in that channel and hence we wait for the calls to end. As soon as the calls involving the primary users end the energy in that channel goes low. GNU Radio detects this change and it provides the ARFCN, corresponding to this channel, to the secondary BTS system and the secondary BTS starts using this ARFCN allowing secondary users to make calls and send SMSs.



# Contents

<b>1</b>	<b>Introduction</b>	<b>1</b>
1.1	Background . . . . .	1
1.2	Cognitive Radio . . . . .	2
1.3	Organization . . . . .	2
<b>2</b>	<b>GSM</b>	<b>3</b>
2.1	Overview . . . . .	3
2.2	System Architecture . . . . .	3
2.2.1	Base Station Subsystem (BSS) . . . . .	3
2.2.2	Network and Switching Subsystem (NSS) . . . . .	4
2.2.3	The Operation Subsystem (OSS) . . . . .	7
2.2.4	GSM Network Areas . . . . .	7
2.3	Protocol Architecture . . . . .	8
2.3.1	Signalling Transmission . . . . .	8
<b>3</b>	<b>OpenBTS</b>	<b>13</b>
3.1	The OpenBTS Application Suite . . . . .	13
3.2	Key applications . . . . .	14
3.2.1	OpenBTS . . . . .	14
3.2.2	Transceiver . . . . .	14
3.2.3	SMQueue . . . . .	14
3.2.4	SIP router/PBX . . . . .	15
3.2.5	SIPAuthServe . . . . .	15
3.3	Network organization . . . . .	15



# List of Figures

2.1	GSM PLMN architecture . . . . .	4
2.2	Network architecture for a single MSC Service Area . . . . .	5
2.3	GSM network components . . . . .	6
2.4	MSC/VLR Service Area . . . . .	6
2.5	A PLMN Service Area for a GSM operator . . . . .	8
2.6	GSM protocol architecture planes . . . . .	9
2.7	Logical channels for user plane data and control plane signalling . . . . .	9
3.1	Simplest OpenBTS network . . . . .	16
3.2	OpenBTS network with two access points . . . . .	17





# Chapter 1

## Introduction

### 1.1 Background

The electromagnetic radio spectrum is a natural resource that remains underutilized [4]. It is licensed by governments for use by transmitters and receivers. With the explosive proliferation of cell phones and other wireless communication devices, we cannot afford to waste our spectral resources anymore.

In November 2002, the Spectrum Policy Task Force, a group under the Federal Communications Commission(FCC) in the United States, published a report saying [1],

“In many bands, spectrum access is a more significant problem than physical scarcity of spectrum, in large part due to legacy command-and-control regulation that limits the ability of potential spectrum users to obtain such access.”

If we were to scan the radio spectrum even in metropolitan places where it’s heavily used, we would find that [6]:

1. some frequency bands are unoccupied most of the time,
2. some are only partially occupied and
3. the rest are heavily used.

The underutilization of spectral resources leads us to think in terms of *spectrum holes*, which are defined as [3]:

*A spectrum hole is a band of frequencies assigned to a primary user, but, at a particular time and specific geographic location, the band is not being utilized by that user.*

The spectrum can be better utilized by enabling secondary users (users who are not licensed to use the services) to access spectrum holes unoccupied by primary users at the location and the time in question. *Cognitive Radio*, which includes software-defined radio, has been promoted as the means to make efficient use of the spectrum by exploiting the existence of spectrum holes [4][2][5].

## 1.2 Cognitive Radio

One of the definitions of Cognitive Radio is [4]:

*Cognitive radio is an intelligent wireless communication system that is aware of its surrounding environment (i.e., outside world), and uses the methodology of understanding-by-building to learn from the environment and adapt its internal states to statistical variations in the incoming RF stimuli by making corresponding changes in certain operating parameters (e.g., transmit-power, carrier-frequency, and modulation strategy) in real-time, with two primary objectives in mind:*

- *highly reliable communications whenever and wherever needed;*
- *efficient utilization of the radio spectrum.*

Besides, a cognitive radio is also reconfigurable. This property of cognitive radio is provided by a platform known as *software-defined radio*. Software-defined Radio (SDR) is basically a combination of two key technologies: digital radio, and computer software.

## 1.3 Organization

The rest of this document is organized as follows. Chapter 2 briefly describes the GSM architecture and its Um interface. Chapter 3 gives a literature survey on Universal Software Radio Peripheral (USRP N210). Chapter 4 and 5 describe the literature survey done on the GNU Radio software package and OpenBTS software respectively. Chapter 6 covers a partial implementation of cognitive radio using GNU Radio and OpenBTS. It also describes the proposed future work along with a flowgraph describing the algorithm for the complete implementation of cognitive radio on the OpenBTS platform.

# Chapter 2

## GSM

### 2.1 Overview

GSM (Global System for Mobile Communications, originally Groupe Spécial Mobile), is a very popular standard that describes protocols for second generation (2G) digital cellular networks used by mobile phones. GSM networks usually operate in the 900 MHz, 1800 MHz or 1900 MHz bands. It supports a full data rate of 9.6 kbits/sec or 14.4 kbits/sec using better codecs.

### 2.2 System Architecture

A GSM Public Land Mobile Network (PLMN) consists of at least one Service Area managed by a Mobile Switching Center (MSC) connected to the Public Switched Telephone Network (PSTN).

The network structure can be divided into the following discrete sections:

- Base Station Subsystem
- Network and Switching Subsystem
- Operation Subsystem

#### 2.2.1 Base Station Subsystem (BSS)

A base station subsystem consists of

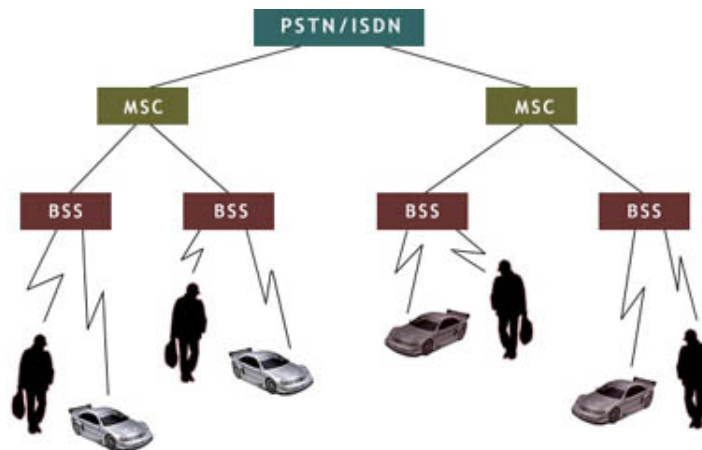


Figure 2.1: The architecture of a GSM Public Land Mobile Network (PLMN).

Source: [http://wireless.arcada.fi/MOBWI/material/CN\\_1\\_2.html](http://wireless.arcada.fi/MOBWI/material/CN_1_2.html)

- a Base Station Controller (BSC) and
- at least one Base Transceiver Station (BTS) for Mobile Stations (MS). A mobile station can be a cell phone, or any electronic equipment such as a Personal Digital Assistant (PDA) with a phone interface.

The area served by a single BTS is considered a Network Cell. One or more BTSs are managed by a single BSC. A group of BSSs can be managed as a Location Area (Location Area) provided all those BSSs are being managed by the same MSC.

An MSC may also be connected via a Gateway MSC (GMSC) to other MSCs or the Public Switched Telephone Network (PSTN) with the Integrated Services Digital Network (ISDN) option. The Inter-Working Function (IWF) of a GMSC makes it possible to connect the circuit switched data paths of a GSM network with the PSTN/ISDN.

## 2.2.2 Network and Switching Subsystem (NSS)

The NSS is made up of an MSC and a Visitor Location Register (VLR). An MSC

- sets up, controls and shuts down connections
- handles call charges
- manages additional services like call forwarding, call blocking, etc.

A VLR contains all the subscriber data of the phones being served by the accompanying MSC. It contains their location data too. The VLR also maintains data about the SIMs that do not belong to the network but have roamed into the network. The area served by an MSC is called a MSC/VLR service area.


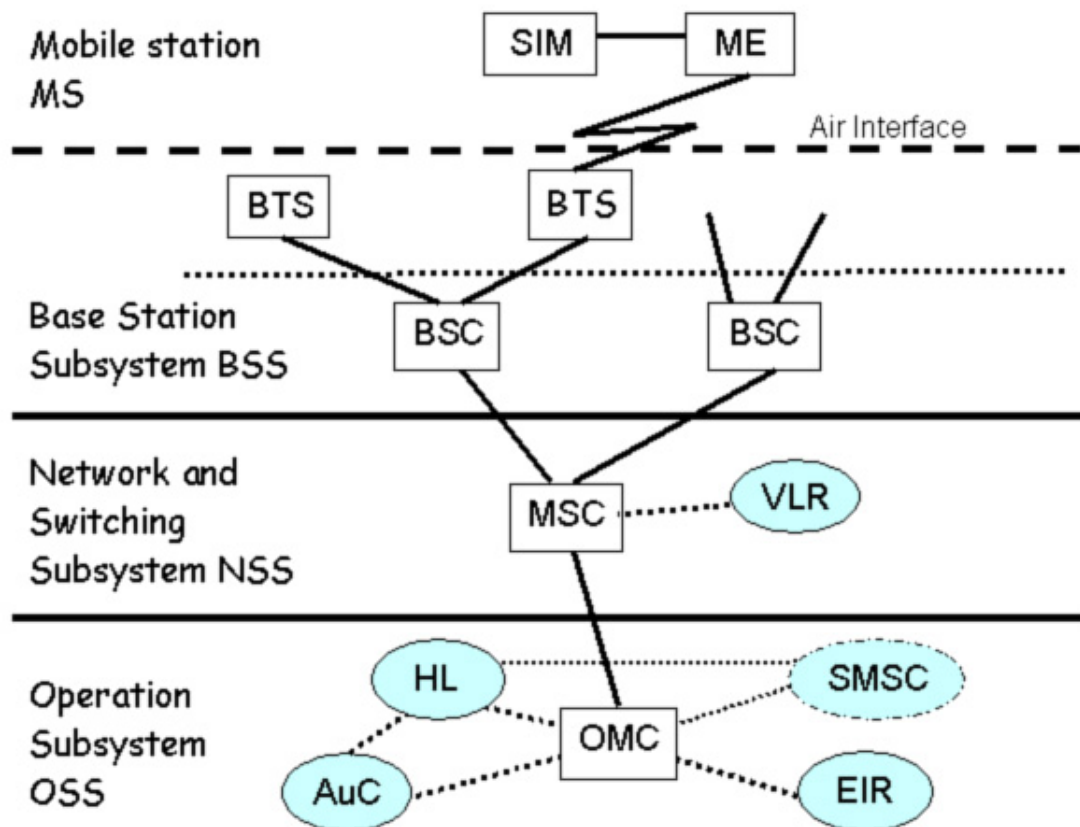


Figure 2.2: The GSM network architecture for a single MSC controlled Service Area.  
Source: [http://wireless.arcada.fi/MOBWI/material/CN\\_1\\_2.html](http://wireless.arcada.fi/MOBWI/material/CN_1_2.html)

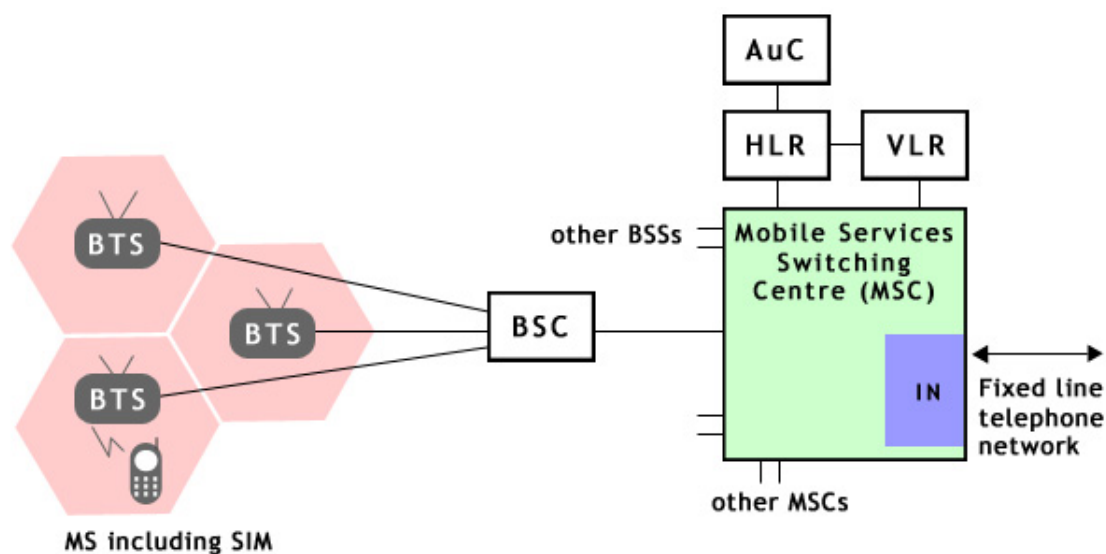

*Mobile Station = MS*  
*Subscriber Identity Module = SIM*  
*Base Transceiver Station = BTS*  
*Base Station Controller = BSC*  
*HLR = Home Location Register*  
*VLR = Visited Location Register*  
*AuC = Authentication Centre*  
*IN = Interrogating Node*

Figure 2.3: GSM network components.

Source: [http://wireless.arcada.fi/MOBWI/material/CN\\_1\\_2.html](http://wireless.arcada.fi/MOBWI/material/CN_1_2.html)

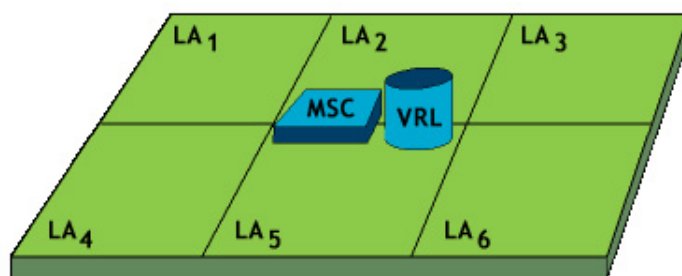


Figure 2.4: MSC/VLR Service Area.

Source: [http://wireless.arcada.fi/MOBWI/material/CN\\_1\\_2.html](http://wireless.arcada.fi/MOBWI/material/CN_1_2.html)

### **2.2.3 The Operation Subsystem (OSS)**

The OSS consists of :

- the Operation and Maintenance Center (OMC)
- the Authentication Center (AuC)
- the Home Location Register (HLR)
- the Equipment Identity Register (EIR)

The OSS is responsible for

- network management functions like service provisioning, network configuration, fault management, etc.
- billing calls
- administering subscribers

The AuC controls all the encryption algorithms used for verifying the SIMs. The EIR contains the serial numbers of all the MSs (mobile phones) being served. The HLR contains the subscriber data and location data of all the SIMs in different parts of the network.

### **2.2.4 GSM Network Areas**

The area covered by a GSM operator is called a PLMN Service Area. A PLMN service area is made up of several MSC/VLR service areas. The hierarchy of service areas is as follows:

- PLMN service area,
- MSC/VLR service area,
- Location Area and
- Network Cell

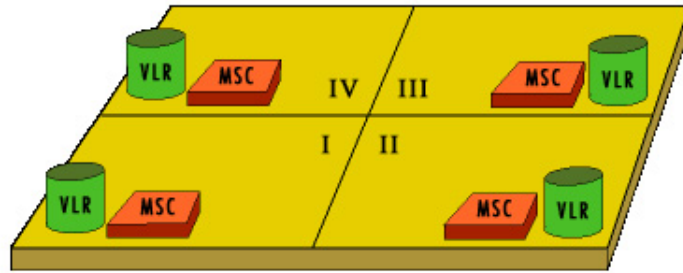


Figure 2.5: A PLMN Service Area for a GSM operator.  
Source: [http://wireless.arcada.fi/MOBWI/material/CN\\_1\\_2.html](http://wireless.arcada.fi/MOBWI/material/CN_1_2.html)

## 2.3 Protocol Architecture

The data communication protocols in a GSM network are implemented to work over the bearer<sup>1</sup> data channel. The GSM protocol architecture is structured into three independent planes:

- user plane
- control plane
- management plane

The user plane defines protocols for handling the voice and user data. At the Um interface, the traffic control channel (TCH) is used to carry the user data.

The control plane defines protocols for controlling connections by using signalling data. The signalling data are carried over logical channels called Dm-channels (wireless analog of the D-channels for wired interface). The spare capacities of the Dm-channels are used for carrying user data. Eventually all logical channels have to multiplexed onto the physical channel.

The management plane takes care of the coordination between different planes. It also manages functions related to the control and/or user planes. The management plane handles things like network configuration, network fault, etc.

### 2.3.1 Signalling Transmission

In GSM, the network nodes exchange signaling information with each other to establish, control and terminate connections. The various interfaces in a GSM network are:

<sup>1</sup>A bearer data channel is a channel that carries call content i.e. one that does not carry signaling.



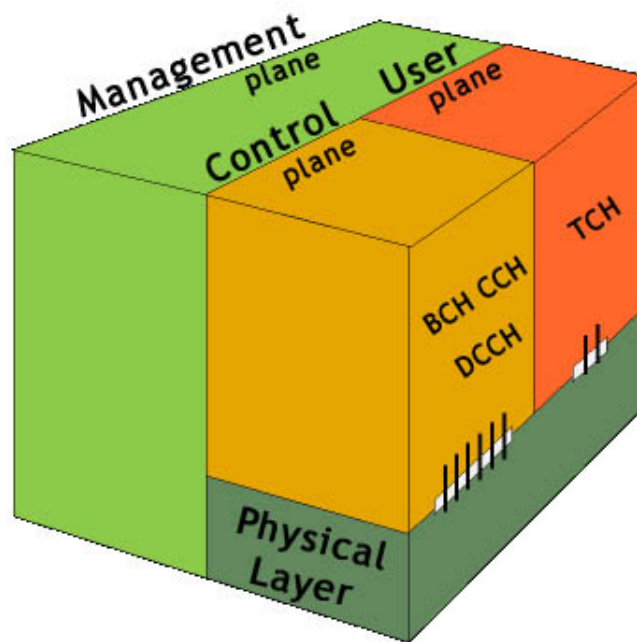


Figure 2.6: GSM protocol architecture planes.  
 Source: [http://wireless.arcada.fi/MOBWI/material/CN\\_1\\_3.html](http://wireless.arcada.fi/MOBWI/material/CN_1_3.html)

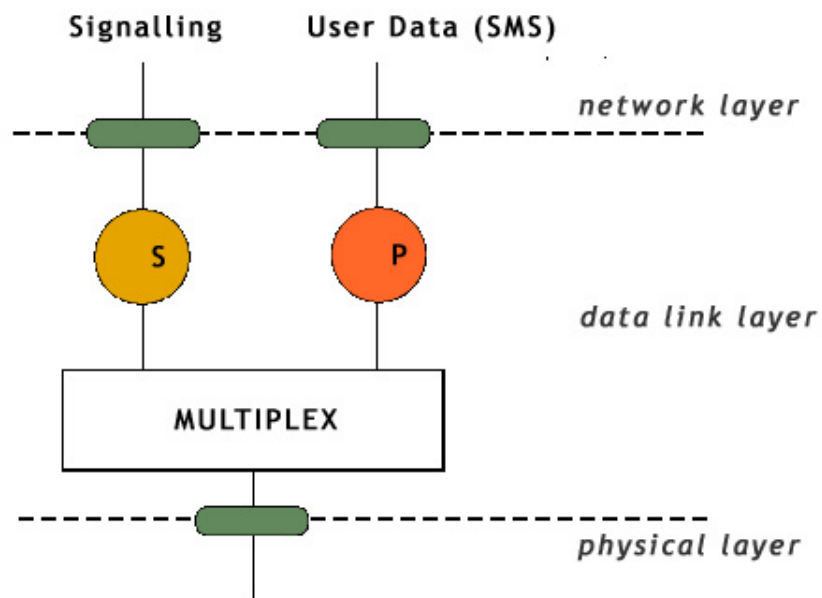


Figure 2.7: Logical channels for user plane data and control plane signalling.  
 Source: [http://wireless.arcada.fi/MOBWI/material/CN\\_1\\_3.html](http://wireless.arcada.fi/MOBWI/material/CN_1_3.html)

- MS-BTS: Um
- BTS-BSC: Abis
- BSC-MSC: A
- MSC-VLR: B
- MSC-HLR: C
- VLR-HLR: D
- MSC-MSC: E
- MSC-EIR: F
- VLR-VLR: G

The Um interface is the only interface that uses the wireless physical medium for carrying signals. The rest of the interfaces all use wired and digital mediums.

## DATA LINK LAYER (LAYER 2) PROTOCOLS

**Link Access Protocol on Dm-channel (LAPDm)** is a layer 2 protocol that provides safe, reliable connections to layer 3 protocols. It is a wireless-adapted version of the standard Link Access Protocol on D-channel (LAPD) of ISDN. It works in two modes: Unacknowledged and Acknowledged. In Unacknowledged mode it operates without acknowledgement, without error correction and without flow control. While in acknowledged mode, it asserts acknowledgement, error correction is done by resending and flow is controlled.

**Message Transfer Part (MTP)** is the standard ISDN message transport part of Signaling System 7 (SS7). The networking layers covered by MTP cannot be mapped one-to-one to the OSI model<sup>2</sup>. But it covers layer 1, layer 2 and parts of layer 3 from the OSI model. The parts of layer 3 not covered by MTP are covered by Signalling Connection Control Part (SCCP).

## NETWORK LAYER (LAYER 3) PROTOCOLS

**Radio Resource Management (RR)** is a protocol that sets up, manages and terminates radio link channels. It is involved in measuring radio field strength, signal quality etc. It manages handover, modulation scheme, co-channel interference, etc. The goal is to utilize the limited spectral resources efficiently.

---

<sup>2</sup>Operation Systems Interconnection model

**Mobility Management (MM)** manages mobility of the mobile stations (MS). This protocol is used by the MS to communicate directly with the MSC bypassing the BSS. It works over an already established RR connection. It handles stuff like TMSI re-allocation, authentication, IMSI attach/detach, roaming, location update procedure, etc.

**Call Management (CM)** protocol consists of the following parts:

**Call Control (CC)** sets up, manages and ends calls. For each call a CC instance is created in the MS and another one in the MSC. CC instances communicate over already established MM and RR connections.

**Short Message Service (SMS)** works over already established MM, RR and LAPDm connections.

**Supplementary Services (SS)** provide upper layers the access to GSM supplementary services like call forwarding, call barring, etc.

**Signal Connection Control Part (SCCP)** is a SS7 protocol that provides routing, flow control, connection-orientation, error correction facilities etc. It works at the A-interface.

**Base Station System Application Part (BSSAP)** is a signaling protocol at the A interface supported by MTP and SCCP.

**Direct Transfer Application Part (DTAP)** handles signaling between the MS and the MSC.

**Base Station System Management Application Part (BSSMAP)** transfers management information from the BSC to the MSC.

**Base Station System Operation and Management Application Part (BSSOMAP)** transports network management information from OMC to BSC.

**Mobile Application Part (MAP)** is an SS7 application-layer protocol for the various nodes in a GSM network. It provides facilities such as:

- roaming support via location update, IMSI attach/detach, authentication
- call handling
- subscriber tracing
- SMS
- supplementary services



# Chapter 3

## OpenBTS

OpenBTS is a Unix application that uses a software radio to present a GSM Um interface to handsets and uses a SIP softswitch or PBX to connect calls. The combination of the global-standard GSM air interface with low cost VoIP backhaul forms the basis of a new type of cellular network that can be deployed and operated at a much lower cost than existing technologies in many applications, especially rural cellular deployments and private cellular networks in remote areas.

### 3.1 The OpenBTS Application Suite

A complete OpenBTS installation consists of many distinct applications:

**OpenBTS** The actual OpenBTS application, containing most of the GSM stack above the radio modem.

**Transceiver** The software radio modem and hardware control interface.

**SMQueue** A store-and-forward server for text messaging.

**Asterisk** A VoIP PBX or “softswitch”.

**SIPAuthServe** An application managing the database of subscriber information.

**Other Services** Optional services supported through external servers, interfaced to OpenBTS through various protocols.

## 3.2 Key applications

### 3.2.1 OpenBTS

The OpenBTS application contains:

- L1 TDM functions (GSM 05.02)
- L1 FEC functions (GSM 05.03)
- L1 closed loop power and timing controls (GSM 05.08 and 05.10)
- L2 LAPDm (GSM 04.06)
- L3 radio resource management functions (GSM 04.08)
- L3 GSM-SIP gateway for mobility management
- L3 GSM-SIP gateway for call control
- L4 GSM-SIP gateway for text messaging

The general design approach of OpenBTS is not to implement any function above L3 or L4, so at L3 or L4 every subprotocol of GSM is either terminated locally or translated through a gateway to some other protocol for handling by an external application. Similarly, OpenBTS itself does not contain any speech transcoding functions above the L1 FEC parts.

### 3.2.2 Transceiver

The transceiver application performs the radiomodem functions of GSM 05.05 and manages the Gigabit Ethernet interface (USB2 interface, in case of USRP1 or older models) to the radio hardware.

### 3.2.3 SMQueue

SMQueue is an RFC-3428 store-and-forward server that is used for text messaging in the OpenBTS system. SMQueue is required to send a text message from one MS to another, or to provide reliable delivery of text messages to an MS from any source.

### 3.2.4 SIP router/PBX

OpenBTS uses a SIP router or PBX to perform the call control functions that are normally performed by the MSC in a conventional GSM network, although in most network configurations this switching function is distributed over multiple switches. These switches also provide transcoding services.

The SIP router used in OpenBTS is Asterisk by default. Though there are other PBXs available in the market like Yate, FreeSwitch, etc.

### 3.2.5 SIPAuthServe

An application that implements Subscriber Registry, the database of subscriber information that replaces both the Asterisk SIP registry and the GSM Home Location Register (HLR) found in a conventional GSM network.

## 3.3 Network organization

In the simplest network, with just a single access point, all the applications run on the same embedded computer as shown in figure 3.1.

In larger network, with more than one access points, one of them can behave as a master and provide servers to the rest of them. Figure 3.2 shows a network with two access points where a master access point is providing servers to the other one.

The Transceiver applications and the OpenBTS must run in each GSM/SIP access point. The Asterisk and the Subscriber Registry applications (SIPAuthServe) communicate via the filesystem, so they must run in the same computer, but that computer can be remote to the access point. SMQueue and other servers can run in any access point and can have multiple instances.

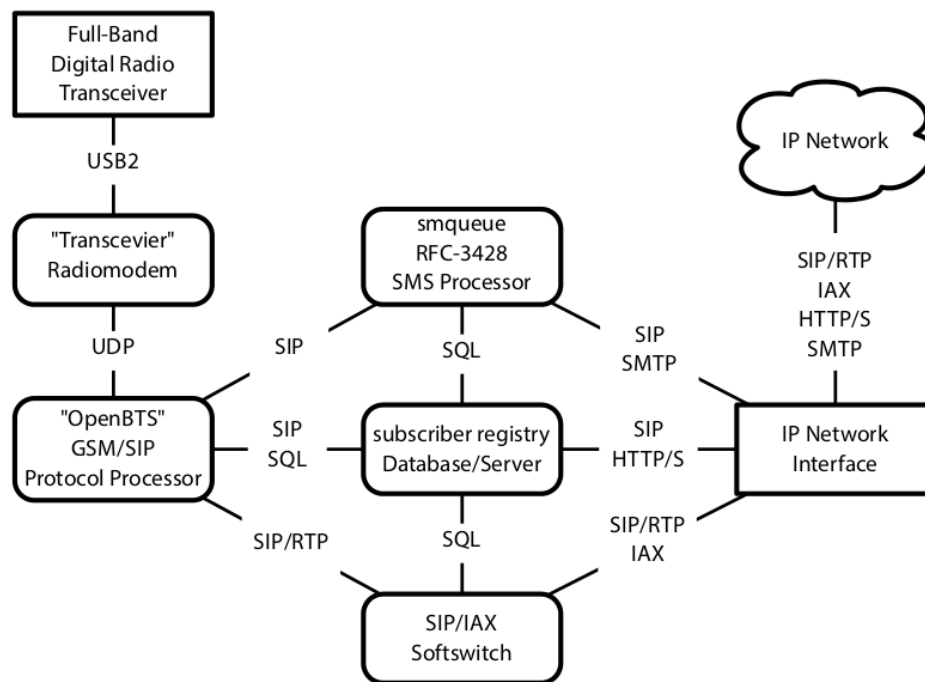


Figure 3.1: Components of the OpenBTS application suite and their communication channels as installed in each access point. Sharp-cornered boxes are hardware components. Round-cornered boxes are software components.

Source: <https://wush.net/trac/rangepublic/attachment/wiki/WikiStart/OpenBTS-4.0-Manual.pdf> [Accessed on May 27, 2014]



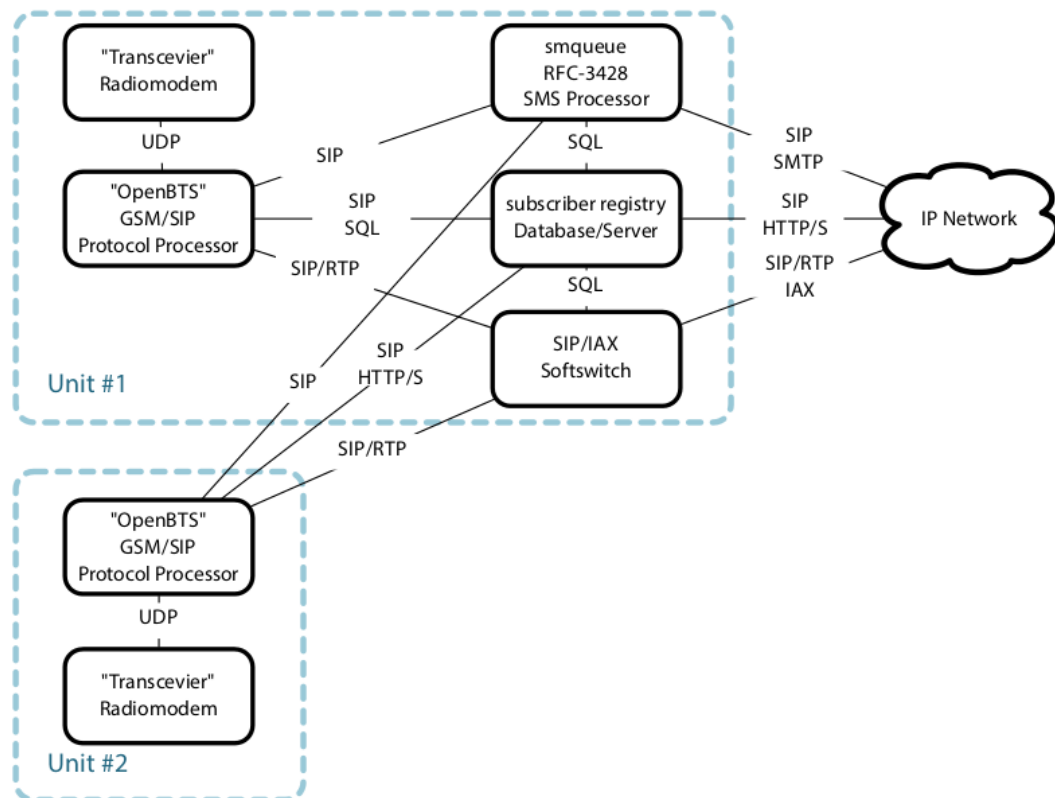


Figure 3.2: Two access points with unit #1 providing servers for both.

Source: <https://wush.net/trac/rangepublic/attachment/wiki/WikiStart/OpenBTS-4.0-Manual.pdf>  
 [Accessed on May 27, 2014]



# Bibliography

- [1] Federal Communications Commission. Spectrum policy task force. *ET Docket No. 02-135*, November 2002.
- [2] Joseph Mitola et al. Cognitive radio: Making software radios more personal. *IEEE Personal Communications*, 6(4):13–18, August 1999.
- [3] Paul Kolodzy et al. Next generation communications: Kickoff meeting. In *Proc. DARPA*, October 2001.
- [4] Simon Haykin. Cognitive radio: Brain-empowered wireless communications. *IEEE Journal on selected areas in communications*, 23(2), 2005.
- [5] Joseph Mitola. *Cognitive Radio: An Integrated Agent Architecture for Software Defined Radio*. PhD thesis, Royal Institute of Technology (KTH), Stockholm, Sweden, May 2000.
- [6] Gregory Staple and Kevin Werbach. The end of spectrum scarcity. *IEEE Spectrum*, 41(3):48–52, March 2004.