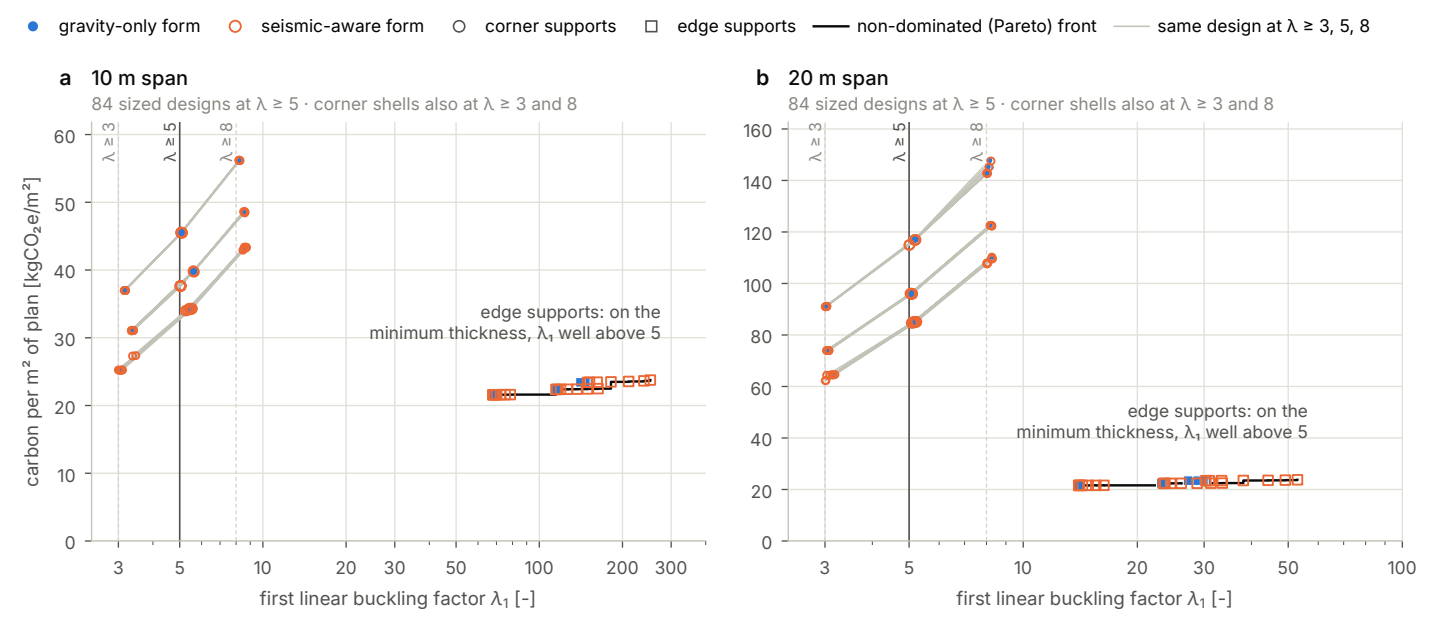

gravity-only form
seismic-aware form
corner supports
edge supports
non-dominated (Pareto) front
same design at λ ≥ 3, 5, 8
a 10 m span
84 sized designs at λ ≥ 5 · corner shells also at λ ≥ 3 and 8
λ ≥ 3
λ ≥ 5
λ ≥ 8
edge supports: on the minimum thickness, λ1 well above 5
carbon per m² of plan [kgCO2e/m²]
first linear buckling factor λ1 [-]
b 20 m span
84 sized designs at λ ≥ 5 · corner shells also at λ ≥ 3 and 8
λ ≥ 3
λ ≥ 5
λ ≥ 8
edge supports: on the minimum thickness, λ1 well above 5
first linear buckling factor λ1 [-]