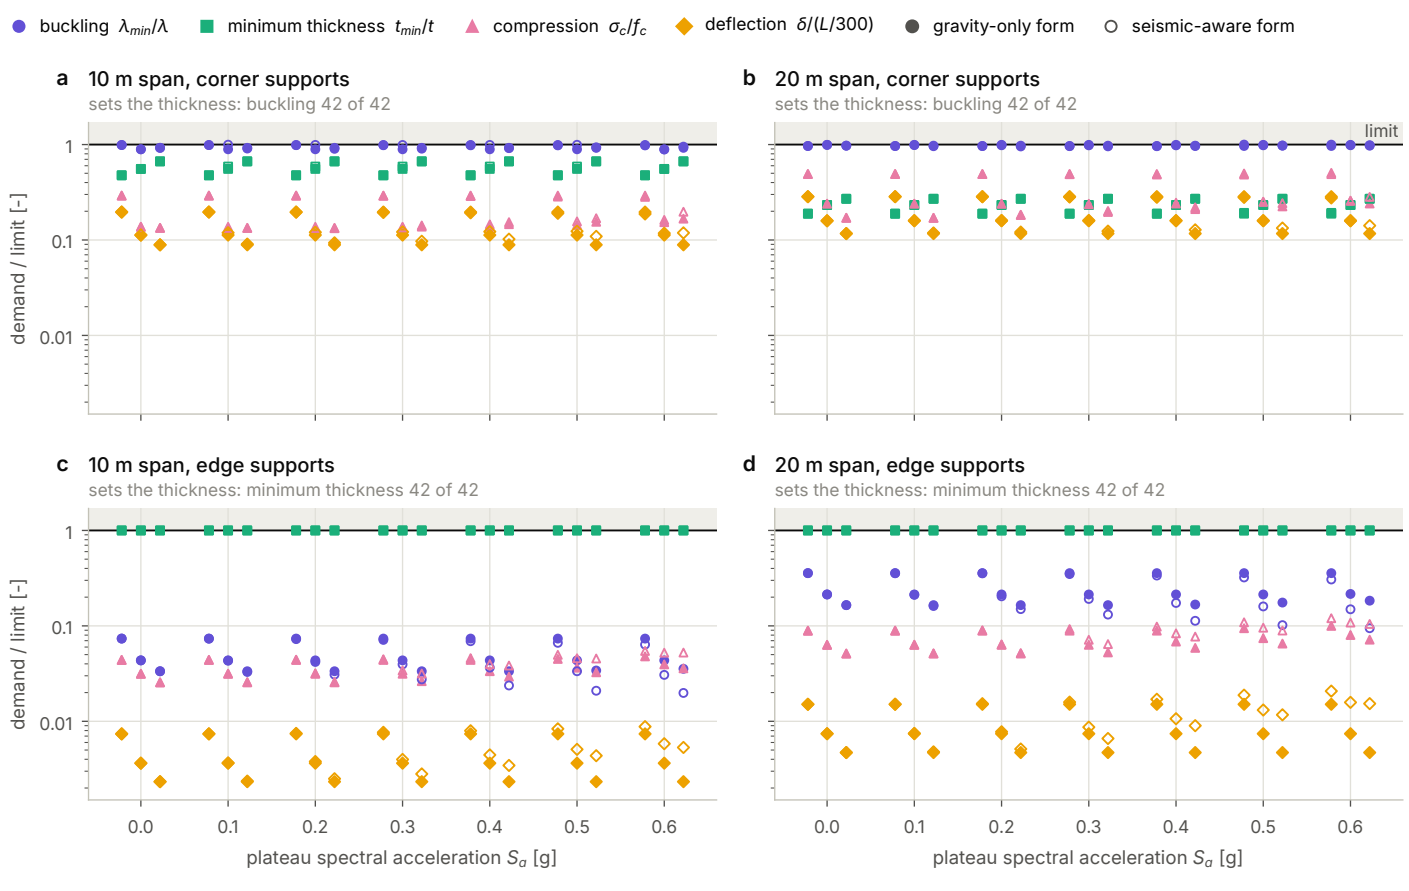
buckling λ_{min}/λ
minimum thickness t_{min}/t
compression σ_c/f_c
deflection $\delta/(L/300)$
gravity-only form
seismic-aware form
a 10 m span, corner supports
sets the thickness: buckling 42 of 42
b 20 m span, corner supports
sets the thickness: buckling 42 of 42
limit
c 10 m span, edge supports
sets the thickness: minimum thickness 42 of 42
d 20 m span, edge supports
sets the thickness: minimum thickness 42 of 42
demand / limit [-]
1
0.1
0.01
0.0
0.1
0.2
0.3
0.4
0.5
0.6
plateau spectral acceleration S_a [g]