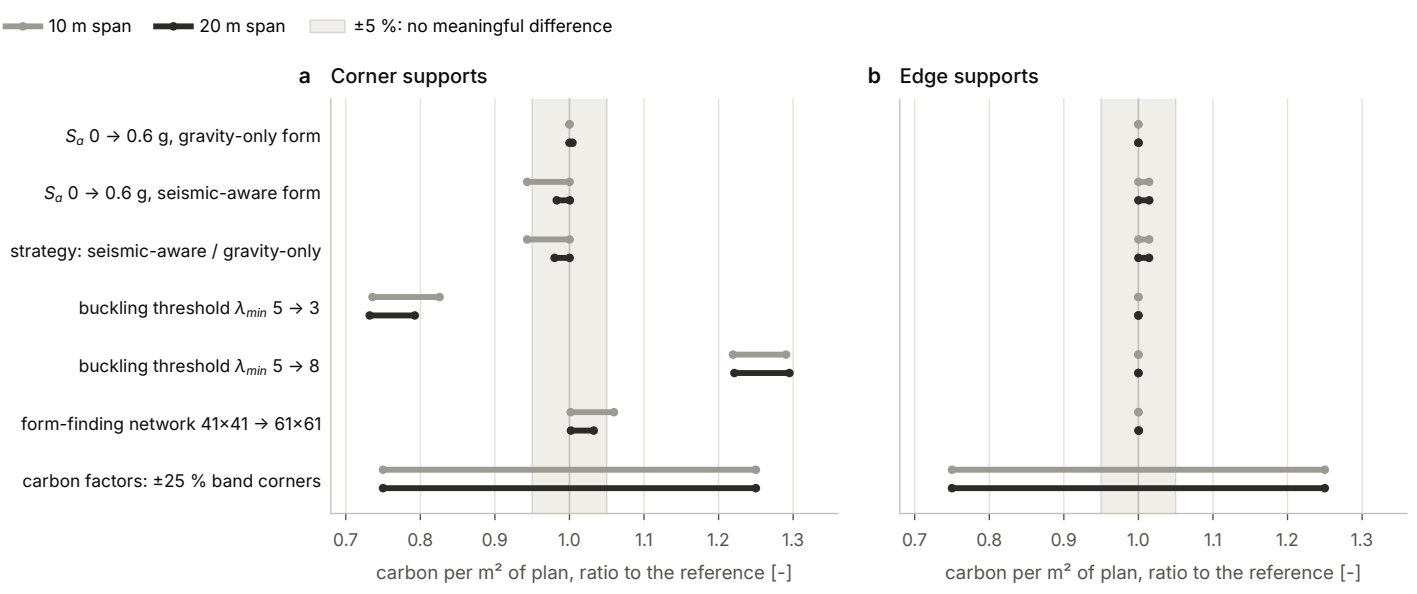
10 m span
20 m span
±5 %: no meaningful difference
a Corner supports
b Edge supports
$S_a$ 0 → 0.6 g, gravity-only form
$S_a$ 0 → 0.6 g, seismic-aware form
strategy: seismic-aware / gravity-only
buckling threshold $\lambda_{min}$ 5 → 3
buckling threshold $\lambda_{min}$ 5 → 8
form-finding network 41×41 → 61×61
carbon factors: ±25 % band corners
0.7
0.8
0.9
1.0
1.1
1.2
1.3
carbon per m² of plan, ratio to the reference [-]