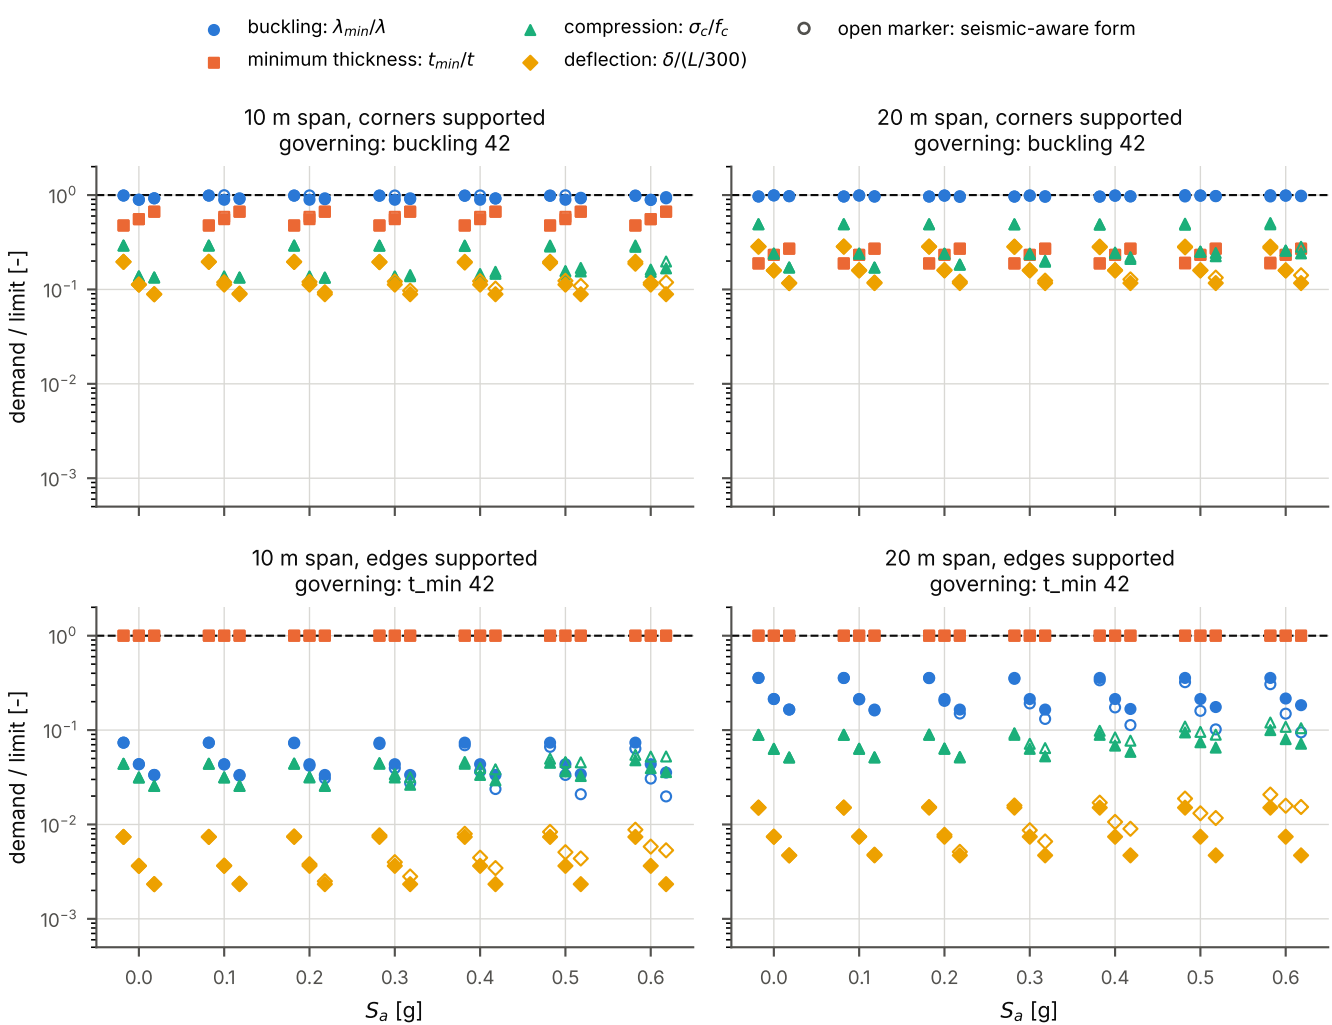
buckling: λ_{min}/λ
minimum thickness: t_{min}/t
compression: σ_c/f_c
deflection: $\delta/(L/300)$
open marker: seismic-aware form
10 m span, corners supported
governing: buckling 42
20 m span, corners supported
governing: buckling 42
10 m span, edges supported
governing: t_min 42
20 m span, edges supported
governing: t_min 42
demand / limit [-]
10^{0}
10^{-1}
10^{-2}
10^{-3}
0.0
0.1
0.2
0.3
0.4
0.5
0.6
S_a [g]