

VISVESVARAYA TECHNOLOGICAL UNIVERSITY, BELAGAVI



A

PROJECT REPORT ON

"AUTOMATIC SOLAR TRACKING SYSTEM"

**A PROJECT REPORT SUBMITTED IN PARTIAL FULFILMENT OF REQUIREMENT FOR
THE AWARD OF 5TH SEMESTER B.E COURSE DURING THE ACADEMIC YEAR 2023-24.**

BACHELOR OF ENGINEERING

IN

ELECTRICAL AND ELECTRONICS ENGINEERING

SUBMITTED BY:

SHIVSHANKAR

3GN21EE034

SYED RIYAN

3GN21EE038

SYED SHOAIB

3GN21EE040

VINAYAK

3GN21EE041

SHAIK MUDASSIR

3GN22EE416

UNDER THE GUIDANCE OF

Prof. SHUBHA.S



GURU NANAK DEV ENGINEERING COLLEGE, BIDAR

MAILOOR ROAD, BIDAR, KARNATAKA-585403

DEPARTMENT OF ELECTRICAL AND ELECTRONICS ENGINEERING

ACADEMIC YEAR 2023-24

Visvesvaraya Technological University, Belagavi
Guru Nanak Dev Engineering College Bidar-585403, Karnataka



Department of Electrical and Electronics Engineering

CERTIFICATE

This is to certify that the project report entitled "Automatic solar tracking System" is a bonafide work carried out by SHIVSHANKAR 3GN21EE034, SYED RIYAN 3GN21EE038, SYED SHOAIB UMER ALI 3GN21EE040, VINAYAK 3GN21EE041, SHAIK MUDASSIR 3GN22EE416 in partial fulfillment of the requirements for the award of degree in the course of Bachelor of Engineering in Electrical and Electronics Engineering by the Visvesvaraya Technological University, Belagavi during the year 2023- 24. It is certified that all the corrections/suggestions indicated for the internal assessment have been incorporated in the report deposited in the department library. The project Report has been approved as it satisfies the academic requirement in respect of project course prescribed for the Bachelor of Engineering Degree.

.....
Signature of Guide

Prof. Shubha.S

.....
Signature of HOD

Prof. Deepak Ghode

.....
Signature of Principal

Dr.Dhananjay.M

Name of the Examiners

Signature

1.

.....

2.

.....

DECLARATION

I, SHIVSHANKAR 3GN21EE034, SYED RIYAN 3GN21EE038, SYED SHOAIB UMER ALI 3GN21EE040, VINAYAK 3GN21EE041, SHAIK MUDASSIR 3GN22EE416 student of the 5th semester B.E in Electrical and Electronics engineering, Guru Nanak Dev Engineering College, Bidar, hereby declare that the project work entitled **"Automatic solar tracking System"** submitted to the Visvesvaraya Technological University during the academic year 2022-23, is a record of an original work done by me under the guidance of **Prof.Shubha.S**, Department of Electrical and Electronics Engineering, Guru Nanak Dev Engineering College, Bidar. This mini projectwork is submitted in partial fulfilment of the requirements for the award of the degree of Bachelor of Engineering in Electrical and Electronics Engineering. The results embodied in this project have not been submitted to any other university or institute for the award of any degree.

SHIVSHANKAR
SYED RIYAN
SYED SHOAIB
VINAYAK
SHAIK MUDASSIR

3GN21EE034
3GN21EE038
3GN21EE040
3GN21EE041
3GN22EE416

ACKNOWLEDGMENTS

The satisfaction and euphoria that accompany the successful completion of any work would be incomplete without mentioning the people who have made it possible, because success is the epitome of hard work. So, with gratitude, I acknowledge all those whose guidance and encouragement have made my efforts successful.

A special debt of gratitude is owed to my guide **Prof.Shubha.S**, for his gracious efforts and keen pursuit, which remains as a valuable asset for the successful completion of my project. Her dynamism and diligent enthusiasm have been highly suggestive, blended with an innate intelligent application have crowned my task with success.

I am highly indebted to our project coordinator **Prof.Shubha.S** for guiding and giving timely advices and suggestions in the successful completion of the project.

It gives me immense pleasure in expressing my heartfelt gratitude to **Prof.Deepak Ghode**, Head of Department, Electrical and Electronics Engineering for giving me the guidance and encouragement to complete my project successfully.

I would like to express my deep sense of gratitude to my principal **Dr.Dhananjay.M** for his continuous effort in inculcating a competitive environment in my mind and motivate me to bring out the best in me.

I am also thankful to all the staff members of the Electrical and Electronics Engineering Department for their support and co-operation. I thank every individual who have directly or indirectly influenced me to propel the project to its completion.

**SHIVSHANKAR
SYED RIYAN
SYED SHOAIB
VINAYAK
SHAIK MUDASSIR**

**3GN21EE034
3GN21EE038
3GN21EE040
3GN21EE041
3GN22EE416**

ABBREVIATIONS AND ACRONYMS

CdTe	- Cadmium Telluride
CIGS	- Copper Indium Gallium (di)Selenide
CSP	- Concentrated Solar Power
DC	- Direct Current
EMF	- Electromotive Force
I	- Current
I/O	- Input/Output
ICSP	- In-Circuit Serial Programming
IDE	- Integrated Development Environment
LCD	- Liquid Crystal Display
LDR	- Light Dependent Resistor
LUX	- Luminous Flux
MCU	- Microcontroller
MPPT	- Maximum Power Point Tracking
PV	- Photovoltaic
R	- Resistor
RPM	- Rotations per Minute
USB	- Universal Serial Bus
V	- Voltage

LIST OF FIGURES

Figure No.	Figure Name	Page No.
Figure 2.11	Pin Diagram of Arduino UNO	10
Figure 2.12	Block Diagram of Automatic Solar Tracking System	10
Figure 2.13	Concept of Using Two LDR	11
Figure 3.11	Earth Rotation	13
Figure 3.12	Earth Rotation and Revolution	14
Figure 3.13	Angle of elevation and zenith angle	15
Figure 3.14	Single Axis Tracker	17
Figure 3.15	Dual Axis Tracker	18
Figure 3.16	Fixed collector	18
Figure 3.17	Sun path diagram for Calcutta	19
Figure 3.18	Conversions taking place inside the Solar charge controller	21
Figure 4.11	Solar Cell	26
Figure 4.12	Symbol of LDR	26
Figure 4.13	Pin diagram of Arduino	27
Figure 4.14	Servo motor	27

TABLE OF CONTENTS

CONTENT	PAGE NO.
CERTIFICATE	ii
DECLARATIONS	iii
ACKNOWLEDGEMENTS	iv
ABBREVIATIONS AND ACRONYMS	v
LIST OF FIGURES	vi
ABSTRACT	1
CHAPTER 1: INTRODUCTION	
1.1 General Background	2
2.2 Literature Review	3
CHAPTER 2: METHODOLOGY	
2.1 Implementation	9
2.2 Theory of using Two LDR	11
2.3 Research Design	11
CHAPTER 3: THEORITICAL BACKGROUND OF SOLAR TRACKER	
3.1 The Earth: Rotation and Revolution	13
3.2 Types of Tracker	16
3.3 Fixed Collector	18
3.4 Maximum Power Point Tracking	20
3.5 Advantages & Pitfalls of Solar Energy	23
3.5.1 Advantages	23
3.5.2 Pitfalls	24
CHAPTER 4: HARDWARE PROTOTYPE	
4.1 Hardware Prototype	25
4.1.1 The Solar Input	26
4.1.2 The Controlling Circuit	26
4.1.3 Servo Motor	27

CHAPTER 5: CONCLUSION, FUTURE SCOPE

4.1.2 Conclusion	29
4.1.3 Future scope	30

ABSTRACT

Of all the renewable energies, solar energy is the only energy gained its popularity and importance quickly. Through the solar tracking system, we can produce an abundant amount of energy which makes the solar panel's workability much more efficient. Perpendicular proportionality of the solar panel with the sun rays is the reason lying behind its efficiency. Pecuniary, its installation charge is high provided cheaper options are also available. This project is discussed all about the design and construction mechanism of the prototype for the solar tracking system having a single axis of freedom. The main control circuit is based upon Arduino UNO. Programming of this device is done in the manner that the LDR sensor, in accordance with the detection of the sun rays, will provide direction to the DC Motor that in which way the solar panel is going to revolve. Through this, the solar panel is positioned in such a manner that the maximum amount of sun rays could be received. In comparison with the other motors, DC motor is the simplest and the suave one, the torque of which is high and speed of which is slow enough. We can program it for changing the direction notwithstanding the fact that it rotates only in one direction subject to exception as far as programming is concerned. 1985, first time ever it was witnessed for production of the silicon solar cells with an efficiency of 20 percent. Though a hike in the efficiency of the solar panel had a handsome increase still perfection was a far-fetched goal for it. Below 40 percent, most of the panels still hover to operate. Consequently, peoples are compelled to purchase a number of panels in order to meet their energy demands or purchase single systems with large outputs. Availability of the solar cells types with higher efficiencies is on provided they are too costly to purchase. Ways to be accessed for increasing solar panel efficiencies are a plethora in number still one of the ways to be availed for accomplishing the said purpose while reducing costs, is tracking. Tracking helps in the wider projection of the panel to the Sun with increased power output. It could be dual or single axis tracker.

Duality ragged up with better compatibility as far as tracking of the sunlight from both the axis is concerned. Commercially single tracker is cheaper to use through booming of power is considerable and therefore a minuscule increase in the price is worthy and acceptable, provided maintenance cost should float around on an average level.

CHAPTER 1: INTRODUCTION

GENERAL BACKGROUND

Bustling civilization is the vein through which modern civilization is operated. Energy day by day is put to use at its best to fulfil the desires and ambition of the peoples at large. Each and every corner of our life is caged with various layers of impediment and in this response, energy is becoming an indispensable factor. Therefore, the source of energy needs to be endless/ perpetual in order to carry this colossal population ahead. Human beings being evolutionary in nature are perhaps the best ever creation of nature is always in the race of envisaging the probable and available comforts and benefits in every possible angle in this perilous world. The evidential matrix manifests that in a dichotomy of various opinions what options best expedite the scarcity of energy in an immensely heterogeneous society like ours. Our motto is to endeavour in forwarding such noble goal of energy conservation.

Taking a look at the present scenario it is evident that conventional sources of energy such as coal, natural gas, oil, etc. are at the edge of extinction. Being in mortal combat with time itself to fulfil every demand for energy the demand for these resources for energy has escalated to its zenith. The conventional use of energies due to the burning of fossil fuels like coal, oil and natural gas, the whole environment is getting polluted. The present project, therefore, is orchestrated with components like LDR module, DC Motor, Photovoltaic array etc. according to which while the functioning of, unlike other use of the conventional energies, would not emit any pollution and in turn act as a reservoir of energy taken from the Sun itself. As adumbrated no other energy is more abundant than solar energy as per as its availability and freeness are concerned, utilization of which, compounded with rest of the fact of its conversion into electrical energy. Historically if counted, in the year 1881 for the first time ever solar panel was invented. Later on, all through the hands of Russell Ohl in the year, 1941 concept of the solar cell was conceived and subsequently workability of a solar panel has also advanced in comparison with the earlier span. Though it is improbable still it is not impossible as per as tracking of the mother energy is concerned in furtherance to which attempt has been taken through this project to confine every drop of energy from being left out. The DC Motor

adjacent with the system with the help of LDR module by measuring the intensity of the sun rays fixed on the upper edge of the solar panel will help the solar panel to revolve around proportionately with the movement of the Sun itself in order to grab and store the maximum amount of energy as it can. In pursuance of such objectivity, this project comes forth into existence.

When heat is the source of every creation, Sun produces the biggest ever energy in this solar system to produce and transcend life from one organism to the other. In this response, the project called "Automatic Solar Tracking System" serves the purpose of utilizing the maximum amount of energy taken from the Sun and to convert such energy into some other production. The basic endeavour is crooned to scoop out from this project in making this system an economically convenient subject, accessibility of which is easy and functioning of which is optimum in the end. In the wake of technological advancement when the pace of time is at its best to pass by, this system is a time worthy production, produced to create the best of its kind. In a stretch, it could be signified that this project which is an extension of solar energy, is a renewable source of energy, never-ending phenomena. It's only 10 to 20 per cent of the solar cells that are being used commercially out of which the best potential of the cells gets reflected and therefore scope for better use of the solar cells exist.

In the world of pollution, this system is an eco-friendly alternative, hence a valuable asset. When the ocean of pollution is encumbering every corner of life, this system would be able to create ripples of hope in the midst of this bustling civilization. The survivability of this system lies upon its workability. In the trend of comparison with other mind-boggling systems, it could be a trailblazer.

LITERATURE REVIEW

The paucity of available resources has forced contemporary society to look for measures to consummate the demands of the latter. With the nurturing civilization, the depletion of conventional fuels, due to human practices has been an alarm to sustainable development issues. The scarcity of energy and its source guided us towards the optimistic approach of using the alternative resources bestowed to humankind—Solar, tidal etc.

The Sun has been looked upon as an imperative source of energy. Solar energy is an eco- friendly resource as compared to its counterparts. The advancement of technology has out-turn foster techniques to utilize this energy into its own good use. Be it as thermal energy, electricity, fuel production and many more. Photovoltaic or concentrated solar power (CSP) systems are operated to transfigure the solar power expropriated by the earth into electricity. Solar tracking device utilizes this expropriated solar power through the channel of photovoltaic arrays, an oriented scaffolding of photovoltaic/solar cells.

Solar cells, also known as photovoltaic cells are used to convert light energy into electricity. Photovoltaic cells work on the principle of the photovoltaic effect, which is similar to the photoelectric effect. Differences being that the electrons in photovoltaic are not emitted instead contained in the material around the surface, creating a voltage difference. Solar cells are forged with crystalline silicon. It is the most commonly used material in a solar cell. The use of silicon in the solar cell has been very efficient and low cost. Two forms of crystalline silicon can be used to make solar cells. Other than silicon, solar cells can be fabricated with cadmium telluride (CdTe), Copper indium gallium (di)selenide (CIGS) etc. the fabrication of solar cells with materials other silicon is slightly expensive, thus making silicon the best material to be used in solar tracking systems.

One of the finest and extensively used material, monocrystalline silicon has an efficiency of about 15-20%. While under high temperature the performance of the cell material drops by 10- 15% of the initial.

Polycrystalline silicon is another form, cheaper than the latter but has the same band gap as that of monocrystalline silicon. Though it has the same band gap energy, it lags in efficiency, hence this material is used in low-cost products.

Amorphous silicon cells can work under extremely high temperatures, but the efficiency of these cells is comparatively lower than the other silicon forms.

The technologies which use CdTe, CIGS, Amorphous Thin-Film Silicon (a-Si, TF-Si) in the fabrication of solar cells are known as thin film photovoltaic modules. These thin-film solar cells are relatively cost-effective than the solar cells of crystalline silicon.

Cell Technology	Crystalline Silicon	Thin Film Silicon
Types	<ul style="list-style-type: none"> • Mono-crystalline silicon (c-Si) • Poly-crystalline silicon (pc-Si/ mc-Si) 	<ul style="list-style-type: none"> • Amorphous Silicon (a-Si) • Cadmium telluride (CdTe) • Copper indium gallium (di)selenide (CIG/CIGS)
Temperature resistivity	Lower	Higher
Module Efficiency	13-19%	4-12%

Table 1.1: Types of Solar cell based upon the material

There are several other factors on which the efficiency of a solar cell depends.

- Cell temperature
- Energy Conversion Efficiency
- Maximum power point tracking

Solar panels are a cumulative orientation of photovoltaic cells. The PV cells are arranged in a solar panel or a PV array such that it serves the purpose of exciting the electron of the material consisting inside the solar cells using photons. The average amount of sunlight received by solar panels particular depends on the position of the sun.

Being a repository of energies, Sun witnessed to be the eminent and ever continuing source of emitting radiation from it. A part of this source of natural energy is received by the solar panel. Certain ways have been developed to utilize this energy source as an alternative to other non-renewable sources. Considering its multitudinous flourishing ways in which it can be applied to bring about the change in conserving other resources, the manipulation of the energy source is encouraged.

Solar panels are hence used to utilize solar power in electrical means. They are aligned different arenas to collect maximum solar power. Though, solar panels can be used to absorb or

collect solar power, their work is bounded to certain hours of the day and the sunlight pouring directly on them, i.e. the angle between the sunrays and the panel is orthogonal. While at other hours of the day, the angle of the sunrays is different, hence the amount of the solar power captured is very less. To overcome such pitfalls, and encapsulate the maximum available of solar energy the solar tracking systems were introduced. A solar tracking system is designed with the intention of keeping the angle between the sunrays and the solar array 90° .

The solar tracking system have three different modules-

- The mechanism
- Driving motors
- The tracking controller.

The mechanism is accountable to furnish with accurate movements, in the sake of following the footsteps of the sun throughout the day. The prototype of the device is made durable enough to withstand unfavorable weather condition. This mechanism of the solar tracking systems classifies themselves into two segments single axis tracker, dual axis tracker.

Single axis tracking can be considered as one of the handy systems or prime solution in terms of small-scale photovoltaic power plants. Single axis tracking can be done using three different arrangements, which are based on the different axes of tracking-

- Inclined shaft installation
- South-North axis horizontal installation
- East-West axis horizontal installation.

Single axis tracker tracks in a single cardinal direction. The tracker has a single row tracking configuration. The above maintained methods are the different arrangements in which single axis tracker can be implemented. The working mechanism of all the maintained methods is at par with each other. The angle of the sun with the surface of the collector is computed and examined, the collectors are thus charged to track down the movement of the sun to meet the expectations of captivating a greater percentage of solar radiance.

There are numerable other imposition of single axis tracking tracker, including

- Horizontal Single Axis Tracker (HSAT)
- Horizontal Single Axis Tracker with Tilted Module (HTSAT)

- Vertical Single Axis Tracker (VSAT)
- Tilted Single Axis Tracker (TSAT)
- Polar Aligned Single Axis Tracker (PSAT)

The rotational axis in the dual axis tracker are orthogonal to each other. One of the axes is fixed in accordance with the ground level. This axis is known as the primary axis and the other axis is hence called the secondary axis. Dual axis trackers moved along two cardinal directions, horizontal and vertical. There are many applications of the dual axis tracker, the two most common being-

- Tip-Tilt Dual Axis Tracker
- Azimuthal Altitude Dual Axis Tracker.

The efficiency of these tracker is much more than any single axis tracker. It conventionally follows the movement of the sun and hence captures maximum solar energy. On the basis of the **driving mechanism** solar trackers can again be of two kinds active solar trackers and passive solar trackers. The mechanism which makes use of electric motors such as DC motor, can be termed as active driving mechanism. The passive ones are simply controlled by the movement of the earth that is the gravitational forces.

Solar **tracking controller** can also categorize solar trackers into two different modules

1. Open loop control- The approach followed requires microprocessor. This method has an inbuilt prototype which is based upon the records of the movement of sun throughout the day. Hence, the microcontroller computes the time and determines the position of the sun at that particular hour. The control system is not affected by any geographical conditions.

2. Closed loop control/Feedback controllers- This control system utilizes photo sensor to compare the light intensity. These sensors are fixtures at the side of panel and help in detection of the position of the sun.

The prototype used in this research, is that of a horizontal single axis tracker. The tracking system utilizes photosensitive sensors to track down the movement or the path of the sun. This type of tracking technique is classified as active solar tracking. It is based on feedback control system or closed loop controlling. The intensities of light in our system are compared and the solar panel is charged to move in the direction of maximum available intensity. Thus, the system works on the feedback of the weather condition.

Effect of light intensity

Variation in the intensities of light plays a significant role in depicting the amount of power output. This change in intensities monitors all the technical criterions such as voltage, circuit current, efficiency, shunt resistance etc. As a result, higher the intensities of light, greater is the power output.

The efficiency of solar panel

The efficiency is one of the most significant criteria which defines the quality of the output of a certain device. There are many factors which alter the efficiency of a solar panel. Efficiency can be described as the ration of the input energy through the solar cell to the energy of the sun. The efficiency of the solar panel is monitored by the light intensity, material of the solar cell, temperature etc.

For the calculation of the energy, we calculate the maximum power, which is defined as the product of open-circuit voltage (V_{OC}), short-circuit current (I_{SC}) and fill factor (FF).

$$P_{max} = V_{OC} I_{SC} FF$$

The efficiency (η) is then calculated as: -

$$\eta = \frac{V_{OC} I_{SC} FF P_{in}}{P_{in}}$$

Where, P_{in} is the total input power

CHAPTER 2: METHODOLOGY

2.1 IMPLEMENTATION

The use of solar energy as a renewable source has gained significant attention in recent years. One of the challenges in harnessing solar power efficiently is maximizing the amount of sunlight that reaches the solar panels throughout the day. This is where an Automatic Solar Tracking System comes into play. By utilizing an Arduino Uno microcontroller and a Servo Motor, this system can automatically adjust the position of solar panels to track the movement of the sun and optimize their energy.

The Arduino Uno serves as the brain of this project, providing an easy-to-use platform for programming and interfacing with external components. It allows us to read data from light sensors and calculate precise angles for positioning the solar panels. The Servo Motor plays a crucial role by physically adjusting the position of the solar panels. It can rotate within a specific range, making it ideal for tracking movements such as following the sun's path across the sky. By connecting it to the Arduino Uno, we can control its movement based on sensor inputs.

This technology has immense potential for both present and future applications. In today's world, optimizing solar panel efficiency is vital for maximizing renewable energy generation, reducing reliance on fossil fuels, and combating climate change. Implementing Automatic Solar Tracking Systems using Arduino Uno can significantly increase energy output from photovoltaic installations. Furthermore, ongoing research aims to improve tracking algorithms to make them more accurate and efficient at following celestial movements like sunrise/sunset times or even accounting for factors like weather conditions or shading caused by nearby structures. These advancements will further enhance our ability to harness solar power effectively.

In conclusion, Automatic Solar Tracking Systems using Arduino Uno provide an innovative solution to improve solar panel efficiency by tracking sunlight automatically throughout its daily trajectory across the sky. This technology not only optimizes renewable energy generation in current applications but also holds promise for future advancements in this field..

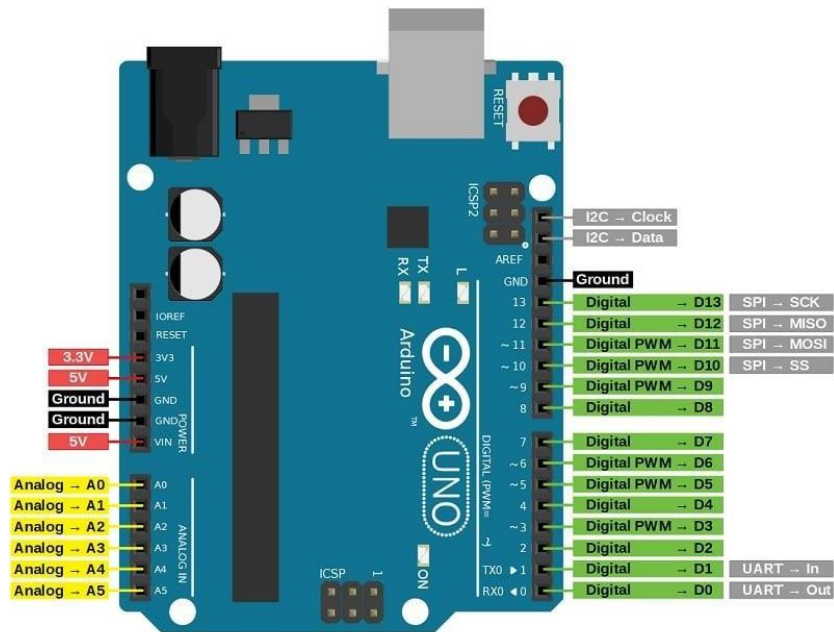


Figure 2.11 Pin Diagram of Arduino UNO

Before being consolidated into one system, three independent stages are engineered independently. This approach, similar to stepwise refinement in modular programming, has been employed as it ensures an accurate and logical approach which is straight forward and easy to understand. This also ensures that if there are any errors, they are independently considered and corrected.

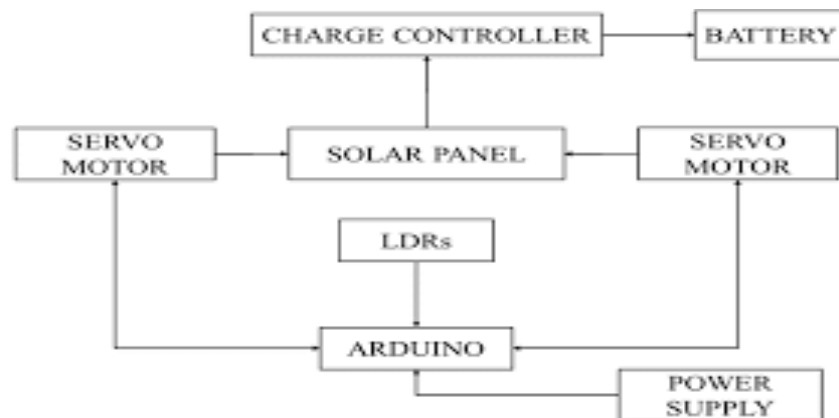


Figure 2.12 block diagram

2.2 THEORY OF USING TWO LDR

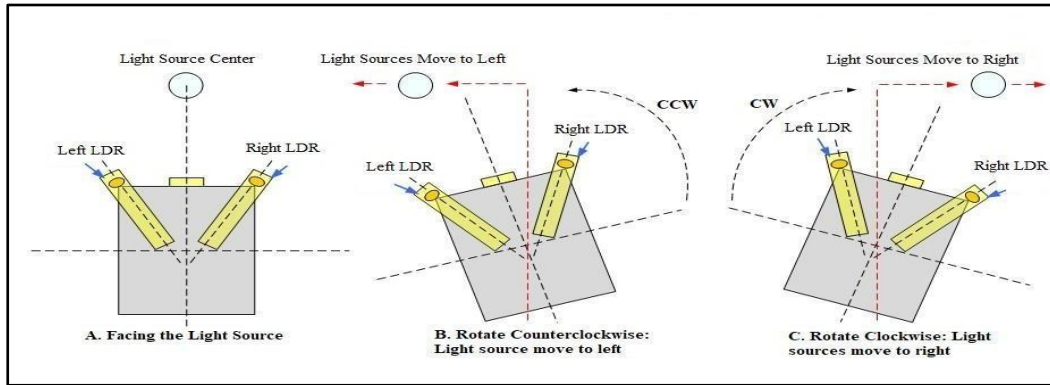


Figure 2.3: Concept of using Two LDR

The figure depicts the notion for the instalment of the light dependent resistors (LDR). A secure state is attained when the light intensities of the two LDR become the same. The principal source of light energy, the Sun, moves from east to west. This movement of the Sun causes the variation in the level of light intensities falling on the two LDRs. The designed algorithm compares the variation in the light intensities inside the microcontroller and the motor then is operated to rotate the solar panel, so it moves aligned with the trail of the light source.

2.3 RESEARCH DESIGN

Contemplating the idea of building the said project, the idea that has been conceived primarily is to make the best use of solar energy. The next path that unravels is firstly the method to be adopted in storing the solar energy at its maximum level which further ends up with hatching of the project called “AUTOMATIC SOLAR TRACKING SYSTEM”. Culminating towards making the said project caviar in its utilization several components have been unleashed, some of which are mentioned so-

1. Solar Panel,
2. DC Motor,
3. LDR sensor module,
4. Resistors

All in consolidation of the said components the concerned project is orchestrated, ought to seek for imbibing the sun rays at its maximum level through the LDR sensor module etched on the edges of the solar panel in accordance with the length of it, revolves in aid with the DC motor by maintaining the proportionality of the Sun's movement. Therefore, the genesis lies upon the fact of making solar energy a profitable source in the production of various other aspects which are in rest with the acute need of the society. In addition to which it would be further worthier to state that when the world is being maligned and sick through the pollution ruckus this project could unveil to be a robust endeavour.

CHAPTER 3: THEORITICAL BACKGROUND OF SOLARTRACKER

3.1 The Earth: Rotation and Revolution

The position of the sun changes continuously throughout the day. It is due to the motion of earth that we experience sun at different angles in the sky. Earth exhibit two types of motion. One is the motion of earth along its own axis, and the other is the earth revolving around the sun. the motion of the earth along its own axis, known as **rotation**, results in the phenomenon of days and nights. One rotation of the earth takes 23 hours and 56 minutes. On its own axis, the motion of the earth is west to east.

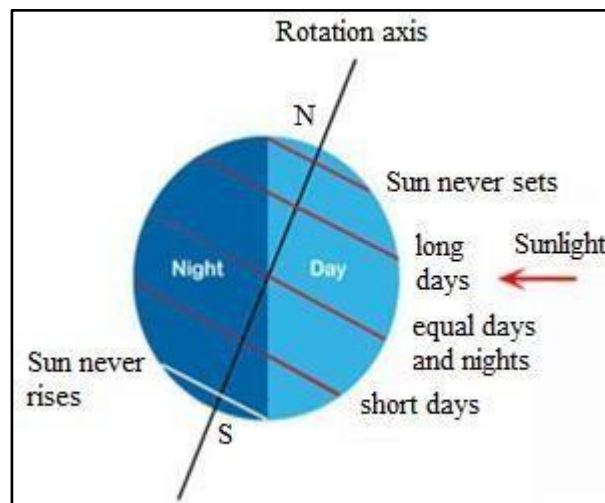


Figure 3.11 Earth Rotation

Revolution, that is the motion of the earth around the sun is responsible for the different seasons in the year. The earth takes 365 days to revolve around the sun. Earth revolves around the sun in an elliptical orbit and the plane covered by the earth during the revolution is known as an ellipse. The axis of rotation and ellipse makes an angle of 66.5 degrees between themselves. This is the explanation behind the summer/winter solaces and spring autumn equinoxes. Due to these motions of the earth, the amount of sunlight received throughout the year varies.

Sunlight is the electromagnetic radiation from the sun expropriated by the earth. The total power given off by the sun into space is much more than that intercepted by the earth.

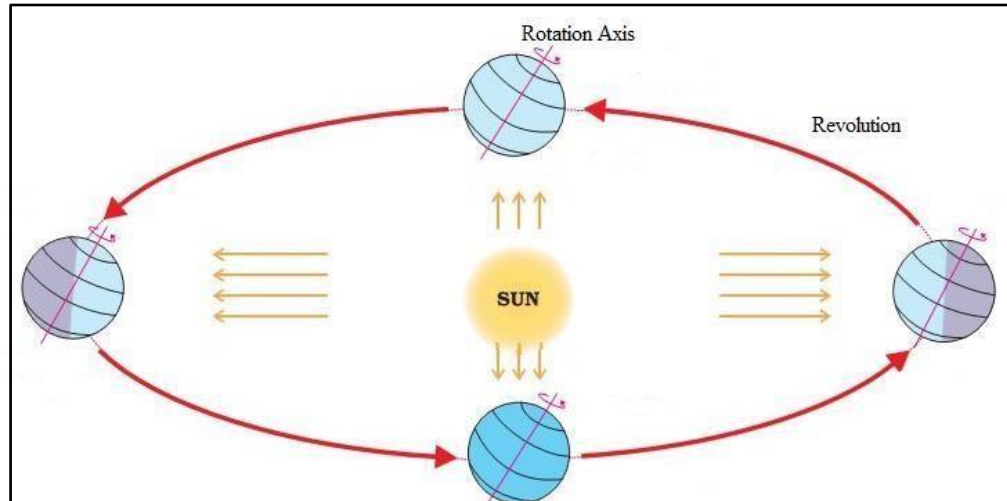


Figure 3.12: Earth Rotation and Revolution

Within a given period of time, the emission of solar radiation is somewhat constant and the intensity this radiation hitting a unit area of the earth's crust is also constant, known as solar constant. The value of this solar constant can be expressed as: -

$$G_{sc} = \sigma \cdot T^4 \cdot (4\pi R^2) = 1367 \text{ W/m}^2$$

In the above expression, σ is termed as Stefan Boltzmann Constant with a value of $5.67 \times 10^{-8} \text{ W/m}^2 \cdot \text{K}^4$, R is known as the radius of the Sun, $696 \cdot 10^6 \text{ m}$ and D is $150 \cdot 10^9 \text{ m}$, the average distance between the Sun and the earth.

The absorption of solar radiation on the surface of the earth also varies with different parameters. Latitude and longitude are one of the prescribed parameters. Latitude the horizontal imaginary line, parallel to the equator, is the angle suspended by the arc linearly join a person's position and the equator, at the center of the earth. On the contrary longitudes are the vertical imaginary lines, where longitude is the angle suspended by the arc joining the north-pole and south-pole as well as passing through the given location, linearly with the Greenwich meridian, at the center of the earth. The latitude and longitude express north-south and east-west directions respectively on the earth.

The sunlight is observed at different angles depending on the place on the earth and the angles of the sun. The sun's angle can be classified into the following: -

- Zenith Angle
- Elevation Angle

- Azimuth Angle

The elevation angle is the angle made by the sun with the horizon. The elevation angle is 0 degree at sunrise and 90 degrees around noontime, at the equator. The elevation angle is different at a different time of the day and different for different latitudes. The depicted formula can be used to determine the elevation angle.

$$\alpha = 90 + \varphi - \delta$$

When the equation above gives a number greater than 90° then subtract the result from 180° . It means the sun at solar noon is coming from the south as is typical the northern hemisphere.

φ is the latitude of the location of interest (+ve for the northern hemisphere and -ve for the southern hemisphere). δ is the declination angle, which depends on the day of the year.

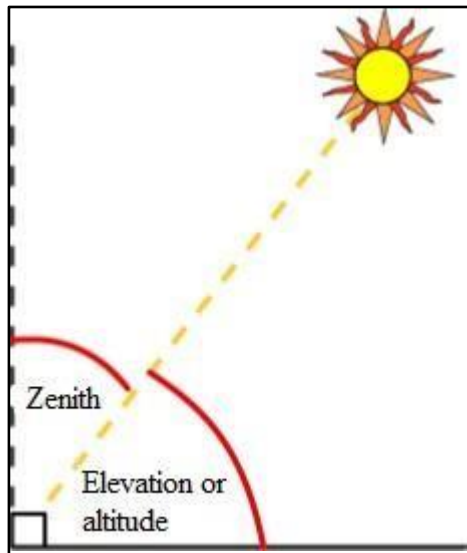


Figure 3.13: Angle of elevation and zenith angle

Zenith angle is akin with elevation angle. The only difference being it is measured along the vertical. Therefore, it's the angle between the sun and the vertical i.e. $\text{Zenith Angle} = 90^\circ - \alpha$

Azimuthal Angle, this is the compass direction from which the sunlight is coming. At solar noon, the sun is directly south in the northern hemisphere and directly north in the southern hemisphere. The azimuth angle varies throughout the day. At the equinoxes, the sun rises directly east and sets directly west regardless of the latitude. Therefore, the azimuth angles are 90 degrees at sunrise and 270 degrees at sunset.

Sunrise and Sunset time can be formulated by the following formulas-

$$\text{Sunrise} = 12 - \frac{1}{60} \cos^{-1}(-\tan \phi \tan \delta) - \frac{TC}{60}$$

$$\text{Sunset} = 12 + \frac{1}{60} \cos^{-1}(-\tan \phi \tan \delta) - \frac{TC}{60}$$

Where ϕ being the latitude of the place, δ being the declination angle and TC is the TimeCorrection.

3.2 Types of Solar Tracker

Types	Specification
Active Solar Tracker	<ul style="list-style-type: none"> • It uses motors and gear trains or direct drive actuators, to follow the movement of the sun. • Directed by a controller. • Deactivates during darkness based on the design of the system. • It uses a light sensor to locate the angle at which maximum sunlight can be absorbed. • The MCU directs the solar panel to change the angle.
Passive Solar Tracker	<ul style="list-style-type: none"> • It uses a liquid, easily compressible and boiled. • It is driven by the solar heat. • The fluid moves when heated, like a teeter-totter and hence the solar panel moves.
Chronological Solar Tracker	<ul style="list-style-type: none"> • Works with the rotation of the earth. • Have no sensors. • Depends on the geographical location. • Uses a controller to calculate the moment and position of the earth with respect to the sun at a given time and location.

Single Axis Tracker	<ul style="list-style-type: none"> • Tracks in a single cardinal direction. • It has a single row tracking configuration. • More reliable. • It has a longer lifespan. <p>The common categories in which single axis trackers can be classified holds:</p> <ul style="list-style-type: none"> • Horizontal single axis trackers (HSAT). • Horizontal single axis tracker with tilted modules (HTSAT). • Vertical single axis tracker (VSAT). • Tilted single axis tracker (TSAT). • Polar aligned single axis tracker (PSAT).
Dual Axis Tracker	<ul style="list-style-type: none"> • It moves along two cardinal directions (Horizontal & Vertical). • The axes are traditionally orthogonal. • Its efficiency is much more than any single Axis Tracker. • It conventionally follows the movement of the sun and hence captivates maximum solar radiations.

Table 3.1: Types of Solar Tracker

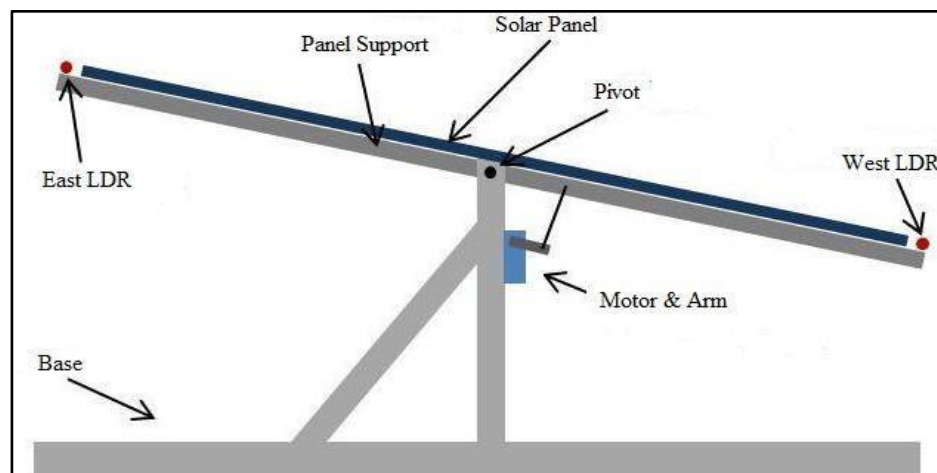


Figure 3.21: Single Axis Tracker

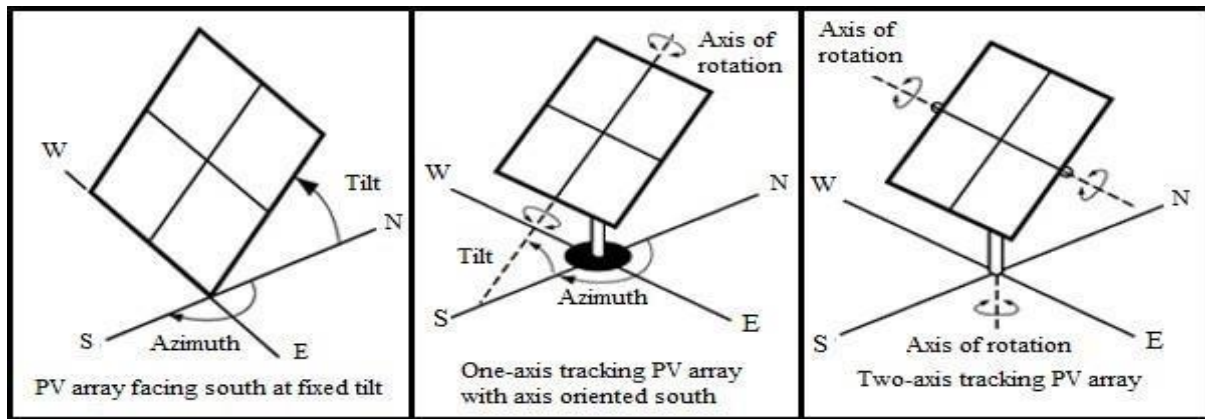


Figure 3.22: Dual Axis Tracker

3.3 Fixed Collectors

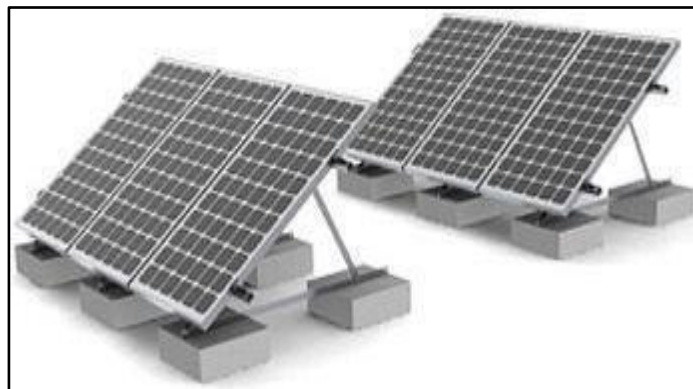


Figure 3.31: Fixed Collectors

The fixed collectors are secured at a place where the gross solar energy obtained is comparatively higher than most of the predefined places and the inclination is kept in accordance with the defined context. The motive is to install collected places which are subjected to receive the maximum amount of sunlight and collect solar energy over a long period of time hence the demand for tracking devices can be overcome. This creates a substantial diminution in the expenses and the preservation of the collectors. The knowledge of the movement of the sun throughout a season and different hours of the year is essential to enable maximum captivation of solar energy.

The Sun chart for Calcutta is shown below


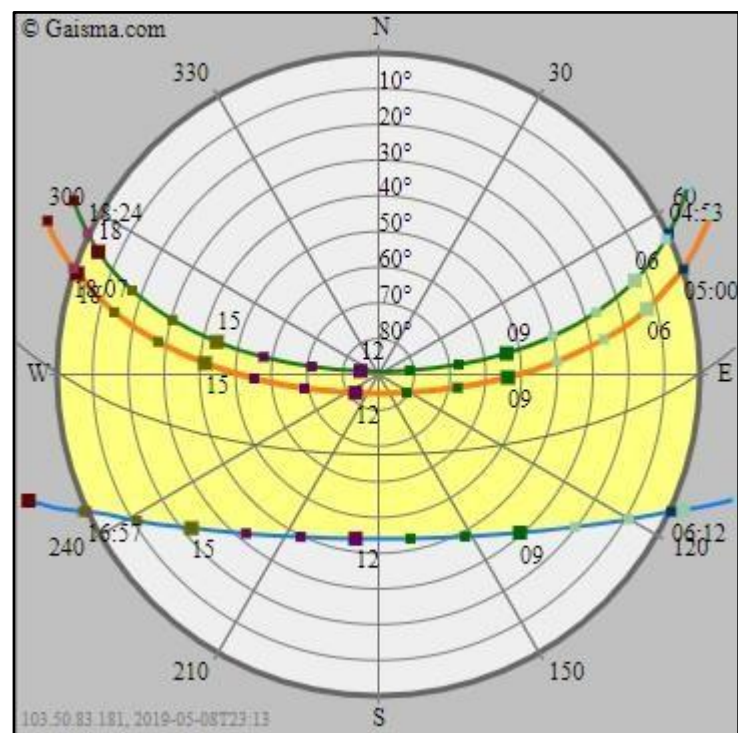


Figure 3.12: Sun path diagram for Calcutta

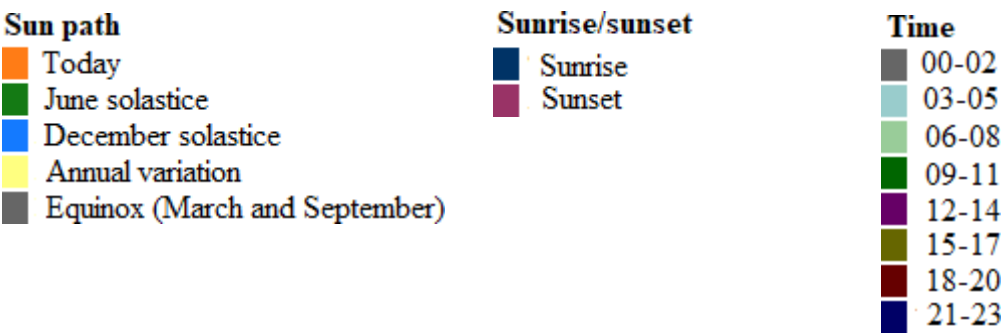

Through the use of the chart, it is possible to ascertain the position of the sun at different times and seasons so that the panel can be fixed for maximum output. Fixed trackers are cheaper in tropical countries like Kenya. For countries beyond +10 degrees North and -10 degrees South of the equator, there is need for serious tracking. This is because the position of the midday sun varies significantly.

The chart shows that the position of the sun is highest between 1200h and 1400h.

For the periods outside this range, the collectors are obliquely oriented to the sun and therefore only a fraction reaches the surface of absorption.

3.4 Maximum power point tracking

Photovoltaic cell shares a composite bond with the surroundings they work and the maximal power generated. The non-linear electrical tendencies of a solar cell is indicated by a ratio of solar cell's maximum power to the product of open-circuit voltage and short circuit current, also known as fill factor. Based on the three parameters, which are the fill factor (FF), open-circuit voltage (V_{oc}) and short-circuit Current (I_{sc}) the electrical tendencies of a photovoltaic cell can be determined undersituational environments.

Under working environment, as derived by Ohm's Law, a certain voltage (V) and current (I) values which correlated to that single point at which the power obtained is maximum, corresponds to a certain load, resistance. The I-V curve of photovoltaic cells behaves as a current constant source for most of the region. Once the maximum power point region is reached, there are changes in the curve as the curve now describes a relationship of current and voltage as inversely exponential. So the elementary circuit theory describes that the power obtained from the device where the magnitude of the gradient of the curve is at par and opposite to the current voltage ratio, can be termed as maximum power point.

Therefore, in the exposition of photovoltaic modules, among the given space and time, there lies a point from which the power dragged is maximum. This point in the PV module is known as maximum power point and the methodology of tracking down this point to ensure that our controlling point always stays around this maximum power point tracking.

The proposition of maximum power point tracking is to collect the maximum power, by setting the most effective voltage in PV module. The juxtaposition is done between the output voltages with the battery voltage. They extract the high voltage power from the PV modules and modify them to fulfill the requirement of charging lower voltage batteries. The power is henceforth converted to the best voltage to obtain maximum current in the battery.

MPPT solar charge controller

There have been such charge controllers created and inscribed with maximum power point tracking algorithm to considerably increase the quantity of current supplied to the batteries from the photovoltaic modules.

The alteration done in the process or the conversions taking place are shown in the figure below:

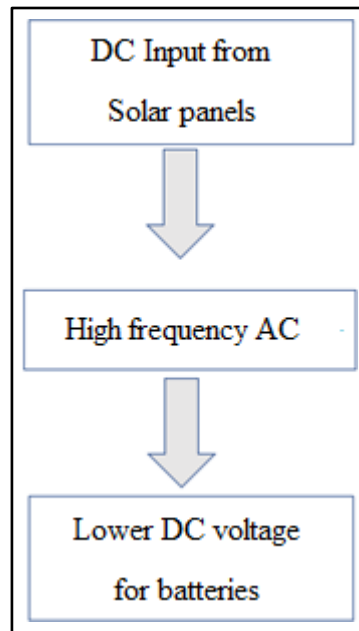


Figure 3.41: Conversions taking place inside the Solar charge controller

The work is to optimize the photovoltaic modules with the batteries. Some more examples of DC-DC converters:

- Boost controllers
- Buck converters

The implementation of the MPPT solar charge controller can be done in off-grid solar power system like

1. Stand-alone solar power system,
2. Solar home system,
3. Solar water pump system, etc.

Features of MPPT solar charge controllers

- MPPT solar charge controllers are used to sense the alterations in the characteristics of a solar cell depicted by I-V curve for any applications which has PV module as energy source.
- MPPT solar charge controllers are devised to withdraw maximum power from photovoltaic modules, they push the photovoltaic modules to work on voltage surrounding maximum power point to

enable the extraction of maximum power.

- MPPT solar charge controllers provides access to the user to operate PV module of voltage output greater than the driving voltage of battery system.
- The complications of a highly efficient system's output is negotiated by MPPT solar charge controller. Moreover, since the output of photovoltaic power is utilized to charge DC-DC converter, the MPPT solar charge controller can be made to operate with more energy sources.
- MPPT solar charge controller can not only be utilize with PV modules but can also be subjected to the other various renewable energy sources. For example, smaller water turbines, wind turbines etc.

Classification of power controllers on their different kinds of approach towards the optimization of power output of the photovoltaic cells.

There are certain kinds of algorithms which are utilized from time to time based on several conditions. The classification is done on the basis of above criterions: -

Perturb and observe – One of the most popular maximum power point tracking method among the others, also known as hill climbing method, is one of the most often utilized method as the execution of this algorithm is quite elementary. In this method the voltage source is monitored by the controller and the magnitude is increased slowly and the power is observed for every small change of voltage. With the increase in voltage, there is an increase in the power as well and this change is voltage is brought till there is no alteration in the magnitude of power. This method can be a very fruitful method provided other parameters and techniques are taken care of Incremental Conductance_- Unlike, perturb and observe method, this method senses the alteration in the situations more abruptly. The consequent output voltage is calculated by observing the increasing voltage and current of the photovoltaic array. This method involves a little more calculative algorithm.

The algorithm of this method is designed to compare the changing conductance (I/V) with the conductance of the photo voltaic array. When there two parameters are at par with each other the output voltage becomes responsible for maximum power generation.

Current Sweep- in this method, an upgradation of an I-V characteristic of photovoltaic module at certain time intervals i.e. a sweep waveform, is done and then the maximum power is calculated from this curve.

Temperature Method – The algorithm for this method works of the equation: -

$$V_{mpp}(T) = V_{mpp}(T_{ref}) + uv_{mpp}(T - T_{ref})$$

In the above equation, V_{mpp} stands for the maximum power point voltage and uv_{mpp} is the temperature

coefficient of V_{mpp} . T and T_{ref} are temperatures, calculated and taken from references respectively. So, in this method the maximum power point is calculated or assumed by observing the temperature of the solar panels. The voltage is expected to alter on the basis of temperature linearly. The temperature observed is referred to reference and hence the output voltage is computed from the above equation. The algorithm used in this method is comparatively simpler and hence power utilization is less. Moreover, the method is flexible enough to be implemented on both analog and digital circuit. What makes it out stand is, since the variation of temperature with respect to time is lethargic, the oscillation in power output is omitted.

Where the MPP trackers should be placed?

Initially, there were solar inverters used to perform maximum power point tracking for all the PV modules installed. The system was such that there was a single current supply for all the modules present. The modules were arranged in series with each other. But as the parameters of different modules, differs with each other due to manufacturing forbearance, partial shading, etc., the I-V characteristic and output of each module differs as well. Since, our supply is same throughout the arena, some module gets restrained from generating maximum power. As a result, the efficiency of the system is considerably decreased.

Now a days, companies have started to install maximum power point trackers inside each module to increase the maximum power generation and hence, allow to work on its maximum efficiency.

3.5 Advantages and Pitfalls of Solar Energy:

3.5.1 Advantages: -

- The process of attaining solar energy is unsoiled.
- It is a renewable source of energy.
- The investment is done only during the installation of solar panels, the expenses of acquired solar energy after installation is little.
- Solar energy is a perennial source of energy.
- There is no adulteration in the process of acquiring solar energy.
- The yield rate is very high, using solar panels.
- It requires the least maintenance, once the setup is installed.
- Solar energy is very useful and can be easily drawn into applications in rural areas where the extraction of electricity is difficult.
- Solar energy does not create noises compared to the noises created by the machinery in the extraction of other natural resources.

3.5.2 Pitfalls: -

- The installations of the solar panel could be pretty expensive, which would require huge investments and years of saving.
- Production of electricity is directly dependent on the energy captivated which is interlinked with the path sun covers. This factor could bring many countries to **disadvantage**.
- The power station of solar energy lags in the production of the latter as compared to the traditional power stations. Moreover, the costs of building such solar power stations could be exorbitant.
- The consumption of solar energy during the night requires the energy to be stored in large batteries, which would hence occupy a huge section.

The utilization of solar energy is encouraged as the number of merits exceeds the number of demerits.

CHAPTER 4: HARDWARE & PROTOTYPE

The framework of this project can be classified in to two main modules:

- The hardware prototypes
- The software designs

4.1 The Hardware Prototype

The hardware prototype is assembled of different electronic devices, and elementary materials used for the mechanical support. The electronic devices/circuit that are utilized in the prototype are again subdued under three basic titles.

- The Solar input
- The controlling circuit
- The driving motors

For the mechanical structure, uses steel rods to create two pillars of support for the solar panel as well another rod used for the axis of rotation attached to the driving motors.

4.1.1 The Solar Input

The solar input comprises of the solar panel and two modules of photo sensors, each of which is joined to the solar panel along its length on either side of the panel. The solar panel is supported to the wooden base by the mechanical structure. The photo sensors are hence, connected to the controlling circuit.

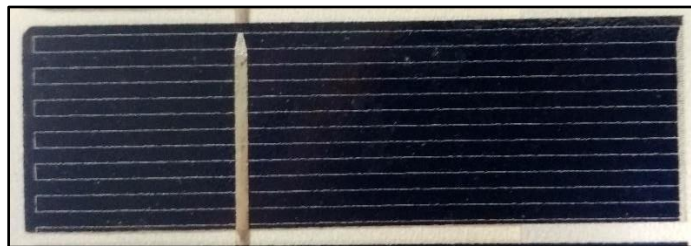


Figure 4.1: Solar Cell

The photo sensors used in the prototype are Light Dependent Resistors

4.1.2 Light Dependent Resistor

The conundrum of light dependent resistor and photoresistor is used in a supplementary and in a complementary manner inter alia in a synonymous form. By being the light- sensitive devices, it's an embodiment of resistivity which is the function of incident electromagnetic radiation. Photoconductors and photoconductive cells or simple photocells are some of the names by which such devices are also designated. Constituted out of semiconductor materials, these devices are substantiated with high resistance. Symbolic balkanization is the means to indicate the LDR, one of the most commonly used symbol is shown in the figure below. The arrow indicates light falling on it.

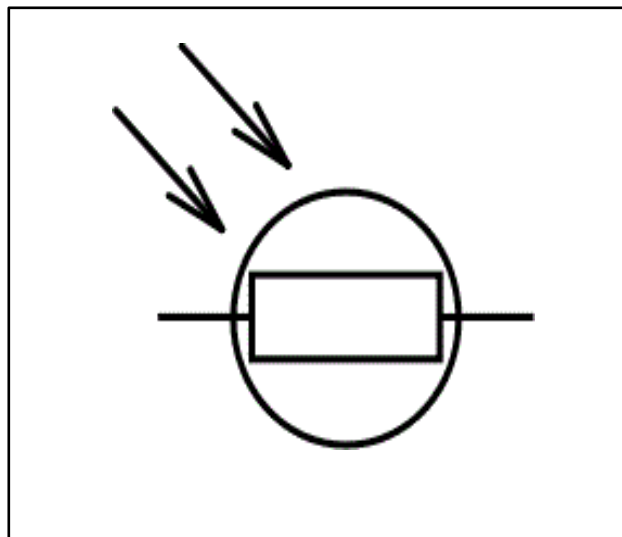


Figure 4.12: Symbol of LDR

4.1.3 The Controlling Circuit

The controlling circuit is designed with a microcontroller. The microcontroller is inscribed with some algorithm to compare and detect the direction of light intensities being maximum. The microcontroller uses the inputs from the photo sensors and then forwards the results after computation to the driving module. The microcontroller we use in our design is Arduino .

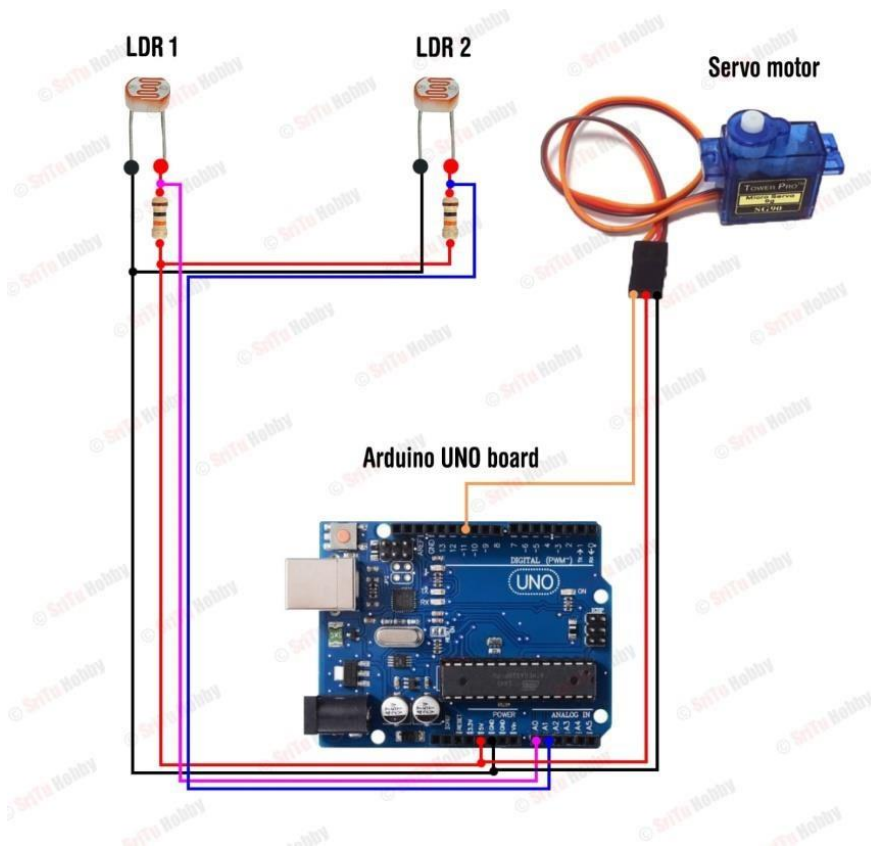



Figure 4.13: Circuit Diagram

4.1.4 Servo Motor

Tiny and lightweight with high output power. Servo can rotate approximately 180 degrees (90 in each direction), and works just like the standard kinds but smaller. You can use any servo code, hardware or library to control these servos. It comes with a 3 horns (arms) and hardware.



Figure 4.14: Servo Motor

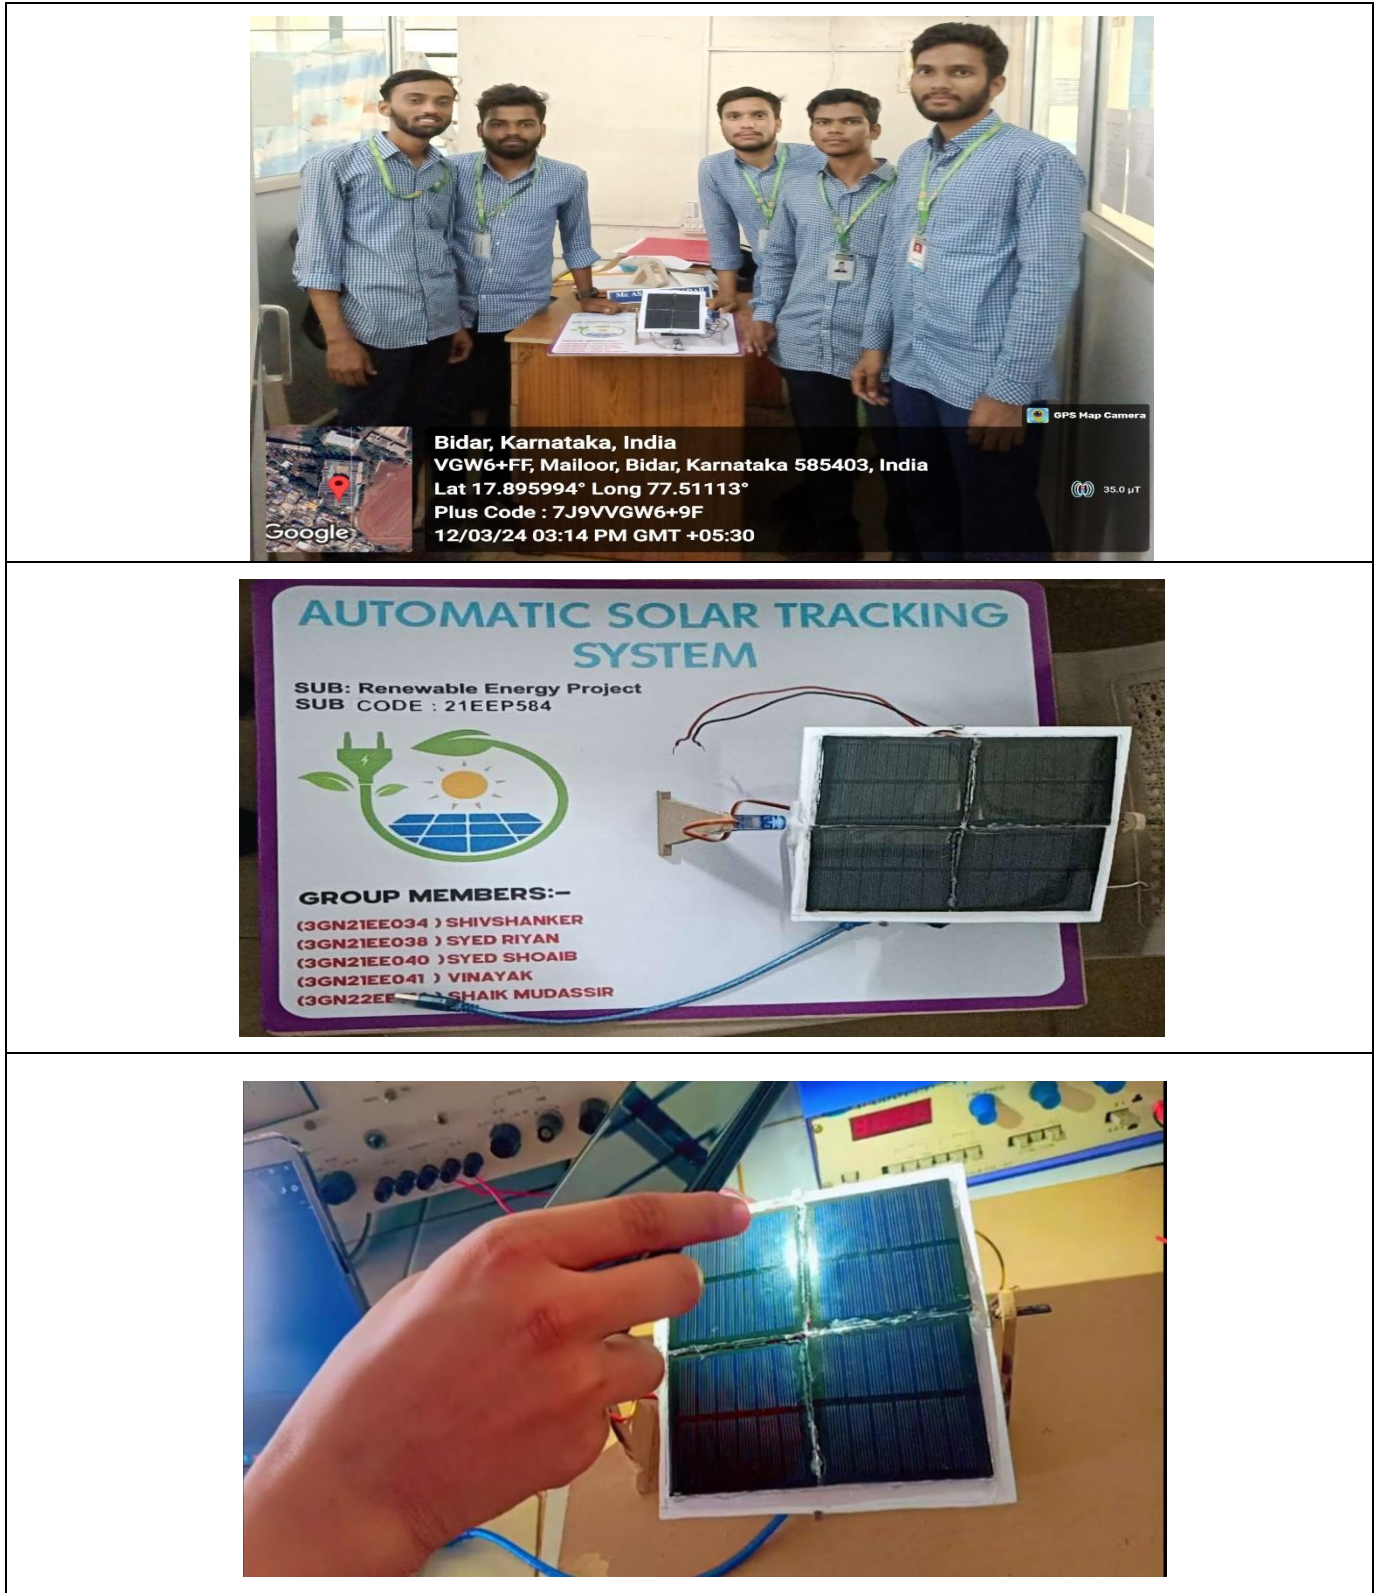

CHAPTER 5: CONCLUSION, FUTURE SCOPE

5.1 CONCLUSION

Today in the world of rampant productivity, energy is the fundamental source upon which the whole civilization is based upon. As it is said that energy can neither be created nor be destroyed and, in that response, it can be signified that it can somehow be stored. The attempt towards making such goal substantiated, this project has been endeavoured towards unravelling the path of such objectivity. It is quite natural that constant utilization of energies somehow opens the door of scarcity as per as earthly sources are concerned. Sun, in the stand of which, the tallest source, spiked over for age's right from the origin of the whole universe, through which life has been conceived, is the basic and the mother source of all the energies. Considering the very fundamental from the viewpoint of storing such energy, the project has been unravelled. Energies other than from the Sun, are the process from which such are been produced through the burning of various materials, involving emission of a large amount of pollution, causing the environment and the atmosphere sick day by day. Fastness and smartness of the world's current behavioural visibility, where easy access of every sphere of life is in need of the acute comfortability, every day is a new challenge of hatching something new and unique which makes an energy to be the ultimatum source behind all the hard work exists. In that regards it would be worthier to reveal that commercialization has boomed its wings to such an extent in the need of money and power that we are somehow present in the pool of acute ignorance of the world's resources scarcity, in consequence of which the whole world is wounded. Healing the world is the basis cultivation with which the hour clock is calling and this project presents the eye, therefore, to open the corridors of reducing the amount of pollution in storing of energy culled out from the Sun and also to make the pace of advancement revved around.

5.2 FUTURE SCOPE

The very embodiment through which the futuristic conundrum be set aside, is the project called “Automatic Solar Tracking System”. A trailblazer by its spirit, this system works in its utmost efficiency, whether that be in terms of its pecuniary ability or in terms of its accessibility. In the smoke of the darkness where pollution engulfing every spheres of advancement as an outcome of producibility, this device in its very efficiency work towards