


- Be lecture notes:

- Mosfets:-

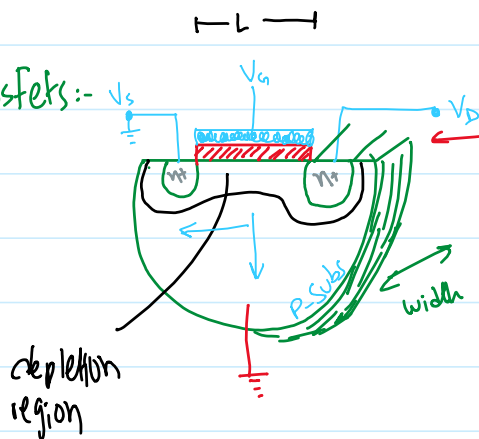


$$I_D \propto V_{GS} - V_{TH}$$

$$I_D \propto V_{DS}$$


$$I_D \propto \frac{1}{L}$$

$$I_D \propto \frac{W}{L} (V_{GS} - V_{TH}) V_{DS} = \mu_n C_{ox} \frac{W}{L} (V_{GS} - V_{TH}) V_{DS}$$

Mobility of e

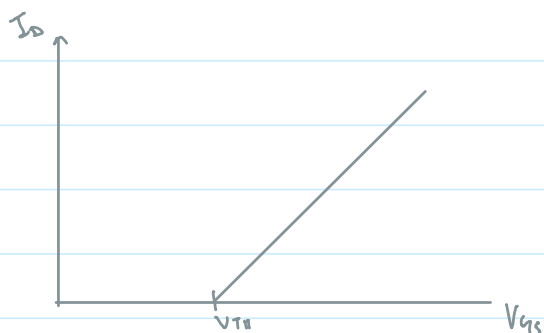

$$C_{lp} = \frac{\epsilon_0 \epsilon_r A}{d}$$

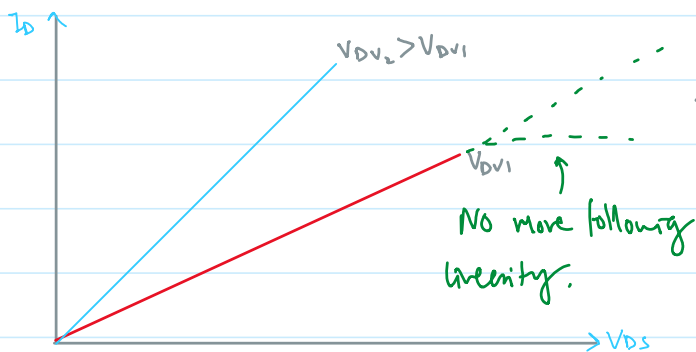

$$I_D = k_n \cdot \frac{W}{L} \cdot V_{ov} \cdot V_{TH} \cdot V_{DS}$$

Transconductance parameter.

Design

Tech