LAB 7 TASK – 23k0055

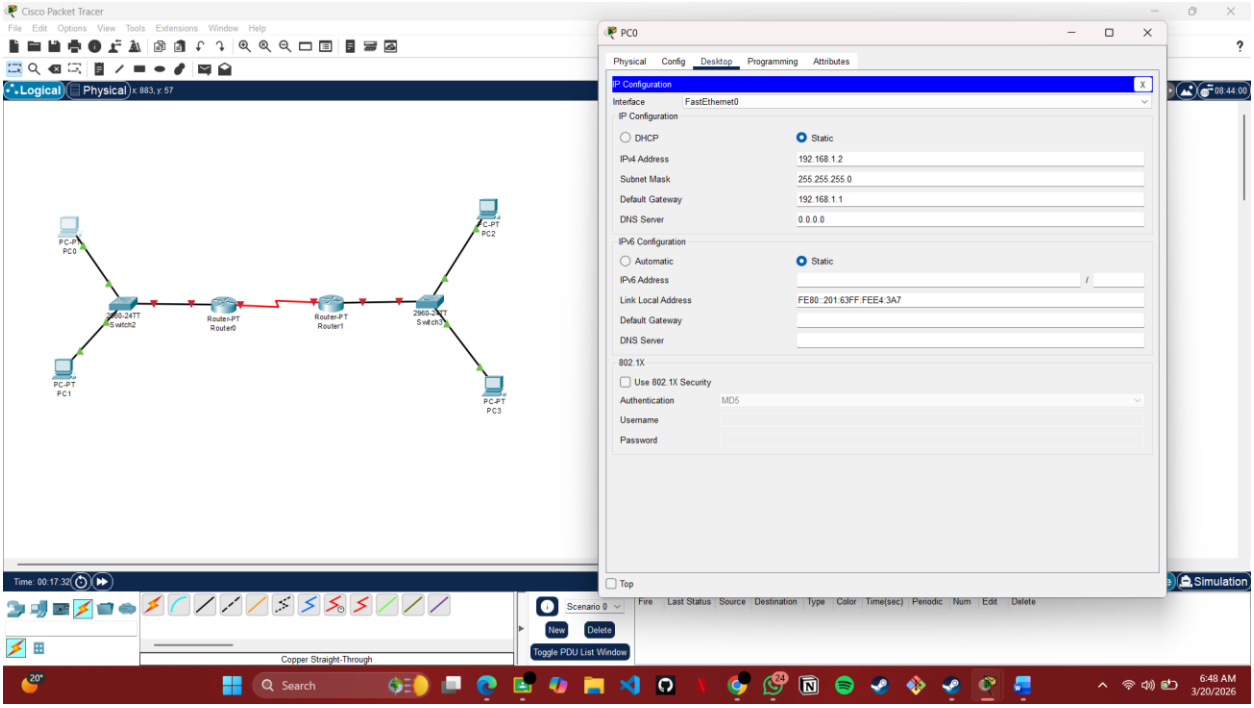

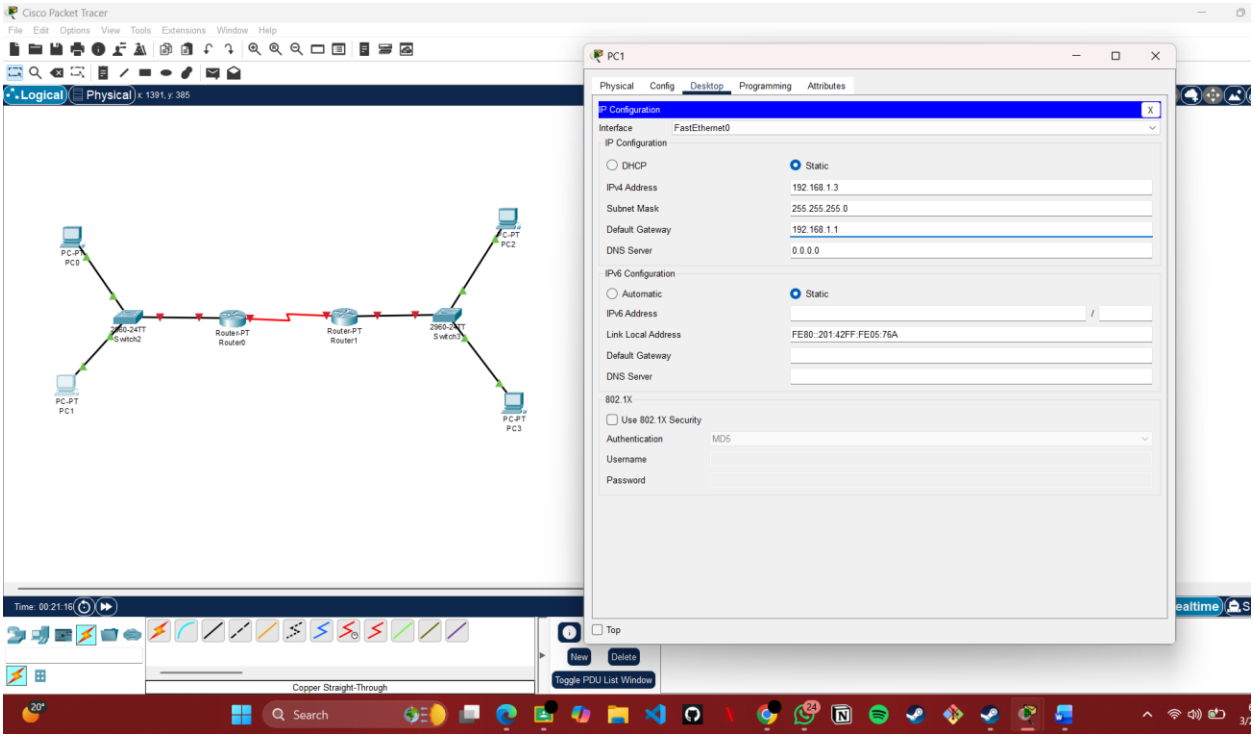

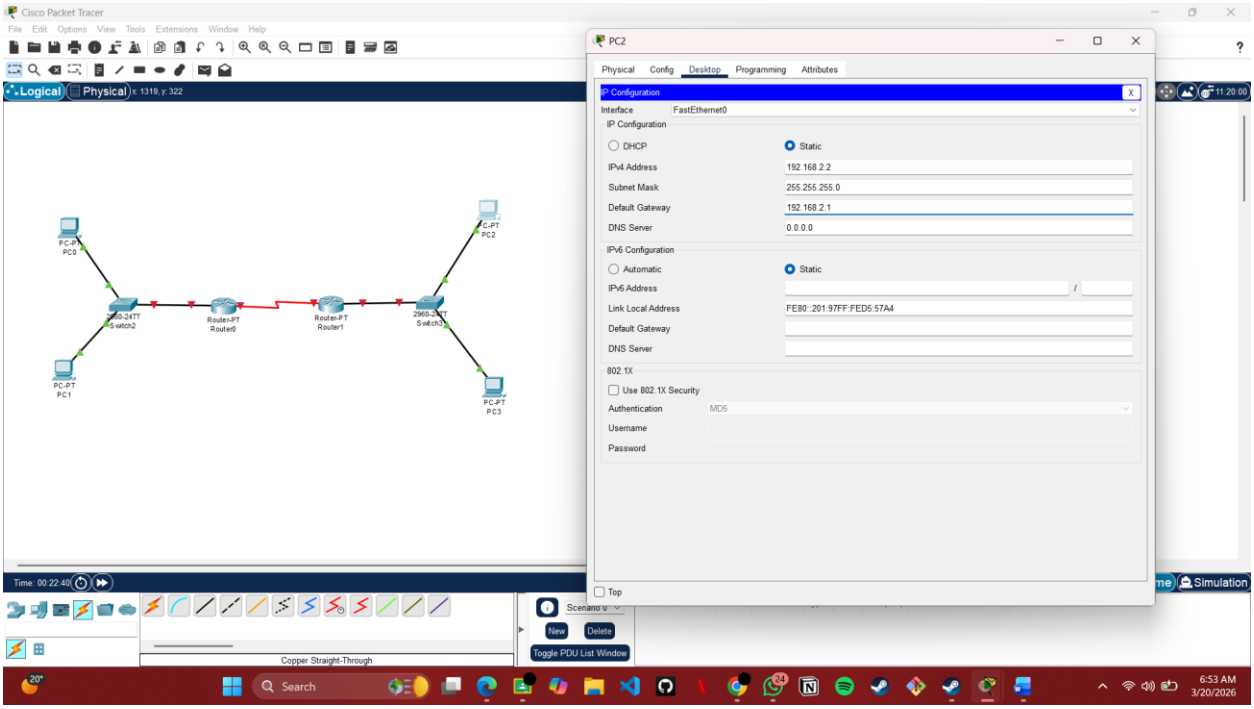
Cisco Packet Tracer
PC2
Physical
Config
Desktop
Programming
Attributes
IP Configuration
Interface
FastEthernet0
IP Configuration
DHCP
Static
IPv4 Address
192.168.2.2
Subnet Mask
255.255.255.0
Default Gateway
192.168.2.1
DNS Server
0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address
Link Local Address
FE80::201:97FF:FED5:57A4
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication
MD5
Username
Password
Top
PC-PT PC0
PC-PT PC1
PC-PT PC2
PC-PT PC3
Router-PT Router0
Router-PT Router1
Copper Straight-Through
Time: 00:22:40
Simulation
New
Delete
Toggle PDU List Window
6:53 AM
3/20/2026

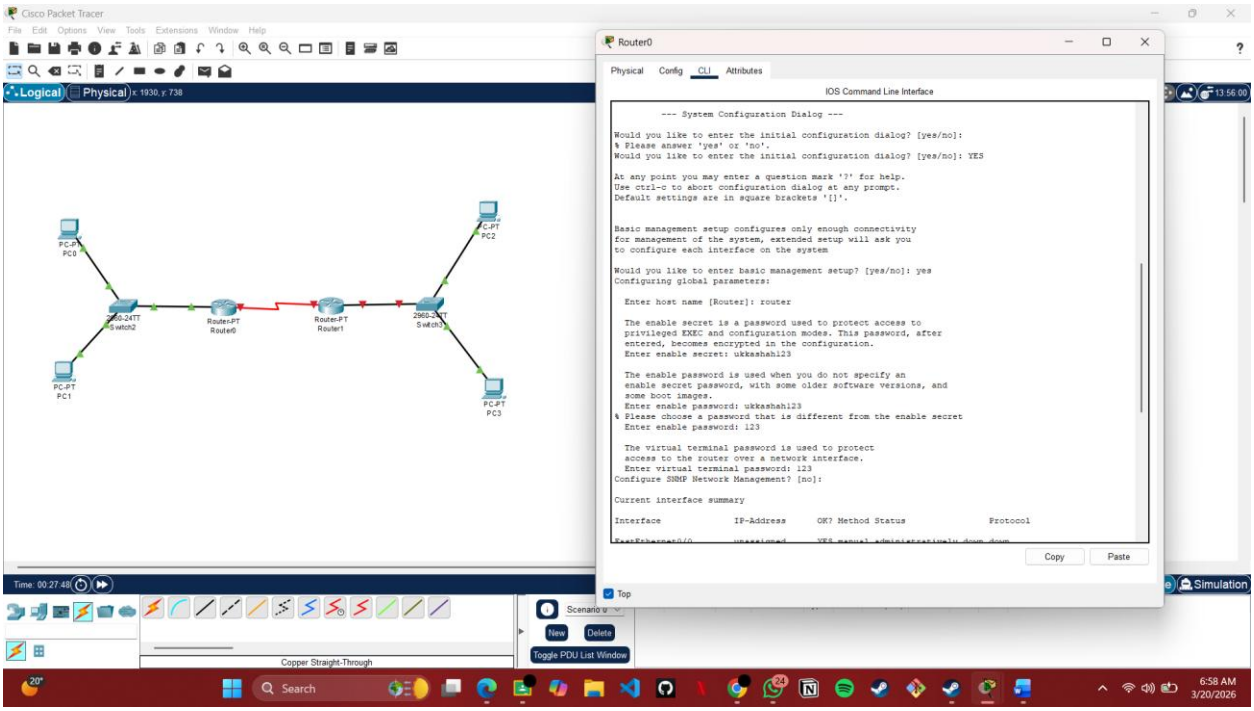
Cisco Packet Tracer
Router0
Physical
Config
CLI
Attributes
IOS Command Line Interface
--- System Configuration Dialog ---
Would you like to enter the initial configuration dialog? [yes/no]:
% Please answer 'yes' or 'no'.
Would you like to enter the initial configuration dialog? [yes/no]: YES
At any point you may enter a question mark '?' for help.
Use ctrl-c to abort configuration dialog at any prompt.
Default settings are in square brackets '[]'.
Basic management setup configures only enough connectivity
for management of the system, extended setup will ask you
to configure each interface on the system
Would you like to enter basic management setup? [yes/no]: yes
Configuring global parameters:
Enter host name [Router]: router
The enable secret is a password used to protect access to
privileged EXEC and configuration modes. This password, after
entered, becomes encrypted in the configuration.
Enter enable secret: ukkashahi23
The enable password is used when you do not specify an
enable secret password, with some older software versions, and
some boot images.
Enter enable password: ukkashahi23
% Please choose a password that is different from the enable secret
Enter enable password: 123
The virtual terminal password is used to protect
access to the router over a network interface.
Enter virtual terminal password: 123
Configure SNMP Network Management? [no]:
Current interface summary
Interface
IP-Address
OK? Method Status
Protocol
Copy
Paste
Top
Time: 00:27:48
Simulation
New
Delete
Toggle PDU List Window
6:58 AM
3/20/2026

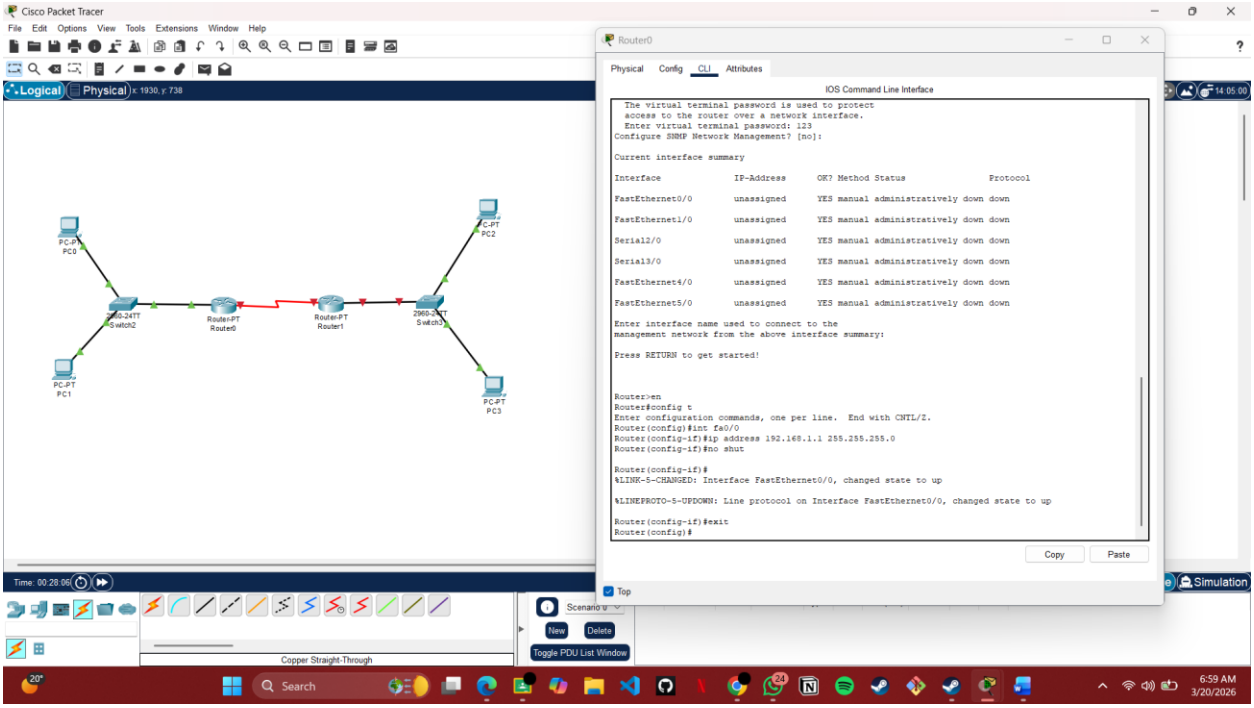
Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Logical
Physical
x: 1930, y: 738
PC-PT PC0
PC-PT PC1
PC-PT PC2
PC-PT PC3
2960-24TT Switch2
Router-PT Router0
Router-PT Router1
2960-24TT Switch3
Time: 00:28:06
Copper Straight-Through
Scenario 0
New
Delete
Toggle PDU List Window
Simulation
Router0
Physical
Config
CLI
Attributes
IOS Command Line Interface
The virtual terminal password is used to protect
access to the router over a network interface.
Enter virtual terminal password: 123
Configure SNMP Network Management? [no]:
Current interface summary
Interface IP-Address OK? Method Status Protocol
FastEthernet0/0 unassigned YES manual administratively down down
FastEthernet1/0 unassigned YES manual administratively down down
Serial2/0 unassigned YES manual administratively down down
Serial3/0 unassigned YES manual administratively down down
FastEthernet4/0 unassigned YES manual administratively down down
FastEthernet5/0 unassigned YES manual administratively down down
Enter interface name used to connect to the
management network from the above interface summary:
Press RETURN to get started!
Router>en
Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#int fa0/0
Router(config-if)#ip address 192.168.1.1 255.255.255.0
Router(config-if)#no shut
Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up
Router(config-if)#exit
Router(config)#
Copy
Paste
Top
Search
6:59 AM
3/20/2026

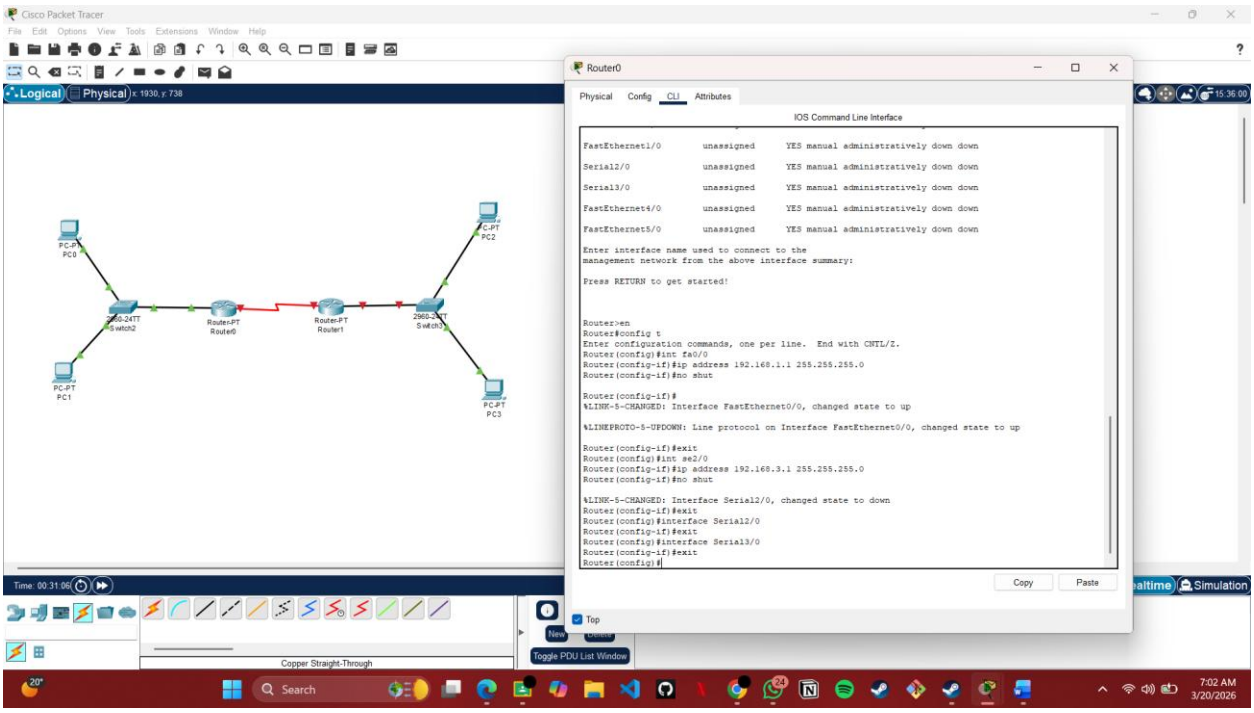
Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Logical
Physical
x: 1930, y: 738
PC-PT PC0
PC-PT PC1
PC-PT PC2
PC-PT PC3
2960-24TT Switch2
Router-PT Router0
Router-PT Router1
2960-24TT Switch3
Time: 00:31:06
Copper Straight-Through
Toggle PDU List Window
Simulation
Router0
Physical
Config
CLI
Attributes
IOS Command Line Interface
FastEthernet1/0 unassigned YES manual administratively down down
Serial2/0 unassigned YES manual administratively down down
Serial3/0 unassigned YES manual administratively down down
FastEthernet4/0 unassigned YES manual administratively down down
FastEthernet5/0 unassigned YES manual administratively down down
Enter interface name used to connect to the
management network from the above interface summary:
Press RETURN to get started!
Router>en
Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#int fa0/0
Router(config-if)#ip address 192.168.1.1 255.255.255.0
Router(config-if)#no shut
Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up
Router(config-if)#exit
Router(config)#int se2/0
Router(config-if)#ip address 192.168.3.1 255.255.255.0
Router(config-if)#no shut
%LINK-5-CHANGED: Interface Serial2/0, changed state to down
Router(config-if)#exit
Router(config)#interface Serial2/0
Router(config-if)#exit
Router(config)#interface Serial3/0
Router(config-if)#exit
Router(config)#
Copy
Paste
Top
Search
7:02 AM
3/20/2026

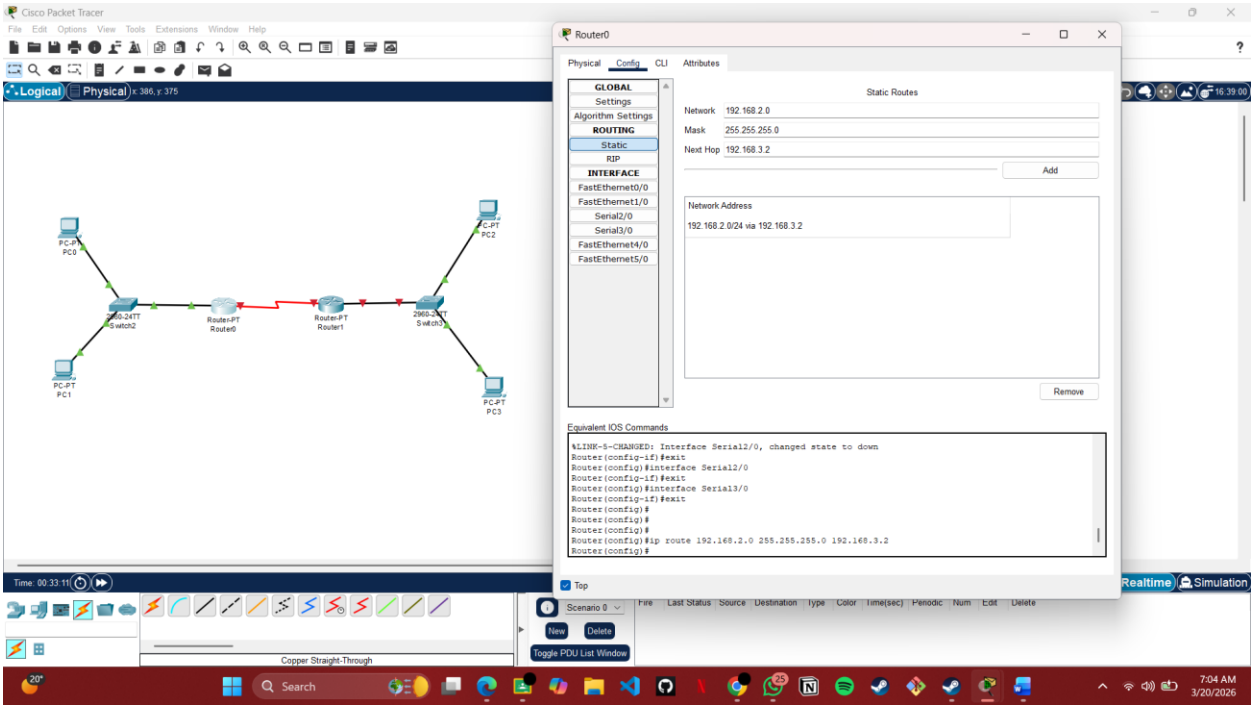
Cisco Packet Tracer
Router0
Physical
Config
CLI
Attributes
GLOBAL
Settings
Algorithm Settings
ROUTING
Static
RIP
INTERFACE
FastEthernet0/0
FastEthernet1/0
Serial2/0
Serial3/0
FastEthernet4/0
FastEthernet5/0
Static Routes
Network 192.168.2.0
Mask 255.255.255.0
Next Hop 192.168.3.2
Add
Network Address
192.168.2.0/24 via 192.168.3.2
Remove
Equivalent IOS Commands
%LINK-5-CHANGED: Interface Serial2/0, changed state to down
Router(config-if)#exit
Router(config)#interface Serial2/0
Router(config-if)#exit
Router(config)#interface Serial3/0
Router(config-if)#exit
Router(config)#
Router(config)#
Router(config)#
Router(config)#ip route 192.168.2.0 255.255.255.0 192.168.3.2
Router(config)#
Top
PC-PT PC0
PC-PT PC1
PC-PT PC2
PC-PT PC3
2960-24TT Switch2
Router-PT Router0
Router-PT Router1
2960-24TT Switch3
Copper Straight-Through
Scenario 0
New
Delete
Toggle PDU List Window
Realtime
Simulation
Search
7:04 AM
3/20/2026

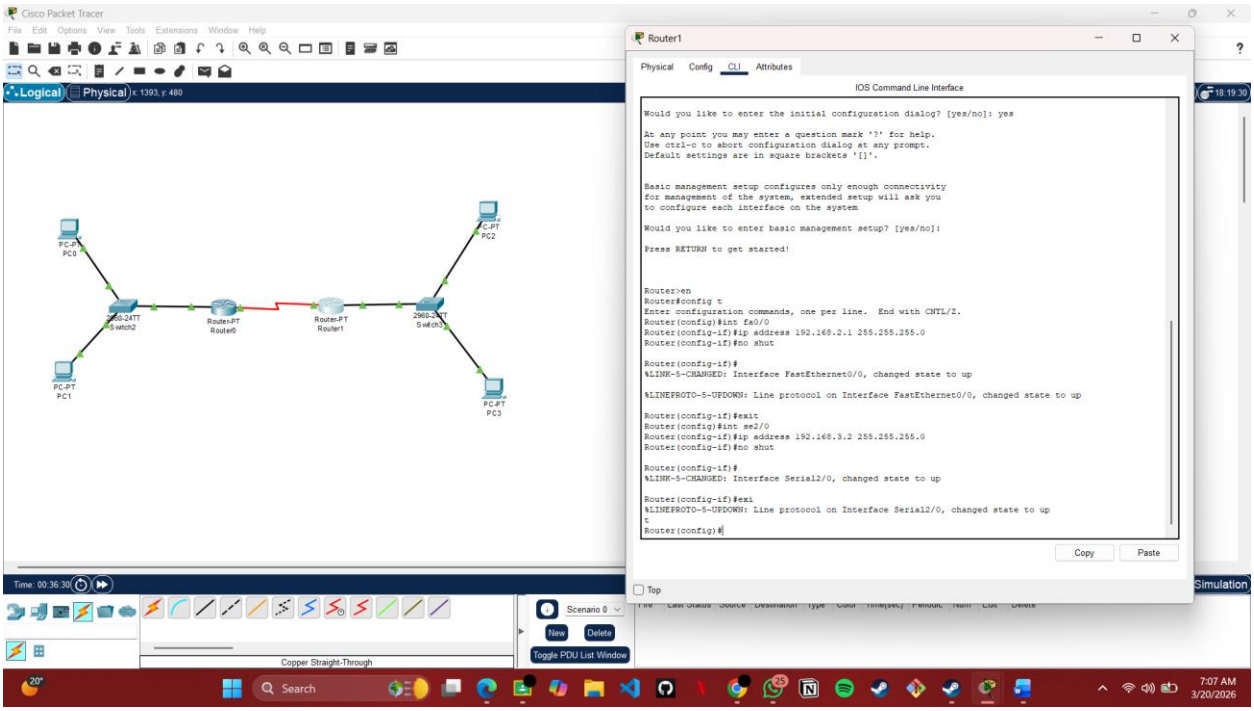
Cisco Packet Tracer
Router1
Physical
Config
CLI
Attributes
IOS Command Line Interface
Would you like to enter the initial configuration dialog? [yes/no]: yes
At any point you may enter a question mark '?' for help.
Use ctrl-c to abort configuration dialog at any prompt.
Default settings are in square brackets '[]'.
Basic management setup configures only enough connectivity
for management of the system, extended setup will ask you
to configure each interface on the system
Would you like to enter basic management setup? [yes/no]:
Press RETURN to get started!
Router>en
Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#int fa0/0
Router(config-if)#ip address 192.168.2.1 255.255.255.0
Router(config-if)#no shut
Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up
Router(config-if)#exit
Router(config)#int se2/0
Router(config-if)#ip address 192.168.3.2 255.255.255.0
Router(config-if)#no shut
Router(config-if)#
%LINK-5-CHANGED: Interface Serial2/0, changed state to up
Router(config-if)#exi
%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial2/0, changed state to up
t
Router(config)#
Copy
Paste
Top
PC-PT PC0
PC-PT PC1
PC-PT PC2
PC-PT PC3
2960-24TT Switch2
Router-PT Router0
Router-PT Router1
2960-24TT Switch3
Copper Straight-Through
Scenario 0
New
Delete
Toggle PDU List Window
Simulation
Search
7:07 AM
3/20/2026

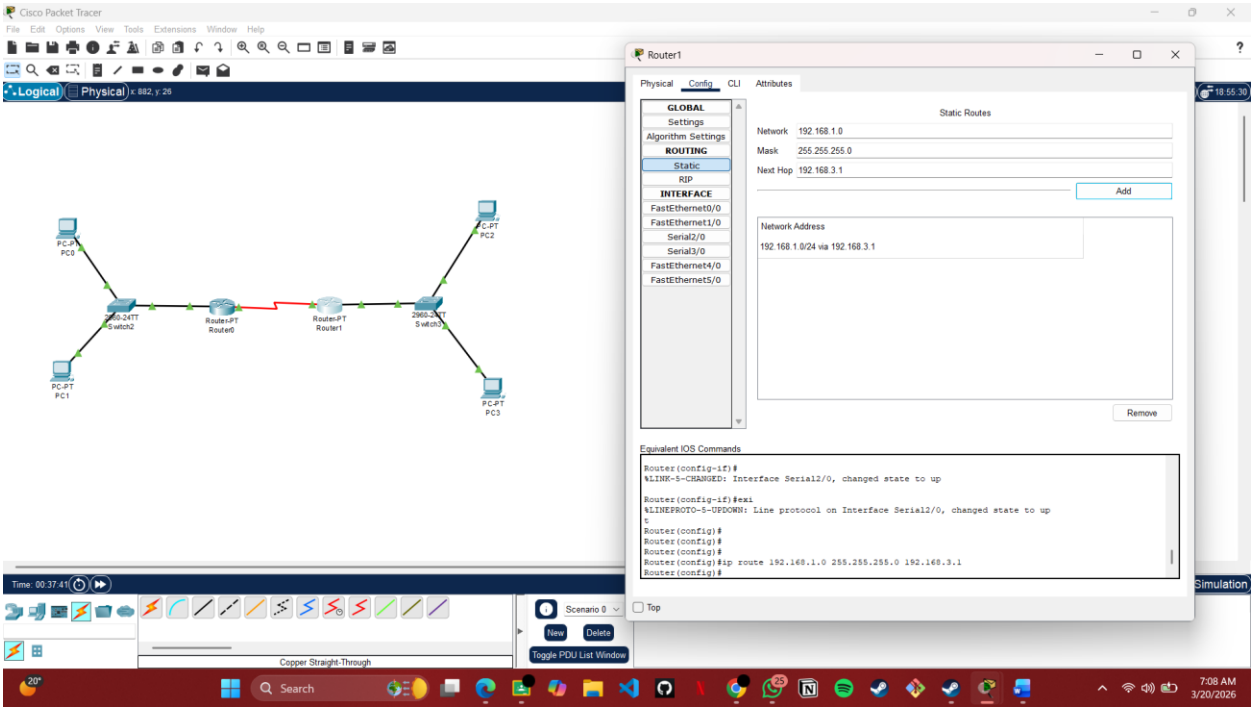
Cisco Packet Tracer
Router1
Physical
Config
CLI
Attributes
GLOBAL
Settings
Algorithm Settings
ROUTING
Static
RIP
INTERFACE
FastEthernet0/0
FastEthernet1/0
Serial2/0
Serial3/0
FastEthernet4/0
FastEthernet5/0
Static Routes
Network 192.168.1.0
Mask 255.255.255.0
Next Hop 192.168.3.1
Add
Network Address
192.168.1.0/24 via 192.168.3.1
Remove
Equivalent IOS Commands
Router(config-if)#
%LINK-5-CHANGED: Interface Serial2/0, changed state to up
Router(config-if)#exi
%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial2/0, changed state to up
t
Router(config)#
Router(config)#
Router(config)#
Router(config)#ip route 192.168.1.0 255.255.255.0 192.168.3.1
Router(config)#
Top
PC-PT PC0
PC-PT PC1
PC-PT PC2
PC-PT PC3
Router-PT Router0
Router-PT Router1
Copper Straight-Through
Scenario 0
New
Delete
Toggle PDU List Window
Simulation

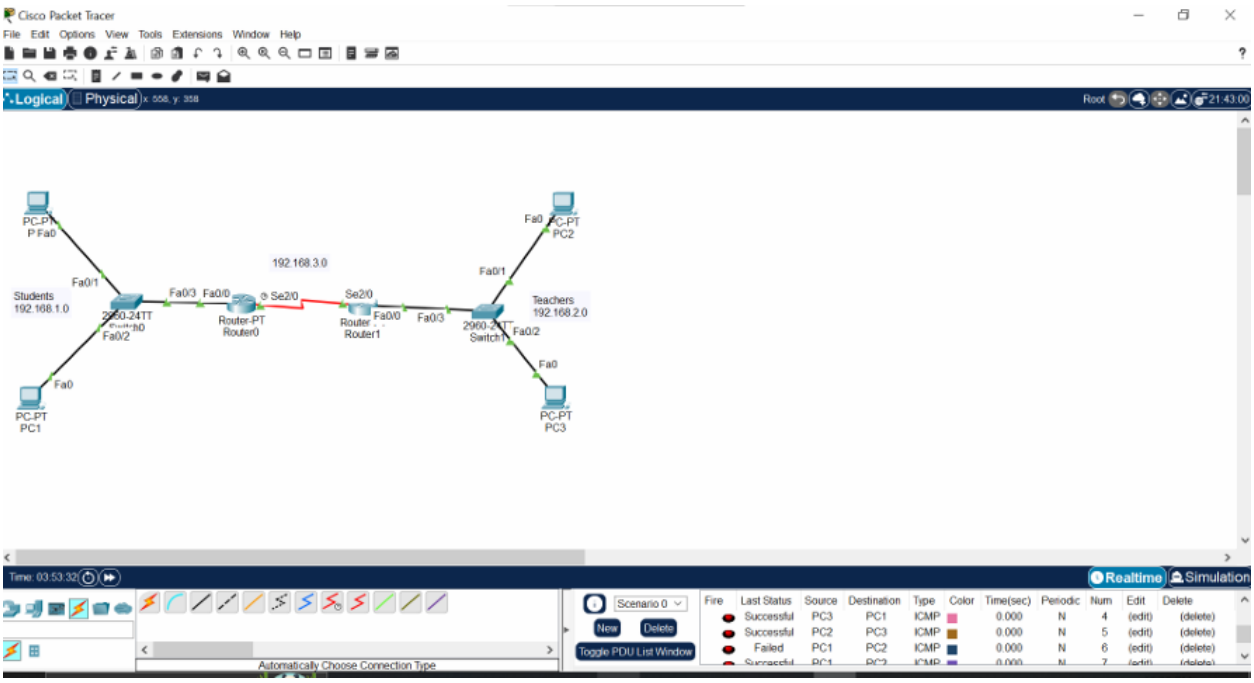
Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Logical
Physical
PC-PT PC0
PC-PT PC1
PC-PT PC2
PC-PT PC3
Fa0
Fa0/1
Fa0/2
Fa0/3
Fa0/0
Se2/0
192.168.3.0
Students
192.168.1.0
Teachers
192.168.2.0
Router-PT Router0
Router Router1
2960-24TT Switch1
Realtime
Simulation
Scenario 0
New
Delete
Toggle PDU List Window
Fire
Last Status
Source
Destination
Type
Color
Time(sec)
Periodic
Num
Edit
Delete
Successful PC3 PC1 ICMP 0.000 N 4 (edit) (delete)
Successful PC2 PC3 ICMP 0.000 N 5 (edit) (delete)
Failed PC1 PC2 ICMP 0.000 N 6 (edit) (delete)
Automatically Choose Connection Type

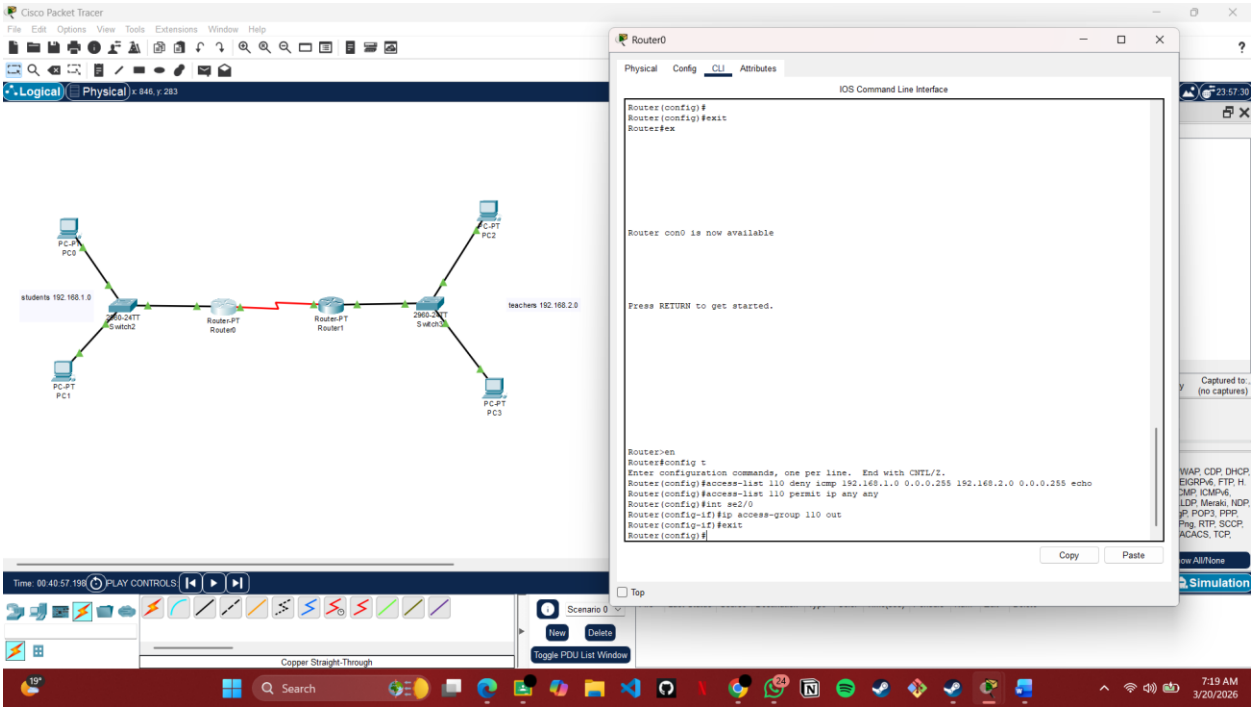
Cisco Packet Tracer
Router0
Physical
Config
CLI
Attributes
IOS Command Line Interface
Router(config)#
Router(config)#exit
Router#ex
Router con0 is now available
Press RETURN to get started.
Router>en
Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#access-list 110 deny icmp 192.168.1.0 0.0.0.255 192.168.2.0 0.0.0.255 echo
Router(config)#access-list 110 permit ip any any
Router(config)#int se2/0
Router(config-if)#ip access-group 110 out
Router(config-if)#exit
Router(config)#
Copy
Paste
students 192.168.1.0
teachers 192.168.2.0
PC-PT PC0
PC-PT PC1
PC-PT PC2
PC-PT PC3
Router-PT Router0
Router-PT Router1
Copper Straight-Through

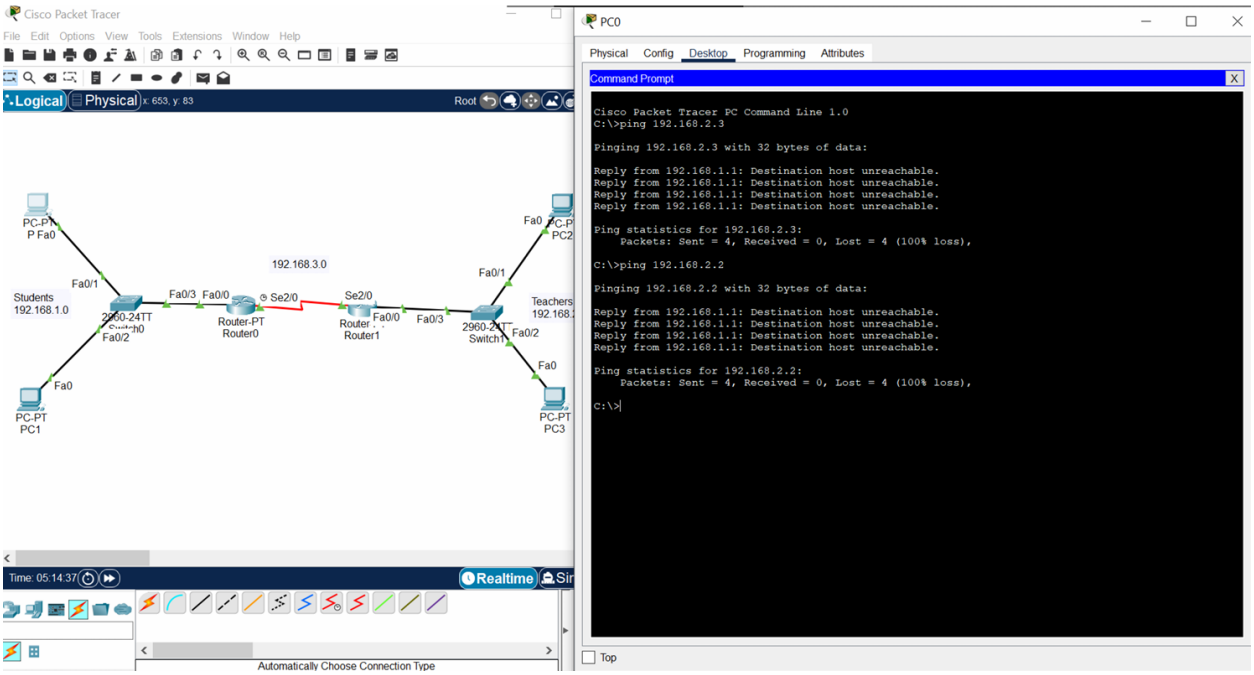
Cisco Packet Tracer
PC0
Physical
Config
Desktop
Programming
Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.2.3
Pinging 192.168.2.3 with 32 bytes of data:
Reply from 192.168.1.1: Destination host unreachable.
Reply from 192.168.1.1: Destination host unreachable.
Reply from 192.168.1.1: Destination host unreachable.
Reply from 192.168.1.1: Destination host unreachable.
Ping statistics for 192.168.2.3:
Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),
C:\>ping 192.168.2.2
Pinging 192.168.2.2 with 32 bytes of data:
Reply from 192.168.1.1: Destination host unreachable.
Reply from 192.168.1.1: Destination host unreachable.
Reply from 192.168.1.1: Destination host unreachable.
Reply from 192.168.1.1: Destination host unreachable.
Ping statistics for 192.168.2.2:
Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),
C:\>
192.168.3.0
Students 192.168.1.0
Router-PT Router0
Router-PT Router1
PC-PT PC1
PC-PT PC2
PC-PT PC3
Automatically Choose Connection Type

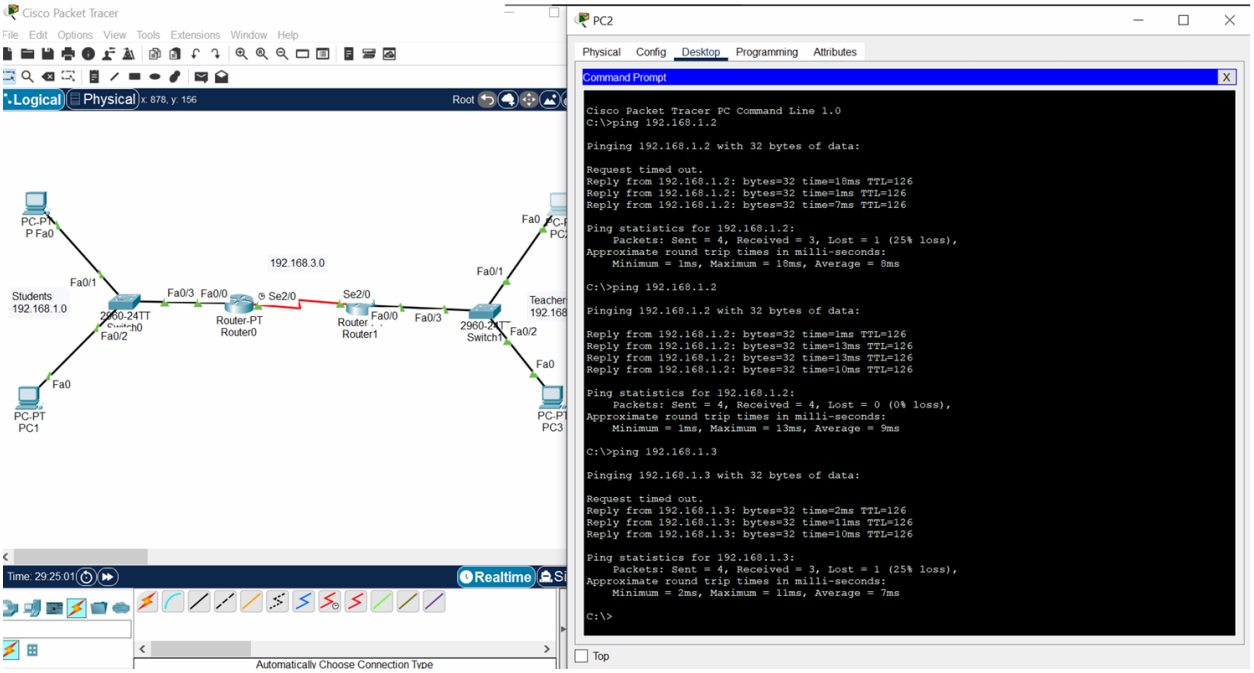
Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Logical Physical x: 878, y: 156
Root
192.168.3.0
Students
192.168.1.0
Teacher
192.168
PC-PT
P Fa0
Fa0/1
Fa0/3 Fa0/0
Se2/0
Se2/0
Fa0/0
Fa0/3
Fa0/1
Fa0/2
Fa0
Fa0
Fa0/2
Fa0
PC-PT
PC1
PC-PT
PC3
Time: 29:25:01
Realtime
Automatically Choose Connection Type
PC2
Physical Config Desktop Programming Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.2
Pinging 192.168.1.2 with 32 bytes of data:
Request timed out.
Reply from 192.168.1.2: bytes=32 time=18ms TTL=126
Reply from 192.168.1.2: bytes=32 time=1ms TTL=126
Reply from 192.168.1.2: bytes=32 time=7ms TTL=126
Ping statistics for 192.168.1.2:
Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
Approximate round trip times in milli-seconds:
Minimum = 1ms, Maximum = 18ms, Average = 8ms
C:\>ping 192.168.1.2
Pinging 192.168.1.2 with 32 bytes of data:
Reply from 192.168.1.2: bytes=32 time=1ms TTL=126
Reply from 192.168.1.2: bytes=32 time=13ms TTL=126
Reply from 192.168.1.2: bytes=32 time=13ms TTL=126
Reply from 192.168.1.2: bytes=32 time=10ms TTL=126
Ping statistics for 192.168.1.2:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 1ms, Maximum = 13ms, Average = 9ms
C:\>ping 192.168.1.3
Pinging 192.168.1.3 with 32 bytes of data:
Request timed out.
Reply from 192.168.1.3: bytes=32 time=2ms TTL=126
Reply from 192.168.1.3: bytes=32 time=11ms TTL=126
Reply from 192.168.1.3: bytes=32 time=10ms TTL=126
Ping statistics for 192.168.1.3:
Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
Approximate round trip times in milli-seconds:
Minimum = 2ms, Maximum = 11ms, Average = 7ms
C:\>
Top

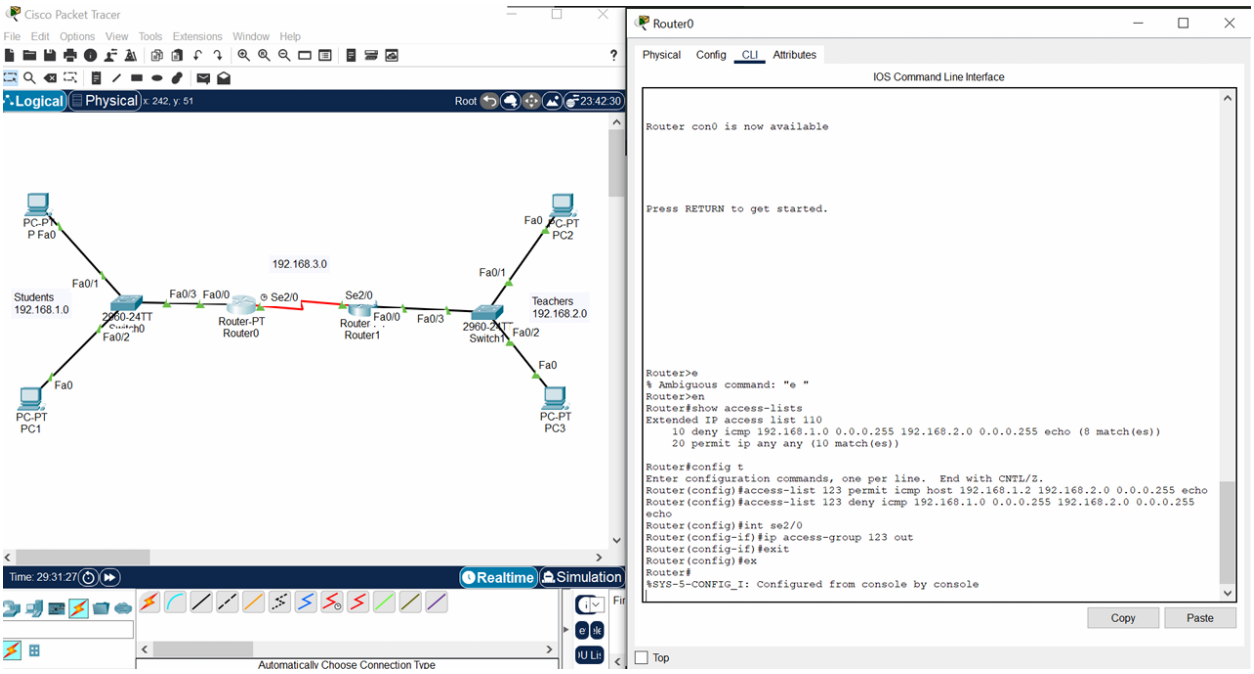
Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Logical Physical x: 242, y: 51
Root
23:42:30
192.168.3.0
Students
192.168.1.0
Teachers
192.168.2.0
PC-PT
P Fa0
Fa0/1
Fa0/3 Fa0/0
Se2/0
Se2/0
Fa0/0
Fa0/3
Fa0/1
Fa0/2
Fa0
Fa0
Fa0/2
Fa0
PC-PT
PC1
PC-PT
PC3
PC-PT
PC2
Time: 29:31:27
Realtime
Simulation
Automatically Choose Connection Type
Router0
Physical Config CLI Attributes
IOS Command Line Interface
Router con0 is now available
Press RETURN to get started.
Router>e
% Ambiguous command: "e "
Router>en
Router#show access-lists
Extended IP access list 110
10 deny icmp 192.168.1.0 0.0.0.255 192.168.2.0 0.0.0.255 echo (8 match(es))
20 permit ip any any (10 match(es))
Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#access-list 123 permit icmp host 192.168.1.2 192.168.2.0 0.0.0.255 echo
Router(config)#access-list 123 deny icmp 192.168.1.0 0.0.0.255 192.168.2.0 0.0.0.255
echo
Router(config)#int se2/0
Router(config-if)#ip access-group 123 out
Router(config-if)#exit
Router(config)#ex
Router#
%SYS-5-CONFIG_I: Configured from console by console
Copy
Paste
Top

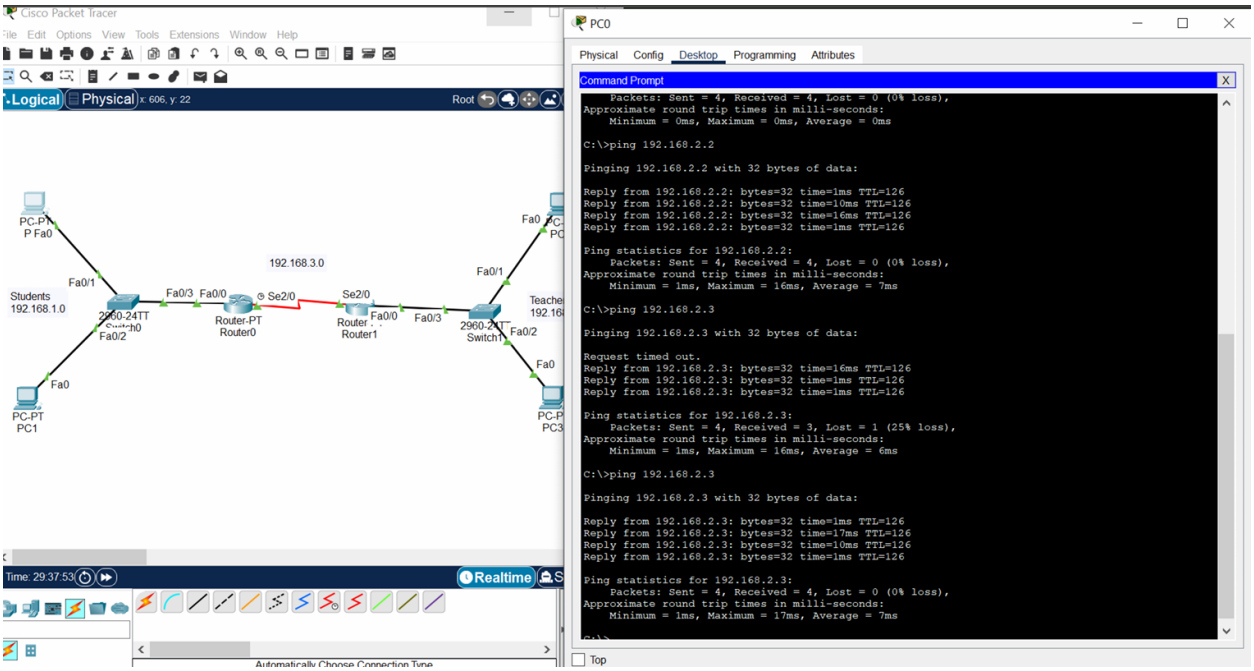
Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Logical Physical x: 606, y: 22
Root
PC-PT
P Fa0
Fa0/1
Students
192.168.1.0
2960-24TT
Switch0
Fa0/2
Fa0
PC-PT
PC1
Fa0/3 Fa0/0
Router-PT
Router0
192.168.3.0
Se2/0
Se2/0
Router
Router1
Fa0/0
Fa0/3
2960-24TT
Switch1
Fa0/1
Fa0/2
Fa0
Time: 29:37:53
Realtime
Automatically Choose Connection Type
PC0
Physical Config Desktop Programming Attributes
Command Prompt
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 0ms, Average = 0ms
C:\>ping 192.168.2.2
Pinging 192.168.2.2 with 32 bytes of data:
Reply from 192.168.2.2: bytes=32 time=1ms TTL=126
Reply from 192.168.2.2: bytes=32 time=10ms TTL=126
Reply from 192.168.2.2: bytes=32 time=16ms TTL=126
Reply from 192.168.2.2: bytes=32 time=1ms TTL=126
Ping statistics for 192.168.2.2:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 1ms, Maximum = 16ms, Average = 7ms
C:\>ping 192.168.2.3
Pinging 192.168.2.3 with 32 bytes of data:
Request timed out.
Reply from 192.168.2.3: bytes=32 time=16ms TTL=126
Reply from 192.168.2.3: bytes=32 time=1ms TTL=126
Reply from 192.168.2.3: bytes=32 time=1ms TTL=126
Ping statistics for 192.168.2.3:
Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
Approximate round trip times in milli-seconds:
Minimum = 1ms, Maximum = 16ms, Average = 6ms
C:\>ping 192.168.2.3
Pinging 192.168.2.3 with 32 bytes of data:
Reply from 192.168.2.3: bytes=32 time=1ms TTL=126
Reply from 192.168.2.3: bytes=32 time=17ms TTL=126
Reply from 192.168.2.3: bytes=32 time=10ms TTL=126
Reply from 192.168.2.3: bytes=32 time=1ms TTL=126
Ping statistics for 192.168.2.3:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 1ms, Maximum = 17ms, Average = 7ms
Top

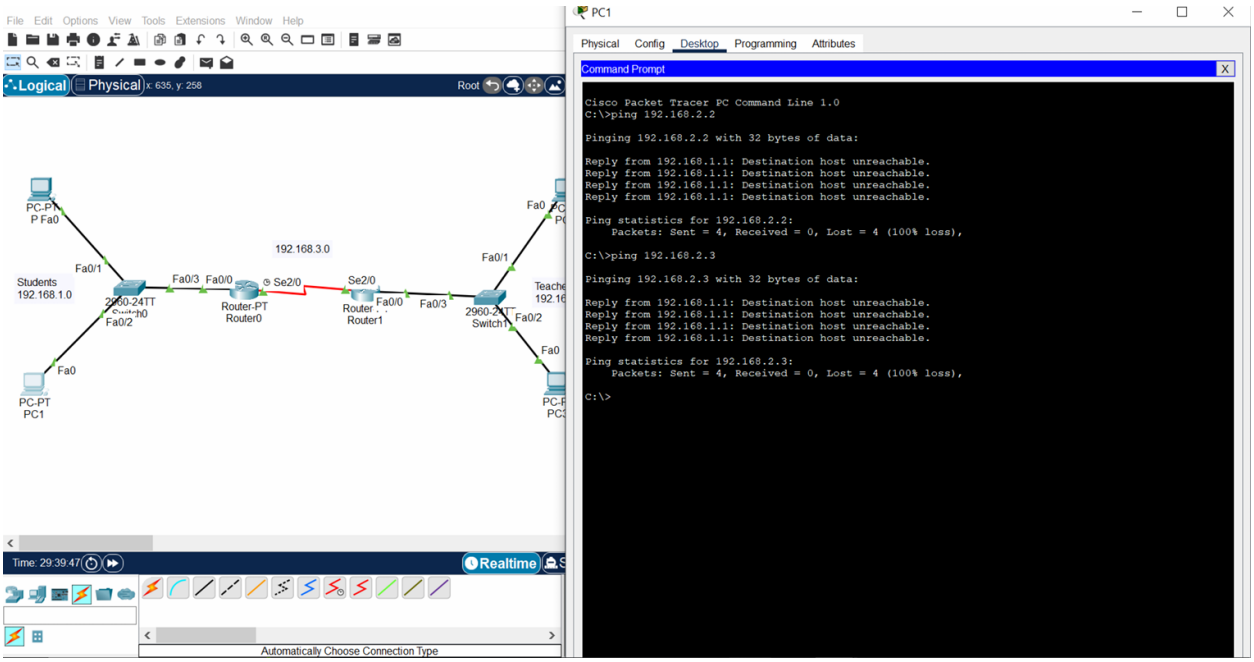
File Edit Options View Tools Extensions Window Help
Logical Physical x: 635, y: 258
Root
PC-PT
P Fa0
Fa0/1
Students
192.168.1.0
2960-24TT
Switch0
Fa0/2
Fa0
PC-PT
PC1
Fa0/3 Fa0/0
Router-PT
Router0
192.168.3.0
Se2/0
Se2/0
Router
Router1
Fa0/0
Fa0/3
2960-24TT
Switch1
Fa0/1
Fa0/2
Fa0
Time: 29:39:47
Realtime
Automatically Choose Connection Type
PC1
Physical Config Desktop Programming Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.2.2
Pinging 192.168.2.2 with 32 bytes of data:
Reply from 192.168.1.1: Destination host unreachable.
Reply from 192.168.1.1: Destination host unreachable.
Reply from 192.168.1.1: Destination host unreachable.
Reply from 192.168.1.1: Destination host unreachable.
Ping statistics for 192.168.2.2:
Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),
C:\>ping 192.168.2.3
Pinging 192.168.2.3 with 32 bytes of data:
Reply from 192.168.1.1: Destination host unreachable.
Reply from 192.168.1.1: Destination host unreachable.
Reply from 192.168.1.1: Destination host unreachable.
Reply from 192.168.1.1: Destination host unreachable.
Ping statistics for 192.168.2.3:
Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),
C:\>

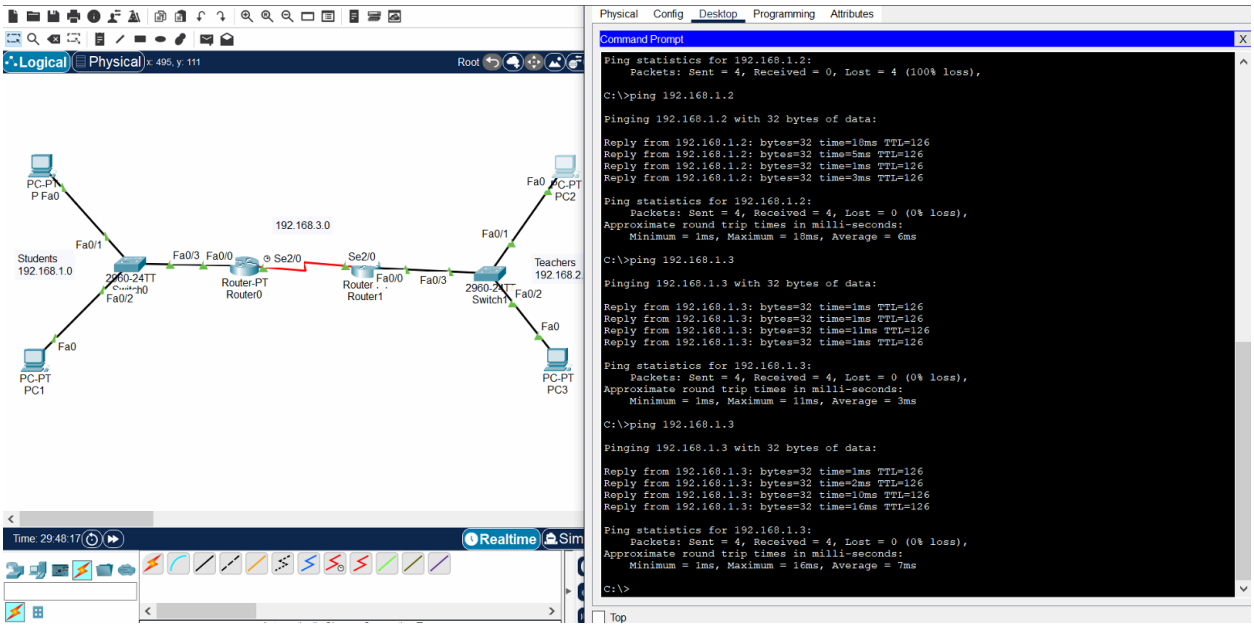
Logical
Physical
x: 495, y: 111
Root
PC-PT
P Fa0
Fa0/1
Students
192.168.1.0
2960-24TT
Fa0/2
Fa0
PC-PT
PC1
Fa0/3
Fa0/0
Router-PT
Router0
Se2/0
192.168.3.0
Se2/0
Router
Router1
Fa0/0
Fa0/3
2960-24TT
Switch1
Fa0/1
Fa0
PC-PT
PC2
Teachers
192.168.2
Fa0/2
Fa0
PC-PT
PC3
Time: 29:48:17
Realtime
Physical
Config
Desktop
Programming
Attributes
Command Prompt
Ping statistics for 192.168.1.2:
Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),
C:\>ping 192.168.1.2
Pinging 192.168.1.2 with 32 bytes of data:
Reply from 192.168.1.2: bytes=32 time=18ms TTL=126
Reply from 192.168.1.2: bytes=32 time=5ms TTL=126
Reply from 192.168.1.2: bytes=32 time=1ms TTL=126
Reply from 192.168.1.2: bytes=32 time=3ms TTL=126
Ping statistics for 192.168.1.2:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 1ms, Maximum = 18ms, Average = 6ms
C:\>ping 192.168.1.3
Pinging 192.168.1.3 with 32 bytes of data:
Reply from 192.168.1.3: bytes=32 time=1ms TTL=126
Reply from 192.168.1.3: bytes=32 time=1ms TTL=126
Reply from 192.168.1.3: bytes=32 time=11ms TTL=126
Reply from 192.168.1.3: bytes=32 time=1ms TTL=126
Ping statistics for 192.168.1.3:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 1ms, Maximum = 11ms, Average = 3ms
C:\>ping 192.168.1.3
Pinging 192.168.1.3 with 32 bytes of data:
Reply from 192.168.1.3: bytes=32 time=1ms TTL=126
Reply from 192.168.1.3: bytes=32 time=2ms TTL=126
Reply from 192.168.1.3: bytes=32 time=10ms TTL=126
Reply from 192.168.1.3: bytes=32 time=16ms TTL=126
Ping statistics for 192.168.1.3:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 1ms, Maximum = 16ms, Average = 7ms
C:\>
Top