LSPU Self-paced Learning Module (SLM)

| Course | Chemistry for Engineers | | |
|---------------------------------|---|--|--|
| Sem/AY | First Semester/2023-2024 | | |
| Module No. | 4 | | |
| Lesson Title | ENTHALPY AND PHASE CHANGE | | |
| Week | 1 | | |
| Duration | 1 | | |
| Date | September25-29, 2023 | | |
| Description of the Lesson | This module discusses enthalpy, endothermic and exothermic reactions, phase changes, state functions, and enthalpy of reactions. It also includes computations involving heat absorbed or released when water undergoes phase changes, standard enthalpy of reaction ΔH_r° using standard enthalpies of formation ΔH_f° of reactants and products (direct method) and using Hess Law (indirect method). | | |

Learning Outcomes

| Intended | Students should be able to meet the following intended learning outcomes: | | | | |
|------------|--|--|--|--|--|
| Learning | Explain relationships among the following: exothermic process and | | | | |
| Outcomes | endothermic process; internal energy (E) and enthalpy (H); Δ H, qv, and qp. | | | | |
| | Analyze the heating curve for water. | | | | |
| | • Explain the energy changes associated with each phase change (ΔH_{vap} , ΔH_{fus}) | | | | |
| | Use heat capacities and heats of fusion and vaporization to calculate the heat | | | | |
| | absorbed or evolved when a water is heated or cooled and undergoes phase changes | | | | |
| | Distinguish between state functions and path functions and identifying examples of each | | | | |
| | • Calculate the standard enthalpy of reaction ΔH_r° using standard enthalpies of formation ΔH_f° of reactants and products (direct method) | | | | |
| | • Calculate the standard enthalpy of reaction ΔH_r° using Hess Law (indirect method) | | | | |
| Targets/ | At the end of the lesson, students should be able to: | | | | |
| Objectives | Discuss the difference between exothermic and endothermic reactions. | | | | |
| | Define internal energy (E), enthalpy (h), ΔH, qv, and qp. | | | | |
| | Explain energy changes with each phase change when water is heated or cooled. | | | | |

LSPU SELF-PACED LEARNING MODULE: CHEMISTRY FOR ENGINEERS

Prepared by: ELLAINE L. CHING



Republic of the Philippines aguna State Polytechnic University

Province of Laguna

Level I Institutionally Accredited

- Compute the total heat absorbed or evolved when a water is heated or cooled and undergoes phase changes
- Differentiate state functions and path functions
- Compute standard enthalpy of reaction ΔH_r° using standard enthalpies of formation ΔH_f° of reactants and products
- Compute the standard enthalpy of reaction ΔH_r° using Hess Law

Student Learning Strategies

| Online Activities |
|--------------------------|
| (Synchronous/ |
| Asynchronous) |

A. Online Discussion via Google Meet

You will be directed to attend in a One-Hour class discussion on Enthalpy and Phase Change. To have access to the Online Discussion. refer to the announcement that will be posted in the Google Classroom.

(For further instructions, refer to your Google Classroom and see the schedule of activities for this module)

- B. Learning Guide Questions:
- 1. What is enthalpy?
- 2. What are the four phase changes of water?
- 3. What are the examples of phase changes?
- 4. What is the difference between the activation energy of exothermic and endothermic reactions?
- 5. Is heat and work a state function?

Note: The insight that you will post on online discussion forum using Learning Management System (LMS) will receive additional scores in class participation.

Lecture Guide

ENTHALPY

Offline Activities (e-Learning/Self-Paced)

By using the definition of internal energy, under constant volume conditions, the change in internal energy equals the heat flow.

$$\Delta E = q + w$$

When gas expands, it does an amount of work equal to P Δ V on its surroundings, but if the expanding gas is our system, we want w to be the work done on the gas, and that will be - $P\Delta V$.

So. we can replace w in the equation:

$$\Delta E = q - P\Delta V$$

If the volume is held constant, $\Delta V = 0$, so the equation becomes

$$\Delta E = qv$$

The equation shows how internal energy is related to heat, where the subscript "v" is added to denote that the equation is correct only under constant volume conditions.

When heat flow under constant pressure condition, the function is known as enthalpy, is defined as

$$H = E + PV$$

Enthalpy (H) is used to quantify the heat flow into or out of a system in a process that occurs at constant pressure.

From this definition, the change in enthalpy (ΔH) will be equal to the heat flow under constant pressure conditions. The change in enthalpy (ΔH) must be

$$\Delta H = \Delta E + \Delta (PV)$$

Expand by substituting for $\Delta E = q - P\Delta V$

$$\Delta H = (q - P\Delta V) + \Delta (PV)$$

If pressure is held constant, then the $\Delta(PV)$ term will simply become $P\Delta V$

$$\Delta H = q - P\Delta V + P \Delta V$$

$$\Delta H = q - P\Delta V + P \Delta V$$


$$\Delta H = qp$$

Enthalpy change therefore equals the heat flows under constant pressure, denoted by the subscript "p".


For a process at constant volume, the measurable heat flow is equal to ΔE , the change in internal energy. For a process at constant pressure, the measurable heat flow is equal to the change in enthalpy, ΔH .

$$\Delta H = H_{\text{final}} - H_{\text{initial}}$$

When heat evolves from a system....



If $\Delta H < 0$, then $q_p < 0$ The reaction is <u>Exothermic</u>. Heat goes from the system into the surroundings.



If $\Delta H > 0$, then $q_p > 0$ The reaction is Endothermic. Heat goes from the surroundings into the system.

Phase Diagrams

A **phase diagram** is a graph of pressure versus temperature that shows in which phase a substance will exist under different conditions of temperature and pressure.

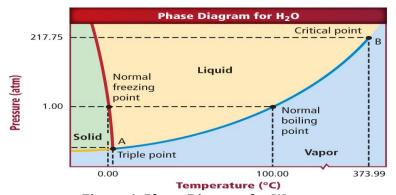


Figure 1. Phase Diagram for Water

The triple point (fig. 1) is the point on a phase diagram that represents the temperature and pressure at which all three phases of a substance can coexist.

The phase diagram for different substances are different from water.

This type of graph is called a heating curve because it shows the temperature change of water as thermal energy, or heat, is added.

Republic of the Philippines

aguna State Polytechnic University

Province of Laguna

Level I Institutionally Accredited

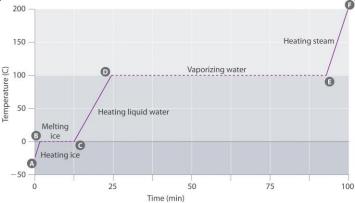



Figure 2. Heating Curve for Water

Notice the two areas on the graph where the temperature does not change.

At 0°C, ice is melting.

At 100°C, water vaporizes.

Heating and cooling curve for water heated at a constant rate

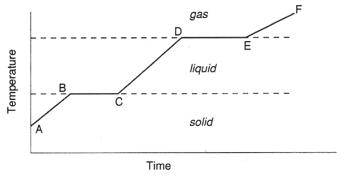

Analysis of a Heating Curve

Looking from left to right on the graph, there are five distinct parts to the heating curve:

- 1. $\mathbf{A} \rightarrow \mathbf{B} = \mathbf{solid}$ ice. Solid ice is heated and the temperature increases until the normal freezing/melting point of zero degrees Celsius is reached. The amount of heat added, q, can be computed by $\mathbf{q} = \mathbf{m} C_{H_2O(solid)} \Delta T$, where m is the mass of the sample of water, C is the specific heat capacity of solid water, or ice, and ΔT is the change in temperature during the process.
- 2. $\mathbf{B} \rightarrow \mathbf{C} = \mathbf{Solid}$ starts to change state from solid to liquid. The first phase change is melting; as a substance melts, the temperature stays the same. For water, this occurs at 0 °C. The above equation (described in part 1 of the curve) cannot be used for this part of the curve because the change in temperature is zero. Instead, use the heat of fusion (ΔH_{fusion}) to calculate how much heat was involved in that process: $\mathbf{q} = \mathbf{m} \cdot \Delta \mathbf{H}_{fusion}$, where m is the mass of the sample of water.

$H_2O_{(s)} \rightarrow H_2O_{(t)}$ energy required $\cong 6.01 \text{ kJ/mol}$

- 3. $C \rightarrow D$ = temperature starts to rise once all the solid has melted. After all of the solid substance has melted into liquid, the temperature of the liquid begins to increase as heat is absorbed. It is then possible to calculate the heat absorbed by $q = mC_{H_2O(l)}\Delta T$. Note that the specific heat capacity of liquid water is different than that of ice.
- 4. D→E = Liquid starts to vaporize, turning from liquid to gas. The liquid will begin to boil when enough heat has been absorbed by the solution that the temperature reaches the boiling point, where again, the temperature remains constant until all of the liquid has become gaseous water. At the atmospheric pressure of 1 atm, this phase transition occurs at 100°C (the normal boiling point of water). Liquid water becomes water vapor or steam when it enters the gaseous phase. Use the heat of vaporization (ΔH_{vap}) to calculate how much heat was absorbed in this process: q=m·ΔH_{vap}, where m is the mass of the sample of water.

$$H_2O_{(t)} \rightarrow H_2O_{(g)}$$
 energy required $\cong 40.67 \text{ kJ/mol}$

- 5. **E-F = temperature starts to rise once all liquid is vaporized.** After all of the liquid has been converted to gas, the temperature will continue to increase as heat as added. Again, the heat added that results in a certain change temperature is given by: $q = mC_{H_2O(gas)}\Delta T$. Note that the specific heat capacity of gaseous water is different than that of ice or liquid water.
- 6. Water has a high boiling point because of the presence of extensive hydrogen bonding interactions between the water molecules in the liquid phase (water is both a strong hydrogen bond donor and acceptor). When heat is first applied to water, it must break the intermolecular hydrogen bonds within the sample. After breaking the bonds, heat is then absorbed and converted to increased kinetic energy of the molecules in order to vaporize them.

Phase Changes

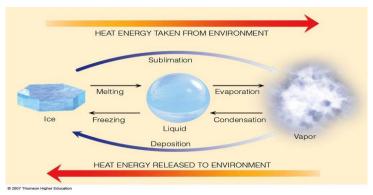


Figure 3. Changes of State of Water

Melting occurs when heat flows into a solid object. The melting point of a crystalline solid is the temperature at which the forces holding the crystal lattice together are broken and it becomes a liquid.

Sublimation is when a solid phase goes directly into a gaseous phase without first becoming a liquid.

Deposition is the process by which a gas or vapor changes directly to a solid, and is the reverse of sublimation.

Frost is an example of deposition.

Snowflakes are also formed in the upper atmosphere by deposition of ice crystals.

Freezing, or solidification, is a phase transition in which liquid turns into a solid when its temperature is lowered to or below its freezing point

Condensation is the process by which a gas or vapor becomes a liquid.

Condensation is the reverse of evaporation.

Vaporization is a phase transition from the liquid phase to the gas phase.

Fusion is when a solid melt to form a liquid

Energy Changes Accompanying Phase Changes

Sublimation: Δ Hsub > 0 (endothermic).

Vaporization: $\Delta \text{Hvap} > 0$ (endothermic).

Melting or Fusion: Δ Hfus > 0 (endothermic).

Deposition: $\Delta \text{Hdep} < 0$ (exothermic).

Condensation: Δ Hcon < 0 (exothermic).

Freezing: Δ Hfre < 0 (exothermic).

Generally, heat of fusion (enthalpy of fusion) is less than heat of vaporization:

It takes more energy to completely separate molecules, than partially separate them. It takes more energy to vaporize water than to melt it. This is because in melting you weaken the intermolecular forces. Here about 1/6 of the hydrogen bonds are broken. In vaporization you totally break them. All the hydrogen bonds are broken

 ΔH_{vap} is always greater than ΔH_{fus}

Values of ΔH

LSPU SELF-PACED LEARNING MODULE: CHEMISTRY FOR ENGINEERS Prepared by: ELLAINE L. CHING

Republic of the Philippines

aguna State Polytechnic University

Province of Laguna

Level I Institutionally Accredited

| | kJ/mol | kJ/kg | Kcal/kg |
|-----------------|--------|-------|---------|
| ΔH fusion | 6.01 | 334 | 79.6 |
| ΔH vaporization | 40.67 | 2258 | 539.2 |

Sample Problems

Example 1. Calculate the amount of energy needed to convert 55.0 grams of ice to all liquid water at its normal melting point.

Solution:

$$\Delta H = \max x \Delta H_{fus}$$

 $\Delta H = (55.0 \text{ g})(334 \text{ J/g})$
 $\Delta H = 18400 \text{ J}$

Example 2. Using the same amount of water calculate the energy needed to completely vaporize the water at its normal boiling point.

Solution:

$$\Delta H = \max x \Delta H_{vap}$$

 $\Delta H = (55.0 \text{ g})(2258 \text{ J/g})$
 $\Delta H = 124190 \text{ J}$

Why is there such a large difference in energy needed?

Answer: because more energy is needed to completely break the bonds

Example 3. How much energy is required to heat 25 g of liquid water from 25°C to 100°C and change it to steam? Solution:

$$\Delta H_1 = mC_p \Delta T$$

$$\Delta H_1 = 25g \times 4.186 \frac{J}{g^{\circ}C} \times (100 - 25)^{\circ}C$$

$$\Delta H_1 = 7.848.75 \text{ J or } 7.848 \text{ kJ}$$

To solve for n= number of moles

$$n=25g imesrac{1mol}{18.02g}=1.387mol$$

$$\Delta H_2=n imes\Delta H_{vap}$$


$$\Delta H_2=1.387mol imes40.67rac{kJ}{mol}$$

$$\Delta H_2=56.409~\mathrm{kJ}$$

$$\Delta H_{total} = \Delta H_1 + \Delta H_2$$
 $\Delta H_{total} = 7.848 \, kJ + 56.409 \, kJ$
 $\Delta H_{total} = 64.257 \, kJ$

Example 4. Calculate the total amount of heat absorbed (in kJ) when 2.00 mol of ice at -30.0°C is converted to steam at 140.0°C

Solution:

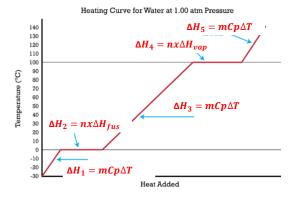

$$\Delta H_{total} = \Delta H_1 + \Delta H_2 + \Delta H_3 + \Delta H_4 + \Delta H_5$$

To get the mass of water given the number of moles

Mass of
$$H_2O = 2.00 \text{ mol } H_2Ox \frac{18.02 \text{ g H}_2O}{1 \text{ mol H}_2O} = 36.04 \text{ g}$$

Compute for ΔH_1

$$\Delta H_1 = mC_p \Delta T$$

$$\Delta H_1$$
 = 36.04 $g \times$ 2.100 $\frac{J}{g \, {}^{\circ}\mathsf{C}} \times (0 - (-30)) \, {}^{\circ}\mathsf{C}$

$$\Delta H_1 = 2,270.52 \text{ J} \approx 2.270 \text{ kJ}$$

Compute for ΔH_2

$$\Delta H_2 = n \Delta H_{fus}$$

$$\Delta H_2 = 2.00 \text{mol} \times 6.01 \frac{kJ}{mol}$$

$$\Delta H_2 = 12.02 \text{ kJ}$$

Compute for ΔH_3

$$\Delta H_3 = mC_p \Delta T$$

$$\Delta H_3 = 36.04g \times 4.186 \frac{J}{g^{\circ}C} \times (100 - 0)^{\circ}C$$

$$\Delta H_3 = 15,086.344 \text{ J} = 15.086 \text{ kJ}$$

Compute for ΔH_4

$$\Delta H_4 = n \times \Delta H_{van}$$

$$\Delta H_4 = 2.00 mol \times 40.67 \frac{kJ}{mol}$$

$$\Delta H_4 = 81.34 \text{ kJ}$$

Compute for ΔH_5

$$\Delta H_5 = mC_p \Delta T$$

$$\Delta H_5$$
 = 36.04 $g \times$ 2.010 $\frac{J}{g^{\circ}C} \times (140 - 100)^{\circ}C$

$$\Delta H_5 = 2,897.616 \text{ J} \approx 2.897 \text{ kJ}$$

Computing for ΔH_{total}

$$\Delta H_{total} = \Delta H_1 + \Delta H_2 + \Delta H_3 + \Delta H_4 + \Delta H_5$$

$$\Delta H_{total} = 2.270 + 12.02 + 15.086 + 81.34 + 2.897$$

$$\Delta H_{total} = 113.613 \text{ kJ}$$

*** The total heat absorbed as the ice at -30°C is heated to steam at 140°C is 113.613 kJ. The largest absorption of heat comes during the vaporization of the liquid water.

HEATS OF REACTIONS

Heat of reaction is the change in enthalpy during a reaction symbolized as ΔH_{rxn} .

$$\Delta H_{rxn} = H_{final} - H_{initial}$$

$$\Delta H_{rxn} = H_{products} - H_{reactants}$$

Activation Energy

The energy required to break the bonds in the reactants for a chemical reaction to occur.

Endothermic and Exothermic Reactions


Endothermic – more energy is taken in to break the bonds in the reactants than released by the bonds being formed in the products. Therefore, energy is absorbed.

^{**}The enthalpy change is commonly referred to as the heat of reaction

Republic of the Philippines Laguna State Bolytechnic University


Province of Laguna

Level I Institutionally Accredited



Reactants + **Heat** → Products

Exothermic – More energy is released when the products where formed than energy was used to break bonds in the reactants. Therefore, a net release of energy.



Reactants → Products + **Heat**

***A reaction is <u>EXOTHERMIC</u> if more energy is **RELEASED** than **SUPPLIED**. If more energy is **SUPPLIED** than is **RELEASED** then the reaction is <u>ENDOTHERMIC</u>

Enthalpy and enthalpy changes

Enthalpy (*H*) is a state function defined as

$$H = E + PV$$

At constant pressure

$$q_p = \Delta H$$

Enthalpy of reaction

$$\Delta H_{rxn} = \Delta H_{product} - \Delta H_{reactant}$$

 ΔH is + for endothermic changes.

 ΔH is – for exothermic changes.

A **<u>state function</u>** is a variable whose value depends only on the state of the system and not on its history. State functions do not depend on the path by which the system arrived at its present state.

Mass, pressure, density, energy, temperature, volume, enthalpy, entropy, Gibbs free energy and chemical composition are all examples of state functions in thermochemistry

Is heat and work a state function?

Heat and work, unlike temperature, pressure, and volume, are not intrinsic properties of a system. They have meaning only as they describe the transfer of energy into or out of a system. They appear only when there occurs any change in the state of system and the surroundings.

Work can't be a state function because it is proportional to the distance an object is moved, which depends on the path used to go from the initial to the final state. If the system process happens at constant volume then there is no work done on the surroundings and the heat change must be a state function $\Delta E = q_v$

Thermochemical Equations

Equations that represent both mass and enthalpy changes

$$H_2O_{(s)} \to H_2O_{(l)}$$
 $\Delta H = + 6.01 \text{ kJ/mol}$

This is an endothermic process. It requires 6.01 kJ to melt one mole of ice, $H_2O(s)$.

The enthalpy value will change if the number of moles varies from the 1:1 reaction stoichiometry.

$$CH_4(g) + 2O_2(g) \longrightarrow CO_2(g) + 2H_2O(l)$$
 $\Delta H = -890.4 \text{ kJ/mol}$

This is an exothermic process. It releases $890.4\ kJ$ when one mole of methane, CH_4 , reacts

The enthalpy value will change if the number of moles varies from the 1:2:1:2 reaction stoichiometry.

Thermochemical equation guidelines:

Always specify state of reactants and products.

$$\mathit{CH}_{4(g)} + 2O_{2(g)} \to \ \mathit{CO}_{2(g)} + 2H_2O_{(l)}$$

(g)- gaseous state, (l)- liquid state, (s)- solid state, (aq)- aqueous state

• When multiplying an equation by a factor (n), multiply the ΔH value by same factor.

$$2CH_{4(g)} + 4O_{2(g)} \rightarrow 2CO_{2(g)} + 4H_2O_{(l)} \quad \Delta H = 2(-890.4 \text{ kJ})$$

$$\Delta H = -1780.8 \text{ kJ}$$

• Reversing an equation changes the sign but not the magnitude of the ΔH .

$$CH_{4(g)} + 2O_{2(g)} \rightarrow CO_{2(g)} + 2H_2O_{(l)}$$
 $\Delta H = -890.4 \ kJ$
 $CO_{2(g)} + 2H_2O_{(l)} \rightarrow CH_{4(g)} + 2O_{2(g)}$ $\Delta H = +890.4 \ kJ$



• 1 mole of $O_{2(g)}$ as the product and oxygen in its standard state as the reactant. But because the standard state of oxygen is $O_{2(g)}$, the formation reaction is really no reaction at all:

$$O_{2(g)} \rightarrow O_{2(g)}$$
 $\Delta H^{\circ} = \Delta H_f^{\circ} [O_{2(g)}] = 0$

The formation reaction for carbon monoxide is

$$C_{(s)} + \frac{1}{2}O_{2(g)} \to CO_{(g)} \quad \Delta H^{\circ} = \Delta H_f^{\circ}[CO_{(g)}]$$

Because we require just 1 mole of CO on the right-hand side, we must use a fractional coefficient on the O_2 to balance the equation, even though this may look odd.

• Two very common errors when writing formation reactions :

$$\begin{split} &C_{(s)} + O_{(g)} \rightarrow CO_{(g)} & \Delta H^{\circ} \neq \Delta H_{f}^{\circ}[CO_{(g)}] \\ &2C_{(s)} + O_{2(g)} \rightarrow 2CO_{(g)} & \Delta H^{\circ} \neq \Delta H_{f}^{\circ}[CO_{(g)}] \end{split}$$

Although both are valid chemical equations, they do not describe the formation reaction for CO. The first reaction is not correct because oxygen is not shown in its standard state, as a diatomic molecule. The second reaction is not correct, because 2 moles of carbon monoxide are formed. Formation reactions are quite useful for determining heats of reaction.

Standard reaction enthalpy, ΔH°_{rxn} : change in enthalpy when reactants in their standard states are changed to products in their standard states

Standard enthalpy of formation, ΔH°_{form} : change in enthalpy when one mole of product is formed from reactants in their standard states

Standard enthalpy of combustion, ΔH°_{comb} : change in enthalpy when one mole of reactant is burned completely in oxygen

A <u>formation reaction</u> is the chemical reaction by which 1 mole of a compound is formed from its elements in their standard states. The <u>standard states</u> is the most stable form of the element at room temperature $(25^{\circ}C)$ and pressure (1atm).

Enthalpy values vary according to the condition

a substance under these conditions is said to be in its standard state ...

Pressure: 100 kPa (1 atmosphere)

A stated temperature: usually 298K (25°C)

- as a guide, just think of how a substance would be under normal lab conditions
- assign the correct subscript [(g), (l) or (s)] to indicate which state it is in

• to tell if standard conditions are used, we modify the symbol for ΔH

$$\Delta H$$
 ΔH

Enthalpy Change Standard

Standard Enthalpy Change(at 298K)

Sample Problems

Example 1. Given the following standard enthalpies of formation ΔH_f (298K, 1 atm)

$$NH_{3(g)} - 46.2 \frac{kJ}{mol}$$
; $HCl_{(g)} - 92.3 \frac{kJ}{mol}$; $NH_4Cl_{(g)} - 315.0 \frac{kJ}{mol}$

Calculate the standard enthalpy change for the reaction, ΔH_r°

$$NH_4Cl_{(s)} \rightarrow NH_{3(g)} + HCl_{(g)}$$

Solution:

$$\begin{split} \Delta H_{rxn} &= \Delta H_{product} - \Delta H_{reactant} \\ \Delta H_{rxn} &= \left[\Delta H_f \big[NH_{3(g)} \big] + \Delta H_f \big[HCl_{(g)} \big] \right] - \Delta H_f \big[NH_4Cl_{(s)} \big] \\ \Delta H_{rxn} &= \left[(-46.2) + (-92.3) \right] - (-315.0) \\ \Delta H_{rxn} &= (-138.5) - (-315.0) \\ \Delta H_{rxn} &= 176.5 \ {^{kJ}}/_{mol} \end{split}$$

Example 2. Given the following standard enthalpies of formation, ΔH_f° in $^{kJ}/_{mol}$ (298K, 1 atm)

$$CH_{4(g)} - 74.9$$
; $CH_3Br_{(l)} - 36.0$; $HBr_{(g)} - 36.2$

Calculate the standard enthalpy change for the reaction, ΔH_{rxn}°

$$Br_{2(l)} + CH_{4(g)} \rightarrow CH_3Br_{(l)} + HBr_{(g)}$$

Solution:

$$\Delta H_{rxn} = \Delta H_{product} - \Delta H_{reactant}$$

$$\Delta H_{rxn} = \left[\Delta H_f \left[C H_3 B r_{(l)} \right] + \Delta H_f \left[H B r_{(g)} \right] \right] - \left[\Delta H_f \left[B r_{2(l)} \right] + \Delta H_f \left[C H_{4(g)} \right] \right]$$

$$\Delta H_{rxn} = \left[(-36.0) + (-36.2) \right] - \left[(0) + (-74.9) \right]$$

$$\Delta H_{rxn} = (-72.2) - (-74.9)$$

$$\Delta H_{rxn} = 2.7 \frac{kJ}{mol}$$

Example 3. Given the following standard enthalpies of formation ΔH_f in kJ/mol (289K, 1 atm)

$$CH_{4(g)} - 74.8$$
; $CO_{2(g)} - 393.5$; $H_2O_{(l)} - 285.8$

Calculate the standard enthalpy change for the reaction, ΔH_{rxn}°

$$CH_{4(g)} + 2O_{2(g)} \rightarrow CO_{2(g)} + 2H_2O_{(l)}$$

Solution:

$$\Delta H_{rxn} = \Delta H_{product} - \Delta H_{reactant}$$

$$\Delta H_{rxn} = \left[\Delta H_f \left[CO_{2(g)} \right] + 2\Delta H_f \left[H_2 O_{(l)} \right] \right] - \left[\Delta H_f \left[CH_{4(g)} \right] + 2\Delta H_f \left[O_{2(g)} \right] \right]$$

$$\Delta H_{rxn} = \left[(-393.5) + 2(-285.8) \right] - \left[(-74.8) + 2(0) \right]$$

$$\Delta H_{rxn} = (-965.1) - (-74.8)$$

$$\Delta H_{rxn} = -890.3 \frac{kJ}{mol}$$

Example 4. If 10.3 grams of CH₄ are burned completely, how much heat will be produced?

$${
m CH_{4(g)}}$$
 + 2 ${
m O_{2(g)}}$ $ightarrow$ ${
m CO_{2(g)}}$ + 2 ${
m H_2O_{(I)}}$ $\Delta H_{rxn} = -802.2~kJ$

 $\Delta H = -514$ kJ, which means the heat is *released* for the reaction of 10.3 grams CH₄

Example 5. Given the following equation,

$$C_6H_{12}O_{6(s)} + 6O_{2(g)} \rightarrow 6CO_{2(g)} + 6H_2O_{(l)}$$
 $\Delta H = -2803 \text{ kJ/mol}$

Calculate the energy released when $45.00\,\mathrm{g}$ of glucose is burned in oxygen.

Solution:

$$45.00g \ C_6 H_{12} O_6 \times \frac{1 \ mol C_6 H_{12} O_6}{180.2 g C_6 H_{12} O_6} \times \frac{-2803 \ kJ}{1 \ mol C_6 H_{12} O_6}$$

$$\Delta H = -700.0 \ kJ$$

Hess's Law

The change in enthalpy that occurs when reactants are converted to products is the same whether the reaction occurs in one step or a series of steps.

Used for calculating enthalpy for a reaction that cannot be determined directly.

In using stepwise reactions to determine an overall reaction



Republic of the Philippines

Laguna State Polytechnic University

Province of Laguna

Level I Institutionally Accredited

- Remember the rules for manipulating equations.
- Add the D*H* values for each step together after proper manipulation to obtain the overall enthalpy for the desired reaction.

Example 6. Given the combustion of glucose

$$C_6H_{12}O_{6(s)} + 6O_{2(g)} \rightarrow 6CO_{2(g)} + 6H_2O_{(l)}$$
 $\Delta H = -2816 \, kJ$ and the combustion of ethanol

$$C_2 H_5 OH_{(l)} + 3 O_{2(g)} \rightarrow 2 CO_{2(g)} + 3 H_2 O_{(l)} \quad \Delta H = -1372 \; kJ$$

Calculate ΔH (in kJ) for the fermentation of glucose:

$$C_6H_{12}O_{6(s)} \rightarrow 2C_2H_5OH_{(l)} + 2CO_{2(g)}$$
 $\Delta H = ?$
 $C_6H_{12}O_{6(s)} \rightarrow 2C_2H_5OH_{(l)} + 2CO_{2(g)}$ $\Delta H = ?$

Solution:

$$\begin{array}{ll} C_6H_{12}O_{6(s)} + 6O_{2(g)} \rightarrow 6CO_{2(g)} + 6H_2O_{(l)} & \Delta H = -2816 \ kJ \ ----- 1 \\ C_2H_5OH_{(l)} + 3O_{2(g)} \rightarrow 2CO_{2(g)} + 3H_2O_{(l)} & \Delta H = -1372 \ kJ \ ----- 2 \end{array}$$

Reverse eqn 2
$$2CO_{2(q)} + 3H_2O_{(l)} \rightarrow C_2H_5OH_{(l)} + 3O_{2(q)} \Delta H = +1372 \ kJ$$

Multiply by 2

$$4CO_{2(g)} + 6H_2O_{(l)} \rightarrow 2C_2H_5OH_{(l)} + 6O_{2(g)} \Delta H = +2744 kJ$$

$$\begin{split} &C_6H_{12}O_{6(s)} + 6O_{2(g)} \rightarrow 6CO_{2(g)} + 6H_2O_{(l)} \ \Delta H = -2816 \ kJ \\ &4CO_{2(g)} + 6H_2O_{(l)} \rightarrow 2C_2H_5OH_{(l)} + 6O_{2(g)} \ \Delta H = +2744 \ kJ \end{split}$$

$$C_6H_{12}O_{6(s)} \rightarrow 2C_2H_5OH_{(l)} + 2CO_{2(g)} \quad \Delta H = -72 \ kJ$$

exothermic

Example 7. Given the following equations

$$\begin{array}{ll} H_3BO_{3(aq)} \to HBO_{2\,(aq)} + H_2O_{(l)} & \Delta H = -0.02\,kJ \\ H_2B_4O_{7(aq)} + H_2O_{(l)} \to 4HBO_{2(aq)} & \Delta H = -11.3\,kJ \\ H_2B_4O_{7(aq)} \to 2B_2O_{3(s)} + H_2O_{(l)} & \Delta H = -17.5\,kJ \end{array}$$

Find the ΔH for the overall reaction of

$$2H_3BO_{3(aq)} \rightarrow B_2O_{3(s)} + 3H_2O_{(l)}$$
 $\Delta H = ?$

Solution:

$$2H_3BO_{3(aq)} \rightarrow B_2O_{3(s)} + 3H_2O_{(l)}$$

$$H_3BO_{3(aq)} \to HBO_{2(aq)} + H_2O_{(l)}$$
 $\Delta H = -0.02 \ kJ ----- 1$

$$H_2B_4O_{7(aq)} + H_2O_{(l)} \to 4HBO_{2(aq)}$$
 $\Delta H = -11.3 \text{ kJ} - --- 2$

$$H_2B_4O_{7(aq)} \rightarrow 2B_2O_{3(s)} + H_2O_{(l)}$$
 $\Delta H = -17.5 \; kJ$ ------ 3

Multiply equation 1 by a factor of 2

x2
$$2H_3BO_{3(aq)} \rightarrow 2HBO_{2(aq)} + 2H_2O_{(l)}$$
 $\Delta H = 2(-0.02 kJ) = -0.04kJ$

Reverse equation 2 and divide by 2



Republic of the Philippines Laguna State Polytechnic University

Province of Laguna

$$2HBO_{2(aq)} \rightarrow 1/2 H_2 B_4 O_{7(aq)} + 1/2 H_2 O_{(l)} \Delta H = (11.3 kJ) \div 2 = 5.65 kJ$$

Divide equation 3 by 2

÷ **2**
$$1/2 H_2 B_4 O_{7(aq)} \rightarrow B_2 O_{3(s)} + 1/2 H_2 O_{(l)} \Delta H = (-17.5 kJ) \div 2 = -8.75 kJ$$

Adding the equation:

$$2H_{3}BO_{3(aq)} \rightarrow 2HBO_{2(aq)} + 2H_{2}O_{(l)} \qquad \Delta H = 2(-0.02 \, kJ) = -0.04 kJ$$

$$2HBO_{2(aq)} \rightarrow 1/2 H_{2}B_{4}O_{7(aq)} + 1/2 H_{2}O_{(l)} \quad \Delta H = (11.3 \, kJ) \div 2 = 5.65 \, kJ$$

$$1/2 H_{2}B_{4}O_{7(aq)} \rightarrow B_{2}O_{3(s)} + 1/2 H_{2}O_{(l)}\Delta H = (-17.5 \, kJ) \div 2 = -8.75 kJ$$

$$2H_{3}BO_{3(aq)} \rightarrow B_{2}O_{3(s)} + 3H_{2}O_{(l)} \quad \Delta H = -3.14 \, kJ$$

Engaging Activities

Evaluate the following. Show your solution.

- 1. How many joules are required to heat 250 grams of liquid water from 0 to 100 °C
- 2. How many joules are required to melt 100 grams of water?
- 3. How many joules are required to boil 150 g of water?
- 4. How many joules are required to heat 200 g of water from 25 °C to 125 °C



Performance Tasks

Evaluate the following. Show your solution.

1. Hydrogen peroxide decomposes according to the following thermochemical reaction:

$$H_2O_{2(l)} \to H_2O_{(l)} + \frac{1}{2}O_{2(g)}; \qquad \Delta H = -98.2 \text{ kJ}$$

Calculate the change in enthalpy ΔH , when 1.00 g of hydrogen peroxide decomposes.

2. Consider the following thermochemical equations:

$$Fe_2O_3 + 3CO \rightarrow 2Fe + 3CO_2$$
 $\Delta H = -28.0 \text{ kJ}$
 $3Fe + 4CO_2 \rightarrow 4CO + Fe_3O_4$ $\Delta H = +12.5 \text{ kJ}$

Calculate the value of ΔH (in k]) for:

$$3Fe_2O_3 + CO \rightarrow CO_2 + 2Fe_3O_4$$



Learning Resources

- Brown, Holme, Peterson, Sack and Gabler. Chemistry for Engineering Students Philippine Edition. Cengage Learning. 2018
- Masterton, Hurley, Petersen, Sack and Gabler. Principles and Reaction: Chemistry for Engineering Students Philippine Edition. Cengage Learning. 2018
- Brown and Holme. Chemistry for Engineering Students 2nd Edition. Cengage Learning. 2012
- Brown, LeMay, Bursten. Chemistry the Central Science. Pearson Education Limited. 2015
- Graph of Phase Diagram for Water (n.d.). Retrieved September 30, 2020 from https://www.norwellschools.org/cms/lib/MA01001453/Centricity/Domain/462/2015_16_CP_ Chem_ReviewSheet_Test_Chapter12.pdf
- Diagram of Changes of State of Water. (2013). Retrieved September 30, 2020 from https://aesnotes.wordpress.com/2013/07/10/the-water-cycle-and-water-changing-state/
- Phase Changes. (n.d.). retrieved September 30, 2020 from https://courses.lumenlearning.com/boundless-chemistry/chapter/phase-changes/
- State vs Path Function. (n.d.). Retrieved September 30, 2020 from https://chem.libretexts.org/Bookshelves/Physical_and_Theoretical_Chemistry_Textbook_Maps/Supplemental_Modules_(Physical_and_Theoretical_Chemistry)/Thermodynamics/Fundamentals_of_Thermodynamics/State_vs._Path_Functions

Ellaine L. Ching Instructor

This module is for educational purpose only. Under section Sec. 185 of RA 8293, which states, "The fair use of a copyrighted work for criticism, comment, news reporting, teaching including multiple copies for classroom use, scholarship, research, and similar purposes is not an infringement of copyright. The unauthorized reproduction, use, and dissemination of this module without joint consent of the authors is strictly prohibited and shall be prosecuted to the full extent of the law, including appropriate administrative sanctions, civil, and criminal"