PROVISIONAL STRUCTURE — PHYSICAL SAMPLE REQUIRED — NOT APPROVED FOR MASS PRODUCTION

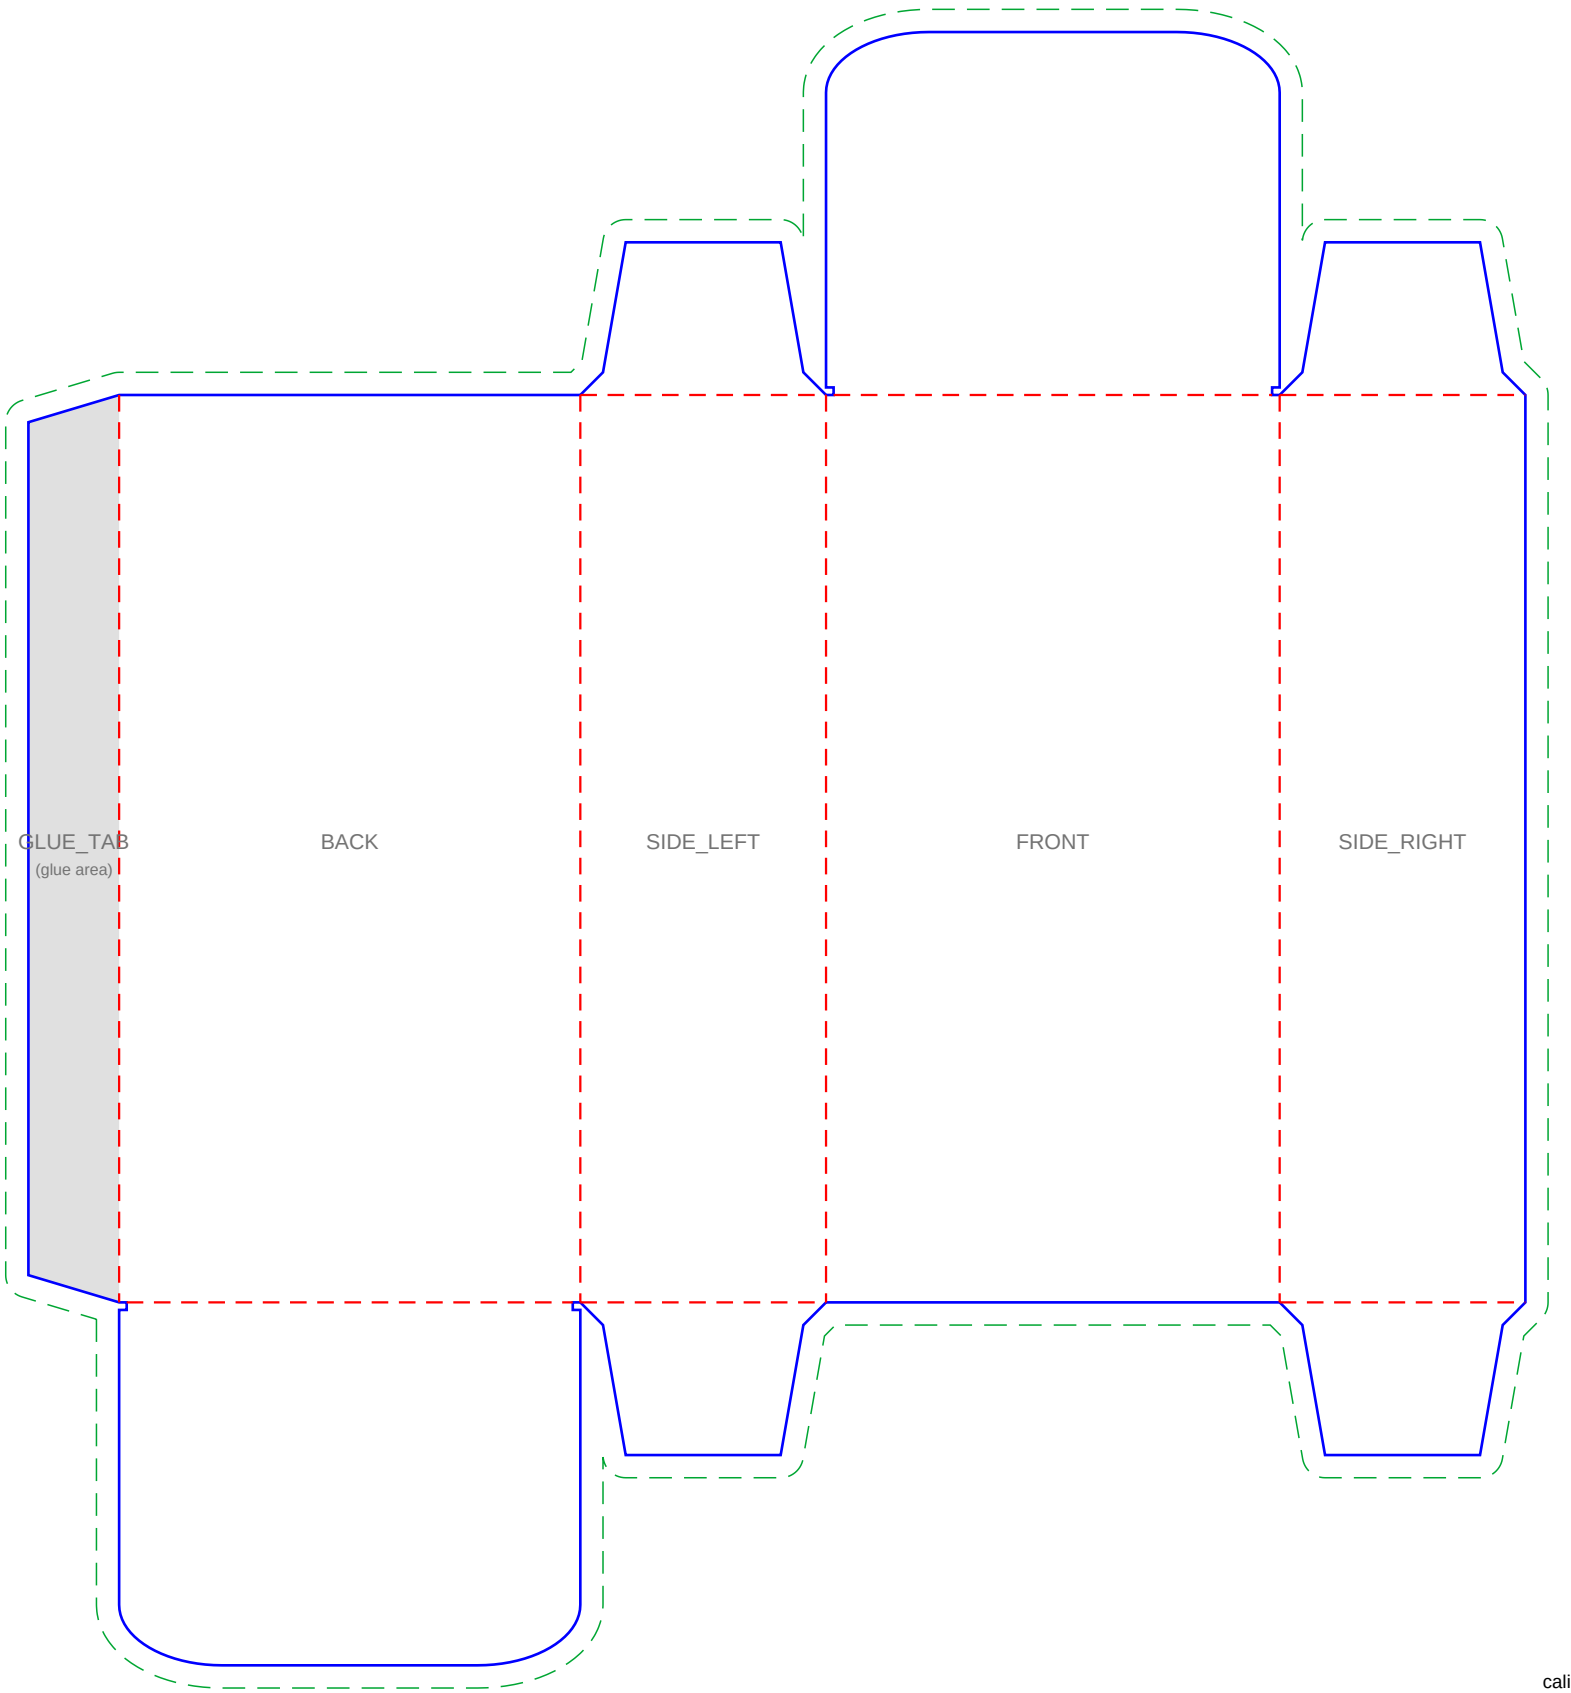

PHYSICAL TEST SHEET — PRINT AT 100% SCALE

Do NOT use 'fit to page' / 'shrink to printable area'.
Verify the calibration square measures exactly 50 x 50 mm before folding.

Legend:
- cut (die knife), incl. tuck-fold slits
- crease / score (fold, never cut)
- bleed contour (ignore for the fold test)

Assembly sequence:
1. Cut along every solid blue line (incl. the short slits at the tuck folds).
2. Score and fold every dashed red line.
3. Fold the side panels and glue the flap behind the free back edge.
4. Fold both dust-flap pairs in, then close each tuck: the curved shoulders should slide in and the 2t ears lock in the slits.
5. Record the result in the physical-validation record (FIT_PASS / bounded failure codes) with measured corrections in mm.

Structure:
template: reverse_tuck_end_carton/1.2
geometry hash: 9f80b57fd5ff560215aa2c4bee359db6
inner dimensions: 59 x 31 x 119 mm
board thickness: 0.5 mm — use representative stock
flat size: 198 x 216 mm

STE/RTE 1.2 D-derived pilot;
PHYSICALLY_VALIDATED_INSTANCE requires a FIT_PASS on THIS exact hash.



calibration square — must measure 50 x 50 mm when printed