PROVISIONAL STRUCTURE — PHYSICAL SAMPLE REQUIRED — NOT APPROVED FOR MASS PRODUCTION

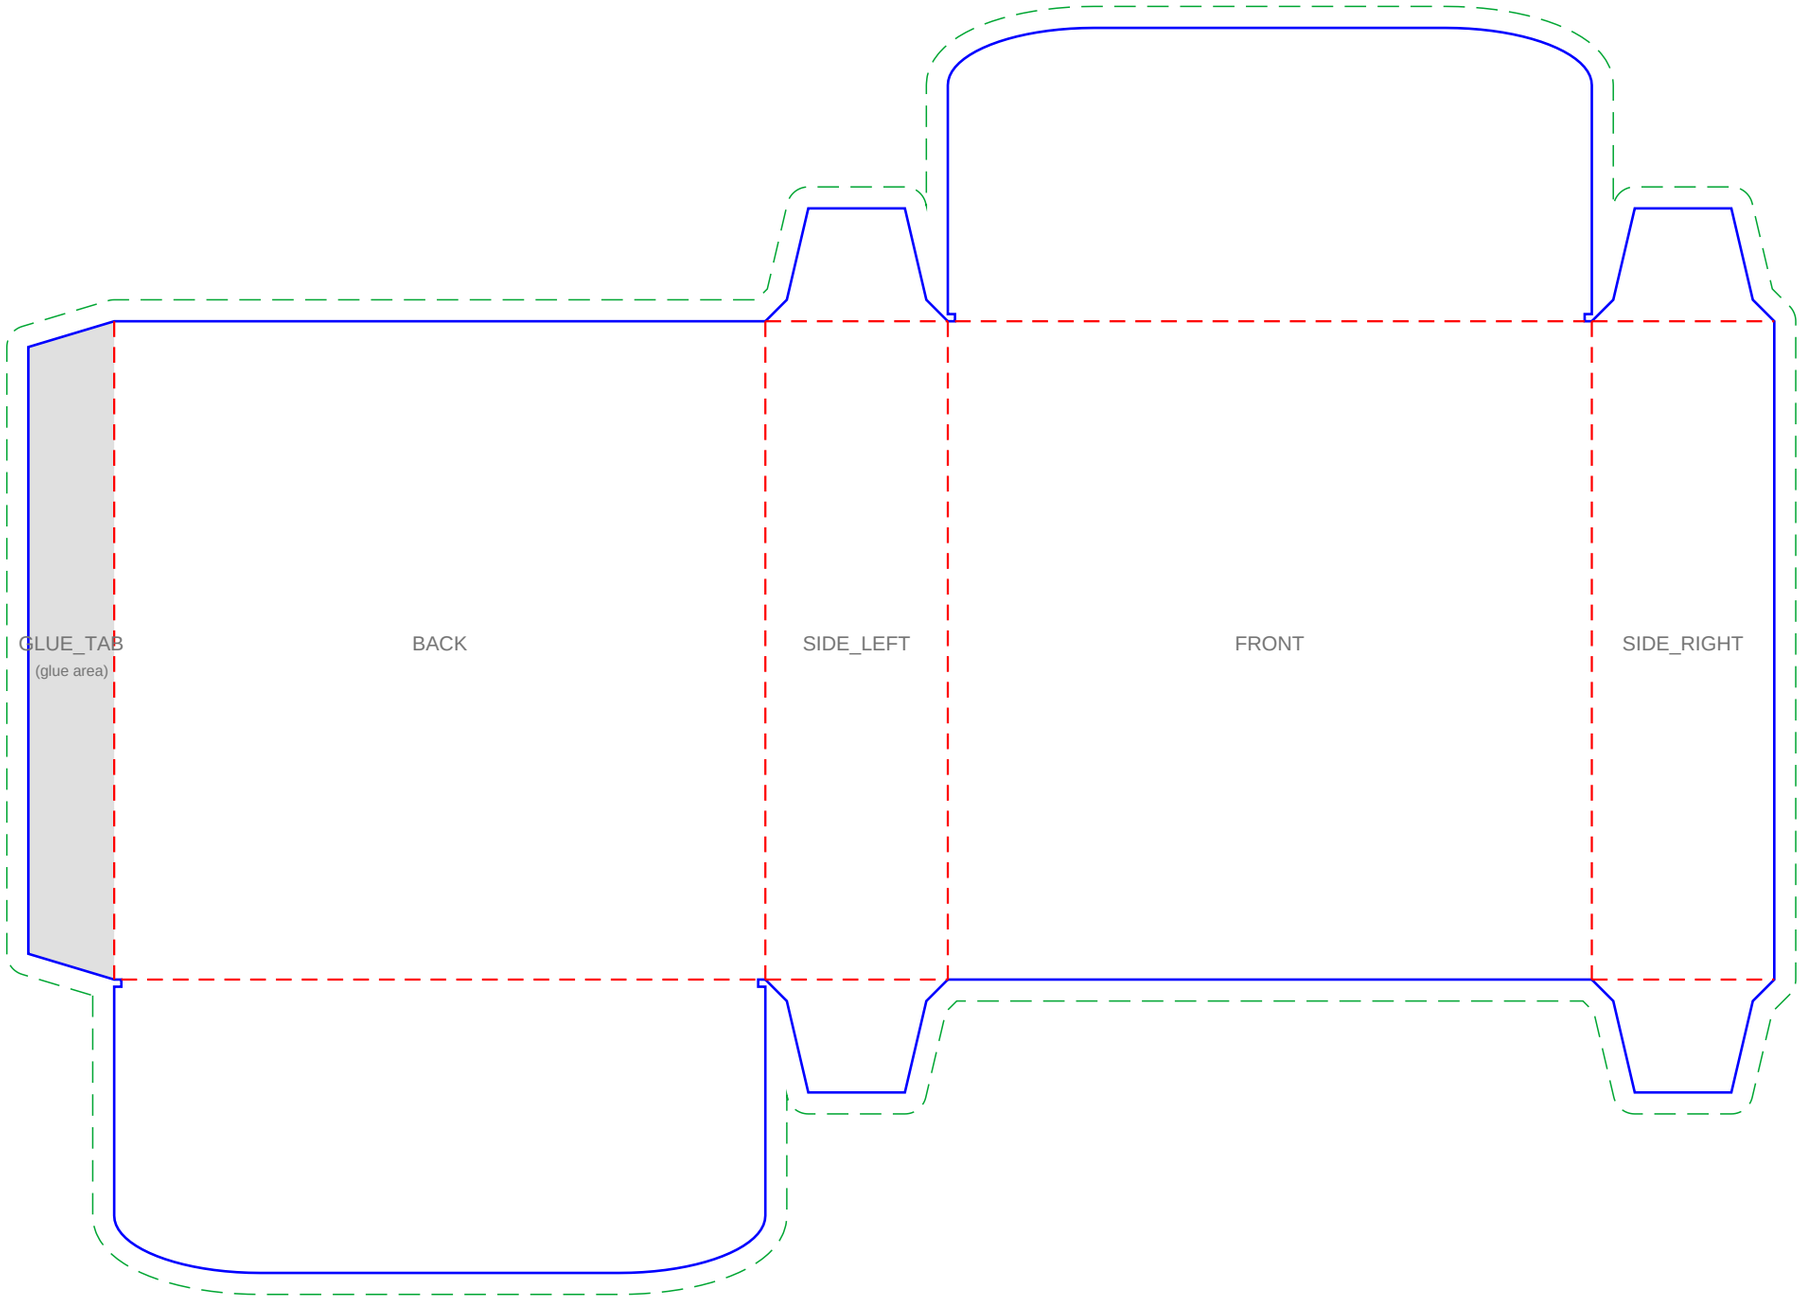

PHYSICAL TEST SHEET — PRINT AT 100% SCALE

Do NOT use 'fit to page' / 'shrink to printable area'.
Verify the calibration square measures exactly 50 x 50 mm before folding.

Legend:
- cut (die knife), incl. tuck-fold slits
- crease / score (fold, never cut)
- bleed contour (ignore for the fold test)

Assembly sequence:
1. Cut along every solid blue line (incl. the short slits at the tuck folds).
2. Score and fold every dashed red line.
3. Fold the side panels and glue the flap behind the free back edge.
4. Fold both dust-flap pairs in, then close each tuck: the curved shoulders should slide in and the 2t ears lock in the slits.
5. Record the result in the physical-validation record (FIT_PASS / bounded failure codes) with measured corrections in mm.

Structure:
template: reverse_tuck_end_carton/1.2
geometry hash: 3b59a58647cf29bf49c31c0e2842f05d
inner dimensions: 89 x 24 x 91 mm
board thickness: 0.5 mm — use representative stock
flat size: 244 x 174 mm

STE/RTE 1.2 D-derived pilot;
PHYSICALLY_VALIDATED_INSTANCE requires a FIT_PASS on THIS exact hash.



calibration square — must measure 50 x 50 mm when printed