


CSE 4512

Student ID: 220041135

Lab 3:

Final Topology

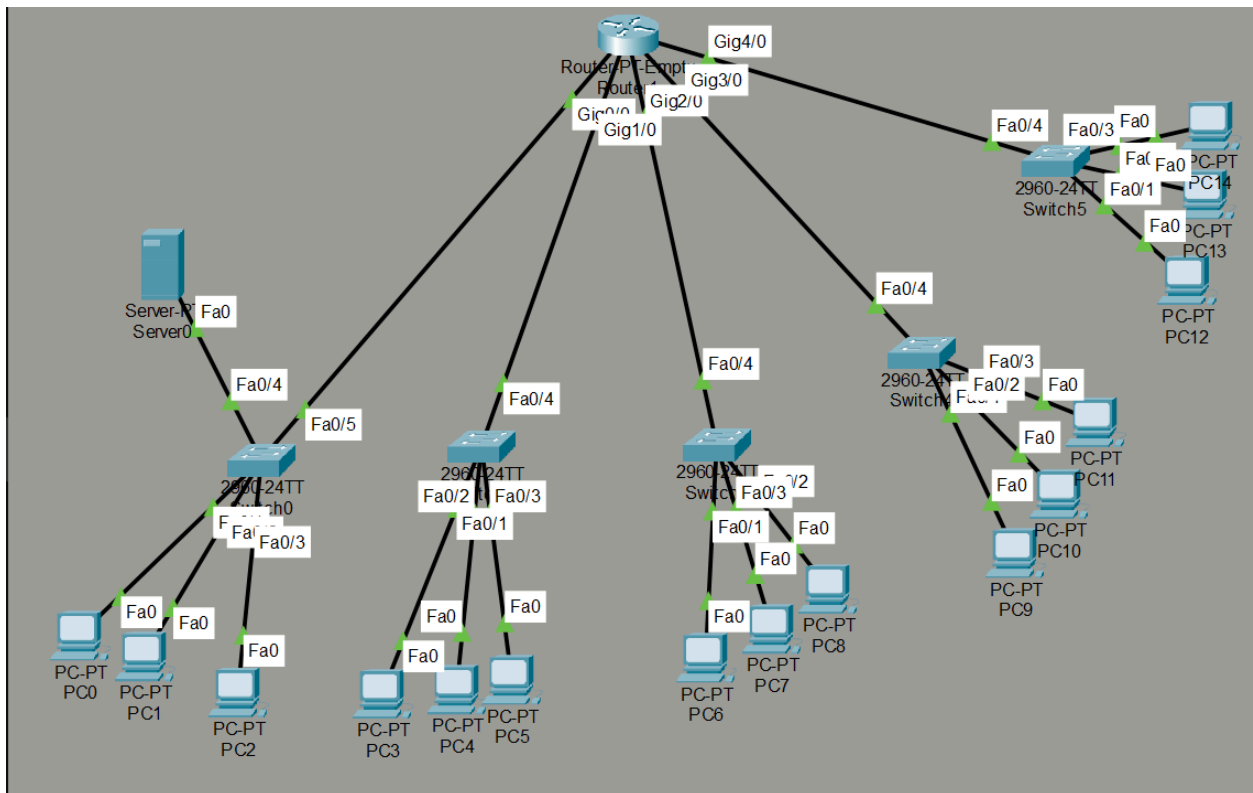


Procedure


1. Firstly as per the instructions, I subdivided the whole networks into subnets.
2. I gave a specific address (192.35.8.2) for the DHCP server and gave 192.35.8.1 as the default gateway.
3. Then from the service option in DHCP i created five pools for the five networks which have a specific starting and ending range and have their own default gateways.

4. Then I configured the router to act as a DHCP server and also set the routing and relay agent in the router through the CLI.
5. Now I converted every PC to have a DHCP address instead of static address.
6. And then finally we were able to send messages to every PCs which have their dynamic IP address


Observations & Results

- Ping Checking for PCs
 - Here pings were checked for some PCs as a proof of sending packets in the following SS.

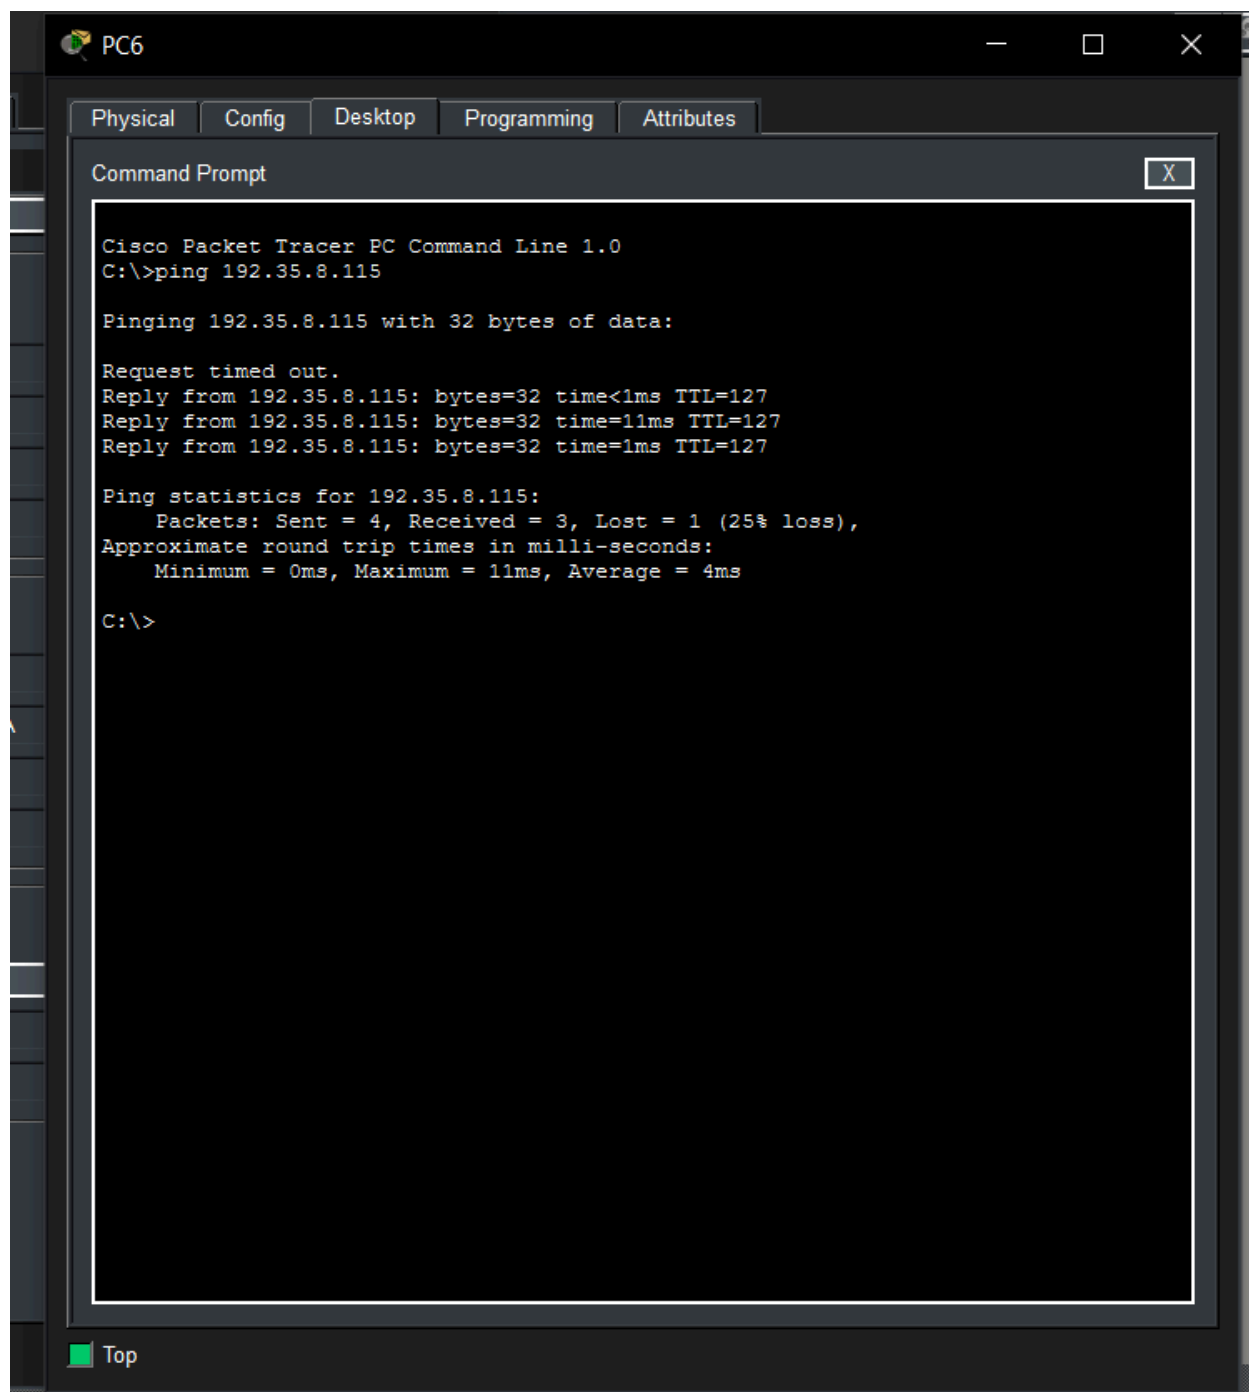

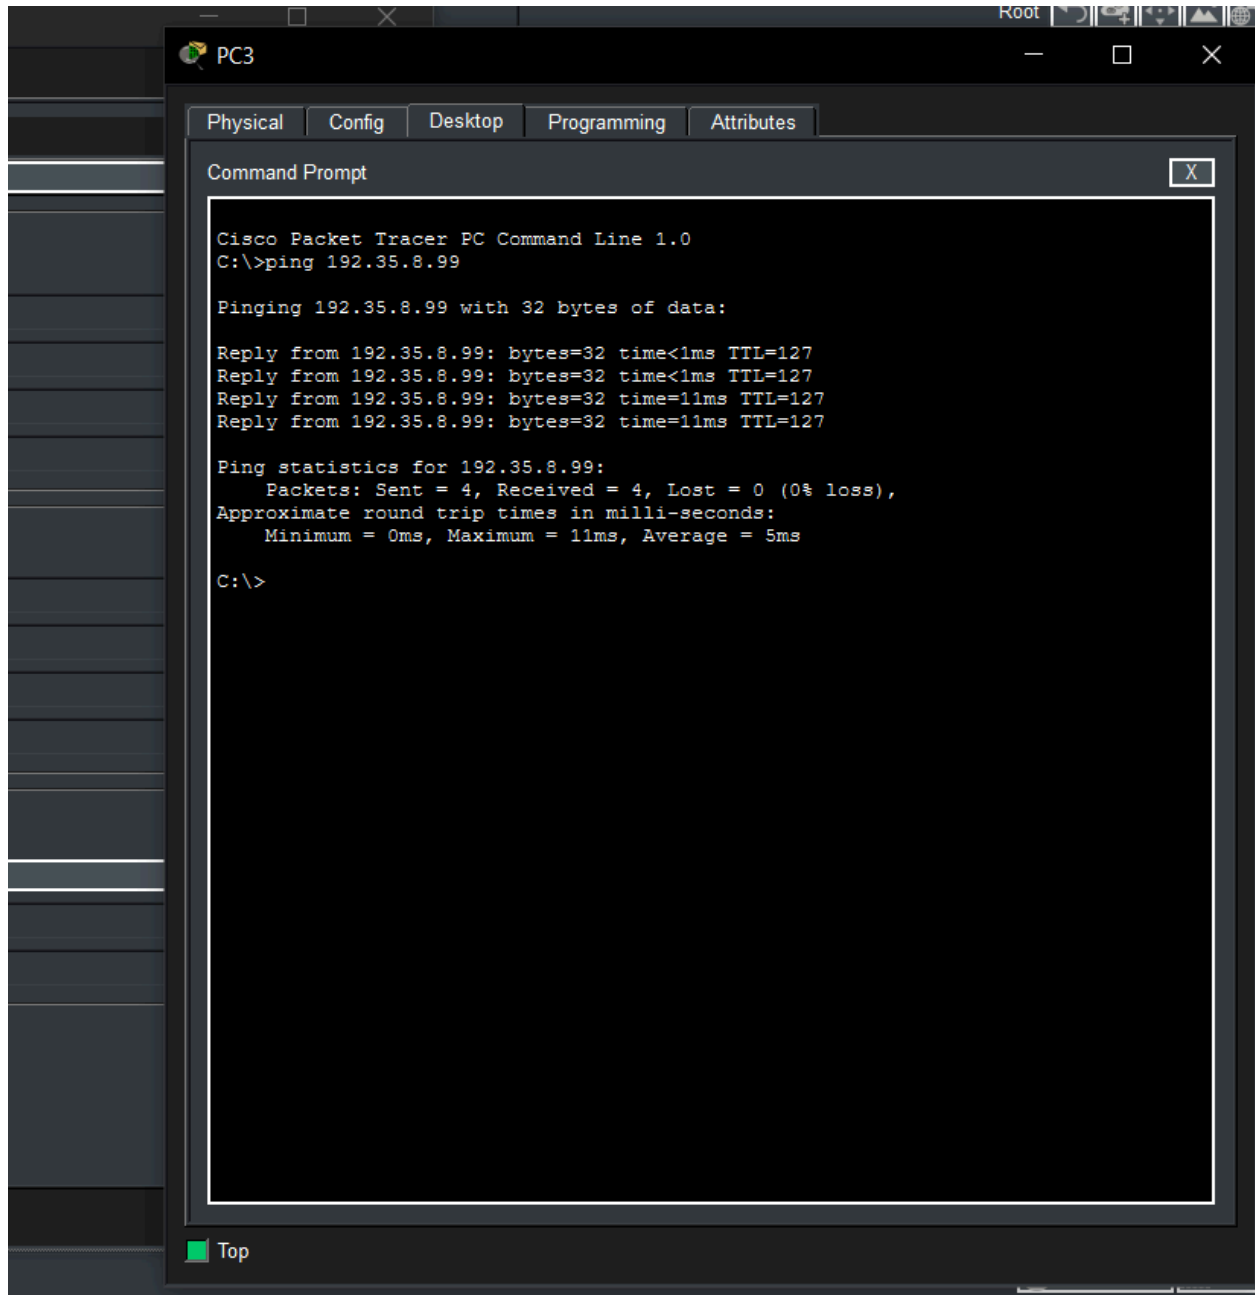

- DHCP Address
 - In the following SS it is shown that every PCs get their IP address automatically using DHCP

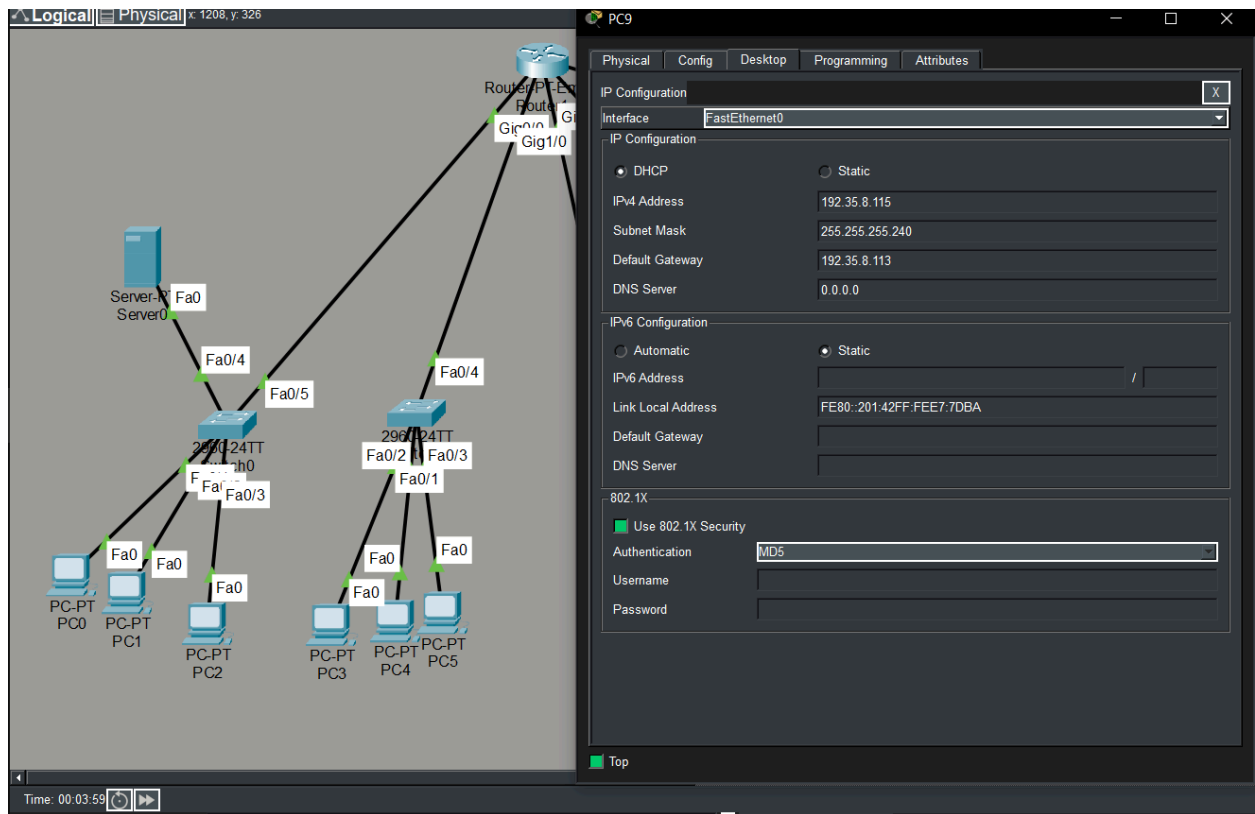

Challenges

- Making the router act as a DHCP server was difficult and challenging.
- Connecting pools at the router was challenging and had to be careful so that no mistakes were made while writing in the CLI.