
TSNM 4U MARK II

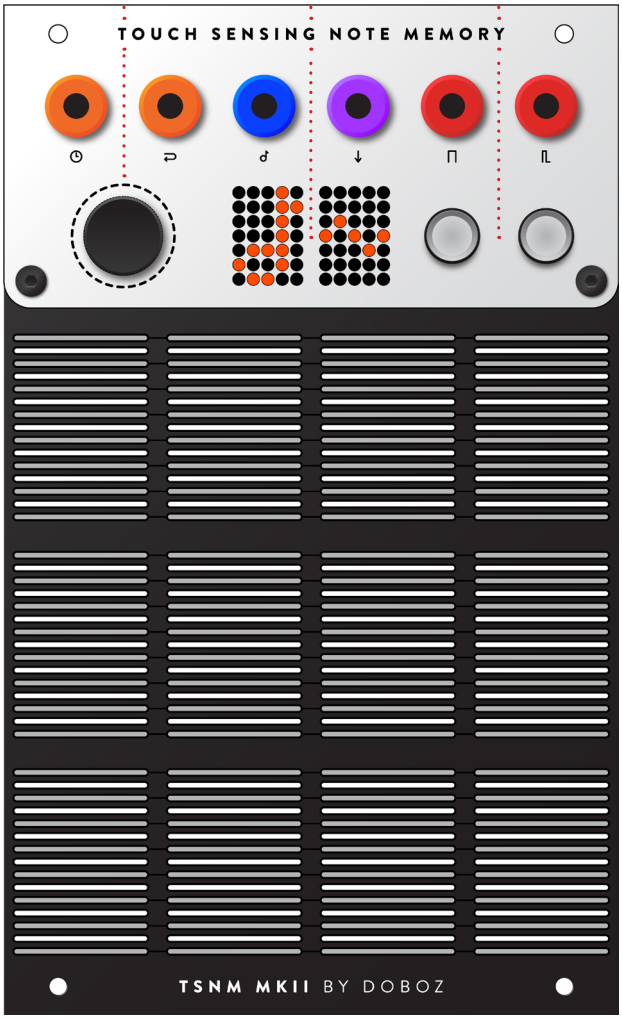

- **CLOCK** input
- **RESET** input
- **VOLT/OCTAVE** output (0-8V)
- **PRESSURE** output (0-9V)
- **"GATE"** output (0-10V)
- **"TRIGGER"** output (0-10V)

NOTE PLATES

TOUCH SENSING NOTE MEMORY is a performance oriented monophonic keyboard controller featuring 12 note plates (tunable over 6 octaves) and two transposer buttons (variable transposition distance from -36 to +36 semitones). Highly accurate pitch (V/oct) output is guaranteed by a precision 16-bit DAC. Pressure sensing capability of note plates gives maximum human control through the dedicated CV output. On-board arpeggiator, sequencer, quantizer, slew limiter, vibrato, pressure CV recorder. The module can save 17 presets including keyboard layout, sequence and all the options under settings.

For full description of features and calibration instructions please download the "TSNM Firmware v4.0 User's Guide" document.

depth: **30mm**
power: **<50mA** @ +15V, **<15mA** @ -15V