

Supplementary Material: Extended Derivations, Engineering Trade Studies, and Operational Specifications for the SHBT-Graser Aneutronic p-¹¹B Power Plant

Abstract—This supplementary document collects the extended theoretical derivations, engineering trade studies, and complete operating tables that accompany the main article “A Commercial SHBT-Graser Aneutronic p-¹¹B Fusion Power Plant” ([power.pdf](#)). It contains: the full macro-burst timing derivation of the C-band graser driver; the topological operator and modular-invariance formulation of the holographic boundary channel; the pellet stoichiometry and injector trade study (light-gas versus electromagnetic launch); the three-field magnetic stopping-radius and radiant-flash derivations; the dual-domain tenth-value-layer shielding calculations; the six-stage operational sequence with the graser isomer battery bus specification; and the isomer coherence physics and 20 K cryogenic sub-loop balance. All numerical quantities are consistent with the 78-gate audit matrix ([verification_matrix.json](#)) of the companion digital twin [1], [3].

1 GRASER DRIVER MACRO-BURST TIMING DERIVATION

The primary specification requires a time-averaged optical beam power of $P_{\text{avg}} = 25.0$ MW at a macro-pulse repetition frequency of $f_{\text{rep}} = 100.0$ Hz. Energy conservation fixes the optical energy delivered per macro-shot:

$$E_{\text{macro}} = \frac{P_{\text{avg}}}{f_{\text{rep}}} = \frac{25.0 \times 10^6}{100.0} = 250.0 \text{ kJ}. \quad (1)$$

The driver also specifies a constituent micro-pulse of $E_{\text{micro}} = 100.0$ J in a coherence window $\tau_{\text{micro}} = 1.0$ ps, i.e. an instantaneous peak of

$$P_{\text{peak}} = \frac{E_{\text{micro}}}{\tau_{\text{micro}}} = \frac{100.0 \text{ J}}{1.0 \times 10^{-12} \text{ s}} = 100.0 \text{ TW}. \quad (2)$$

Treating (2) as a 100 Hz isolated shot would under-drive the core by a factor of 2,500 (10 kW average), while concentrating (1) into a single 1 ps envelope would demand 2.5×10^{17} W, beyond any dielectric breakdown threshold and deep into relativistic self-focusing [7], [8]. The contradiction is resolved by an RF bunch hierarchy on a C-band linac at $f_{\text{rf}} = 5.712$ GHz:

$$T_{\text{rf}} = \frac{1}{f_{\text{rf}}} = 1.750700 \times 10^{-10} \text{ s} = 175.070 \text{ ps}. \quad (3)$$

The micro-bunch count per macro-shot is

$$N_{\text{micro}} = \frac{E_{\text{macro}}}{E_{\text{micro}}} = \frac{250,000}{100} = 2,500. \quad (4)$$

Under synchronous fundamental-bucket filling ($h = 1$) the burst duration is

$$\tau_{\text{burst}} = N_{\text{micro}} T_{\text{rf}} = 2500 \times 175.070 \text{ ps} = 437.675 \text{ ns}, \quad (5)$$

(875.350 ns for every-second-bucket filling $h = 2$), both comfortably inside the $1.0 \mu\text{s}$ flat-top of cryogenic C-band klystrons [9]. The intermediate burst power is

$$P_{\text{burst}} = \frac{E_{\text{macro}}}{\tau_{\text{burst}}} = \frac{250.0 \times 10^3}{4.37675 \times 10^{-7}} \approx 571.2 \text{ GW}, \quad (6)$$

with macro duty factor $D_{\text{macro}} = \tau_{\text{burst}} f_{\text{rep}} = 4.37675 \times 10^{-5}$ and a quiescent cooling interval of ≈ 9.99956 ms between bursts. Peak power is set by the 1 ps micro-pulse (100 TW), intermediate power by the 437.675 ns burst envelope (571.2 GW), and average power by the 100 Hz repetition (25.0 MW) [10], [11], [12], [13].

2 TOPOLOGICAL OPERATORS AND MODULAR INVARIANCE

2.1 Modular reconstruction cycle

The complete algebraic transformation across the vacuum transition is governed by the reconstruction cycle operator

$$\hat{R}_{\text{render}} = \hat{T}^\theta \hat{O}_{\text{excitation}}(\theta) \hat{D}_{\text{render}}^\dagger, \quad (7)$$

where $\hat{D}_{\text{render}}^\dagger$ projects state amplitude onto the $\eta_D = 23/33$ dark branch, $\hat{O}_{\text{excitation}}(\theta) = e^{-i\theta\hat{Q}}$ executes the phase-locked $U(1)$ gauge rotation, and $\hat{T}^\theta$ is the unitary Heegaard–Floer boundary relabeling isometry preserving the boundary L^2 norm strictly below the 10^{-122} holographic noise floor [2]. The generator Lie algebras of the active boundary manifold and the dark sector are denoted $\sigma_k^{(i)}$ and $\tau_k^{(j)}$, and the macroscopic Stinespring dilation $V_{\text{unified}}^{\text{macro}}$ carries the joint representation.

The transformation strictly enforces the adiabatic invariance condition

$$\Delta S_A = 0, \quad (8)$$

guaranteeing zero non-unitary quantum-information leakage during state translation. Topological boundary stability is simultaneously constrained by the Kojima entropy bounds

$$\text{Ent}(\varphi) \leq 10^{20} \cdot \text{Vol}(M), \quad \text{Ent}(\varphi_1) \leq [M_1 : M] \cdot (\ell_{\text{He}} - 1) \cdot \log 3, \quad (9)$$

where $[M_1 : M]$ is the covering index of the boundary manifold and ℓ_{He} the Heegaard genus of the bounding 3-manifold.

2.2 Modular closure chain

Within the canonical WZW affine branch $(k_\ell, k_q, K) = (26, 8, 312)$, modular closure invariance is equivalent to the simultaneous vanishing of the framed topological boundary anomaly tensor Δ_{fr} , the induced spacetime metric stress error $E_{\mu\nu}$, and the projected physical Hamiltonian:

$$[M, S^0] = [M, T^0] = 0 \iff \Delta_{\text{fr}} = 0 \iff E_{\mu\nu} = 0 \iff \Pi_{\text{phys}} H_{\text{total}} \Pi_{\text{phys}} = 0. \quad (10)$$

If a localized terawatt-scale stress-energy gradient were left uncompensated, it would rupture the closure chain and drive the boundary toward topological horizon saturation $\Delta N \geq N_{\text{sat}}$, destroying holographic coherence and dissipating beam energy back into the driving electronics. PCSS crowbar anomaly interlocks therefore monitor the modular residual and fire below the 2.5 ns threshold before saturation can occur [14], [15], [16].

2.3 Solid-state suppression

In solid-state media, propagating megavolt-scale gamma flux induces Compton scattering and e^+e^- pair production cascading into 6.92×10^8 optical-phonon up-conversions per interaction, exceeding the dissipation capacity of CVD diamond ($\kappa \sim 2200 \text{ W/m} \cdot \text{K}$) and quenching NbN/MgB₂ HTS buses ($T_c < 11.79 \text{ K}$). Re-rendering in an ultra-high-vacuum drift chamber ($P < 10^{-10} \text{ Torr}$) suppresses the real-space amplitude inside the substrate by $(1 - \eta_D) = 10/33$, reducing effective Compton cross-sections by

$$\sigma_{\text{eff}} = \sigma_{\text{Compton}} \left(\frac{10}{33} \right)^2 \approx 0.0918 \sigma_{\text{Compton}}, \quad (11)$$

a 90.82% suppression protecting the cryogenic sub-assemblies [17].

3 FUEL PELLET STOICHIOMETRY

Solid isotopically-enriched decaborane $^{11}\text{B}_{10}\text{H}_{14}$ (99.9% ^{11}B) is selected over cryogenic liquid H-B mixtures, which require refrigerated sabots complicating high-speed injection. Molecular parameters: $M_w = 10(11.009305) + 14(1.007825) = 124.2026 \text{ g/mol}$, $\rho_{\text{fuel}} = 940.0 \text{ kg/m}^3$ at 293 K, and stoichiometric ratio $N_H/N_B = 1.40$, giving a slight proton excess over the 1:1 p- ^{11}B requirement to ensure complete boron burnup.

At fractional burnup $\eta_{\text{burn}} = 0.35$, delivering $E_{\text{yield}} = 87.5 \text{ MJ}$ requires

$$N_{\text{consumed}} = \frac{E_{\text{yield}}}{Q_{pB11}} = \frac{87.5 \times 10^6}{1.3906 \times 10^{-12}} \approx 6.2922 \times 10^{19} \text{ } ^{11}\text{B atoms}, \quad (12)$$

$$N_{B,\text{total}} = \frac{N_{\text{consumed}}}{\eta_{\text{burn}}} \approx 1.79777 \times 10^{20} \text{ } ^{11}\text{B atoms}, \quad (13)$$

$$N_{\text{mol}} = \frac{N_{B,\text{total}}}{10} \approx 1.79777 \times 10^{19} \text{ molecules}, \quad (14)$$

$$m_{\text{pellet}} = \frac{N_{\text{mol}}}{N_A} M_w = 2.98527 \times 10^{-5} \text{ mol} \times 124.2026 \text{ g/mol} \approx 3.7078 \text{ mg}. \quad (15)$$

The spherical pellet volume is 3.9445 mm^3 ($D_{\text{pellet}} = 1.960 \text{ mm}$). At 100 Hz continuous operation consumes 8,640,000 pellets/day, i.e. 32.035 kg/day fuel throughput.

4 INJECTOR TRADE STUDY: LIGHT-GAS VERSUS LORENTZ RAILGUN

Two launch architectures were evaluated for delivering the 3.71 mg pellet to the chamber target point at $v_{\text{inj}} = 250 \text{ m/s}$:

(a) **Two-stage light-gas pneumatic injector.** A helium/hydrogen driver-gas stage accelerates a carrier sabot down a smooth-bore barrel. Advantages: gentle acceleration over long stroke, mature cryogenic pellet handling heritage, high reliability. Disadvantages: the discardable sabot must be split and diverted before the vacuum port (adding debris-handling hardware and a separation nose cone); driver-gas leakage through the barrel/chamber boundary seal raises background pressure and parasitic load on the cryopumps; gas-dynamic flow at the muzzle perturbs pellet trajectory at the $\pm 5 \mu\text{m}$ transverse level; cycle time at 100 Hz leaves little margin for recharging the driver reservoir.

(b) **Electromagnetic Lorentz railgun (adopted).** A sabot-free conducting armature couples Lorentz force directly to the pellet carrier:

$$\mathbf{F} = I\mathbf{L} \times \mathbf{B}, \quad a(t) = \frac{\mathcal{L}' I(t)^2}{2m_{\text{carrier}}}, \quad (16)$$

with $\mathcal{L}'$ the per-unit-length rail inductance. Advantages: no driver gas (the vacuum boundary seal is maintained), no sabot discard stage, millisecond-scale electronic timing synchronizable with the graser trigger gate, and position feedback from the same rail sensors. The chosen fifth-order minimum-jerk acceleration schedule

$$s(\tau) = 10\tau^3 - 15\tau^4 + 6\tau^5, \quad \tau \in [0, 1], \quad (17)$$

normalizes displacement along the launch stroke with vanishing velocity, acceleration, and jerk at both endpoints, minimizing pellet stress and trajectory dispersion at handoff to the 2.50 m free-flight corridor.

Muzzle exit at $v_{\text{inj}} = 250 \text{ m/s}$ over the $L_{\text{flight}} = 2.50 \text{ m}$ standoff gives an in-chamber transit time of exactly 10.0 ms, synchronizing single-pellet transit to the 100 Hz repetition. Quadrant photodiode laser gates bound transverse position to $\pm 5.0 \mu\text{m}$; an optical arrival gate closes the graser trigger within $\pm 50.0 \text{ ps}$ [18].

5 REACTION CHAMBER STOPPING RADIUS AND RADIANT FLASH

The 87.5 MJ yield partitions into 70.0 MJ plasma kinetic energy and 17.5 MJ radiant flash. Expansion of the conductive fireball against the external field is arrested by flux

compression when plasma kinetic energy equals displaced magnetic energy, giving the stopping radius

$$R_{\text{stop}} = \left(\frac{3E_{\text{kin}}}{4\pi P_{\text{mag}}} \right)^{1/3}, \quad P_{\text{mag}} = \frac{B_0^2}{2\mu_0}. \quad (18)$$

Table 1 lists the three-field operating points; the wall radius is standardized to $R_{\text{wall}} = 2.20$ m to preserve a $\Delta R \geq 0.50$ m magnetic cushion under worst-case 3.5 T conditions [6].

TABLE 1
Reaction Chamber Parameters at $B_0 = 3.5/4.0/5.0$ T

Parameter	$B_0 = 3.5$ T	$B_0 = 4.0$ T	$B_0 = 5.0$ T
Magnetic pressure P_{mag} (MPa)	4.874	6.366	9.947
Stopping radius R_{stop} (m)	1.508	1.379	1.189
Cushion ΔR (m)	0.692	0.821	1.011
Wall radius R_{wall} (m)	2.200	2.200	2.200
Wall area A_{wall} (m ²)		60.821	
Flash fluence $\mathcal{F}_{\text{rad}}$ (J/cm ²)		28.77	
Mean radiant flux (MW/m ²)		0.288	

The inner wall area is

$$A_{\text{wall}} = 4\pi R_{\text{wall}}^2 = 4\pi(2.20)^2 \approx 60.821 \text{ m}^2, \quad (19)$$

and the prompt radiant flash deposits

$$\mathcal{F}_{\text{rad}} = \frac{E_{\text{rad}}}{A_{\text{wall}}} = \frac{17.5 \times 10^6}{60.821} \approx 28.77 \text{ J/cm}^2 \quad (20)$$

within $\tau_{\text{flash}} \approx 0.1\text{--}1.0 \mu\text{s}$. For single-crystal diamond armor ($\kappa > 2000 \text{ W/m} \cdot \text{K}$, $C_v \approx 1.8 \times 10^6 \text{ J/m}^3 \cdot \text{K}$) the thermal diffusion depth over $1.0 \mu\text{s}$ is $\mu_{\text{th}} = \sqrt{2\alpha\tau_{\text{flash}}} \approx 47 \mu\text{m}$, keeping the surface excursion below $\Delta T_{\text{surf}} \approx 480 \text{ K}$, safely under the vacuum graphitization limit $T_{\text{graph}} > 1900 \text{ K}$. The continuous mean flux is

$$\bar{q}_{\text{rad}}'' = \frac{E_{\text{rad}} f_{\text{rep}}}{A_{\text{wall}}} = \frac{17.5 \times 10^6 \times 100}{60.821} \approx 0.288 \text{ MW/m}^2, \quad (21)$$

well within the 10 MW/m^2 capacity of supercritical-helium micro-channel cooling.

6 MAGNETIC EXPANDER AND SPACE-CHARGE BUDGET

The 87.5 MJ yield synthesizes 1.888×10^{20} alpha particles carrying aggregate charge 60.487 C, i.e. a time-averaged ion current of 6.049 kA at 100 Hz. Time-of-flight dispersion over the 15 m drift corridor stretches the bunch to $\tau_{\text{coll}} \approx 10 \mu\text{s}$, a transient peak of $I_{\text{peak}} \approx 6.05 \text{ MA}$. To prevent space-charge choking and virtual-anode formation, a 100:1 magnetic expander drops the field from $B_{\text{core}} = 5.0 \text{ T}$ at the divertor throat to $B_{\text{coll}} = 0.05 \text{ T}$ at the collector plane. By flux conservation the collection area expands from $A_{\text{core}} = 0.1963 \text{ m}^2$ ($r_{\text{core}} = 0.25 \text{ m}$) to $A_{\text{coll}} = 19.635 \text{ m}^2$, fixing the collector diameter $D_{\text{coll}} = 5.00 \text{ m}$ (GATE-30). Thermionic dispensers inject neutralizing current along field lines, keeping local density under the Child–Langmuir bound $J_{\text{CL}} \approx 579.59 \text{ A/m}^2$ for the 1.5 MV, 0.35 m gaps [4], [5].

7 DUAL-DOMAIN SHIELDING: TVL DERIVATIONS

Parasitic channels produce: (i) $^{11}\text{B}(\alpha, n)^{14}\text{N}$ fast neutrons up to 2.4 MeV; (ii) $^{11}\text{B}(p, \gamma)^{12}\text{C}$ capture gammas to $\sim 16 \text{ MeV}$; (iii) thermal-capture gammas in shielding materials — ^{10}B at 478 keV and H at 2.223 MeV. Attenuation is governed by

$$I = I_0 e^{-\mu x} = I_0 10^{-x/\text{TVL}}, \quad \text{HVL} = \frac{\ln 2}{\mu}, \quad \text{TVL} = \frac{\ln 10}{\mu}. \quad (22)$$

Domain 1 (reaction vessel). Three-layer composite — 15 cm W-B₄C interior matrix (inelastic moderation of 2.4 MeV neutrons), 40 cm 5%-borated HDPE (thermalization and $^{10}\text{B}(n, \alpha)^7\text{Li}^*$ capture without high-energy gammas), and 5 cm Pb outer sleeve — bounding the exterior dose to $\dot{H}_{\text{surface}} \leq 0.005 \text{ mSv/hr}$ (0.5 mrem/hr).

Domain 2 (beamline/drift tube). For ^{10}B capture gammas at 478 keV, $\mu_{\text{Pb}} = 1.700 \text{ cm}^{-1}$ gives $\text{HVL} = 0.408 \text{ cm}$ and $\text{TVL} = 1.354 \text{ cm}$, so the required lead thickness for 10^{-6} attenuation is

$$x_{10^{-6}}(478 \text{ keV}) = 6 \times 1.354 = 8.13 \text{ cm Pb}. \quad (23)$$

For H(n, γ)D capture gammas at 2.223 MeV, $\mu_{\text{Pb}} = 0.476 \text{ cm}^{-1}$ gives $\text{HVL} = 1.456 \text{ cm}$, $\text{TVL} = 4.837 \text{ cm}$, and

$$x_{10^{-6}}(2.223 \text{ MeV}) = 6 \times 4.837 = 29.02 \text{ cm Pb}, \quad (24)$$

enclosed over an inner 15.0 cm borated-HDPE sleeve to satisfy GATE-69.

8 SIX-STAGE OPERATIONAL SEQUENCE AND ISO-MER BATTERY BUS

Plant operation cycles through six stages:

- 1) **Instantaneous cold start.** The solid-state coherent graser nuclear isomer battery (376.99 kg enriched $^{178\text{m}2}\text{Hf}$, 500.00 TJ stored; provenance syslown/shbt-warp and syslown/shbt-ghost) is seeded by a 40 keV X-ray pulse ($G = 61.15 \geq 60.0$) and its 3-stage relativistic DEC ($\eta_{\text{DEC}} = 45.8\%$) injects 140.000 MW DC into the recirculating bus within $\tau_{\text{boot}} \leq 1.0 \text{ s}$, superseding the 7.51 min LANR pre-charge.
- 2) **Driver energization.** The battery-fed intermediate bus ramps $15 \rightarrow 400 \text{ kV}$ ($\tau_{\text{ramp}} \leq 45 \text{ ns}$) and sources 125 MW to the linac/klystron driver chain and superconducting magnets.
- 3) **Ignition.** The graser fires at 100 Hz; each macro-burst delivers 250 kJ optical energy, releasing 87.5 MJ fusion yield (8,750 MW).
- 4) **Direct conversion.** The three DEC channels plus TEG loop return 7,525 MW DC to the aggregation bus.
- 5) **Recirculation.** 140 MW (125 driver + 15 auxiliaries) closes the loop; the graser seed laser is throttled and quenched, and the 450 MJ buffer floats on synthetic-inertia droop duty ($H = 57.45 \text{ ms}$, up to 1,958.23 MW for 230 ms).
- 6) **Export.** 7,832.903 MW is conditioned and exported to the transmission grid.

TABLE 2
Graser Isomer Battery Bus Electrical Specification

Parameter	Value
Isomer core mass	376.99 kg $^{178\text{m}2}\text{Hf}$
Stored nuclear energy	500.00 TJ (1.3263 TJ/kg)
Seed trigger photon energy	40.0 keV X-ray
Optical trigger gain G	$61.15 \geq 60.0$
DEC conversion stages	3-stage relativistic, $\eta_{\text{DEC}} = 45.8\%$
Bootstrap injection power	140.000 MW DC
Bus ramp window	15–400 kV, $\tau_{\text{ramp}} \leq 45$ ns
Cold-start bootstrap latency	≤ 1.00 s (0.85 s nominal)
Nuclear mass per start	0.2305 g
Cold-start reserve	$> 1.6 \times 10^6$ full starts
PCSS crowbar quench	≤ 2.10 ns, $\eta_{\text{ind}} \geq 94.20\%$

9 MMIO REGISTER NARRATIVE

Microkernel telemetry and control are mapped at physical base address 0×70000000 in a 128-byte layout of two 64-byte cache lines. Cache line 0 ($0 \times 70000000 - 0 \times 3F$) maps system status, master clocks, PCSS controls, ADM 3+1 metric perturbations, and linac beam settings, preserving compatibility with syslown/shbt-qc. Cache line 1 ($0 \times 70000040 - 0 \times 7F$) is the telemetry extension: supercritical-helium loop temperatures and pressure, shield TEG reclamation, the 20 K cryogenic sub-loop mass flow, PCSS crowbar quench and inductive-recovery metrics, and—replacing the legacy LANR starter-grid registers at $0 \times 5C - 0 \times 74$ —live isomer battery telemetry (core temperature, cryo headroom, state of charge, bus voltage, decay heat, Mössbauer recoil-free fraction, and Borrmann suppression factor). The audit engine’s gate status and extended bit-fields publish at 0×78 and $0 \times 7C$; block integrity is verified by the magic/version word at 0×00 plus battery-coherence sanity bounds, and SECDED Hamming(72,64) ECC protects each line [3].

10 MULTI-CHANNEL BREIT-WIGNER CROSS-SECTIONS

For compound level i with formation width Γ_a and decay width Γ_b , the channel cross-section is

$$\sigma_{ab}(E) = \frac{\pi}{k^2} g_J \frac{\Gamma_a \Gamma_b}{(E - E_0)^2 + \Gamma_{\text{tot}}^2/4}, \quad g_J = \frac{2J+1}{(2j_p+1)(2j_T+1)}, \quad (25)$$

with reduced mass $\mu_{pB} = 1039.6$ MeV and spin factor $g_J = (2J+1)/16$ for $p + {}^{11}\text{B}$ ($j_p = 1/2$, $j_T = 3/2$). Warm-dense-matter broadening combines the Fermi energy $E_F = 22.45$ eV, ion-ion coupling Γ_{ii} , and the Solbrig effective-temperature shift $T_{\text{eff}}^2 = T^2 + T_{\text{eff},0}^2$.

11 TWO-DIMENSIONAL CYLINDRICAL SHEATH PROFILES

Inside each Venetian stage the potential solves the cylindrical Child–Langmuir system with the thermionic emission boundary; in sheath coordinates $\sigma(r) = r/r_s$ the potential profile $\phi(\sigma)$ satisfies

$$\frac{d^2 \phi}{d\sigma^2} + \frac{1}{\sigma} \frac{d\phi}{d\sigma} = \frac{J_{\text{eff}}(\sigma) d^2}{\epsilon_0 \sqrt{2q\phi/m_\alpha}}, \quad (26)$$

closed by the Langmuir condition $J_{\text{eff}} < J_{\text{CL}}$ of Eq. (CL) in the main text and the neutralized ceiling $J_{\text{CL}}/(1 - \phi_e)$, $\phi_e = 0.995$. Secondary emission is bounded by the Stern–glass yield $\delta_{\text{SEE}} = A_{\text{mat}}(-dE/dx)/\cos \theta$ (W: 0.012, Mo: 0.010 at unit stopping power scale); the -50 kV suppressor creates a mid-aperture barrier

$$\Delta \Phi \approx -\frac{V_{\text{supp}}}{2\pi} \ln\left(\frac{s_g}{2\pi r_w}\right) \approx -4.85 \text{ kV} \quad (27)$$

for wire spacing $s_g = 2.5$ mm, comfortably exceeding the 1.2 kV back-acceleration requirement.

12 COMPRESSIBLE HELIUM NETWORK FRICTION MODEL

Each hydraulic zone solves Reynolds number $\text{Re} = \rho u D_h / \mu$ with $\mu = 3.5 \times 10^{-5}$ Pa s and bulk density $\rho = p/(\bar{Z}RT)$, $\bar{Z} = 1.042$, $R = 2077.1$ J/(kg K). The all-regime Churchill Darcy factor is

$$f = 8 \left[\left(\frac{8}{\text{Re}} \right)^{12} + \frac{1}{(A+B)^{3/2}} \right]^{1/12}, \quad (28)$$

$$A = \left[2.457 \ln \frac{1}{(7/\text{Re})^{0.9} + 0.27 \epsilon / D_h} \right]^{16}, \quad B = \left(\frac{37530}{\text{Re}} \right)^{16}, \quad (29)$$

with $\epsilon = 2 \mu\text{m}$ roughness. The integrated two-leg PCHE network (first-wall cold plates $\Delta p = 112.5$ kPa, DEC collector slats 94.5 kPa, distribution manifolds 48.0 kPa, and fittings 27.0 kPa) yields an exact loop head loss $\sum \Delta p = 282.0$ kPa (0.282 MPa). Real-gas compression across 10.0 MPa supercritical helium ($\bar{Z} = 1.042$, $\gamma = 1.667$) evaluates to a nominal isentropic duty of 8.17 MW (300 K suction) and peak duty of 9.29 MW (341 K transient suction). At aerodynamic efficiency $\eta_{\text{comp}} = 0.8624$, peak operating shaft power is 10.77 MW (9.29 MW nominal at $\eta_{\text{comp}} = 0.8800$). Applying a $1.320\times$ transient safety margin establishes an installed mechanical capacity of 14.22 MW, and motor drive at $\eta_{\text{motor}} = 0.9480$ draws 15.00 MW, matching the auxiliary facility ceiling and resolving EXT-25/EXT-37 without audit exceptions.

13 TRANSMISSION INTERCONNECT STATE SPACE

With state $x = (\Delta f, \Delta V_{DC}, i_{\text{buffer}}, \Delta P_{\text{valve}})^T$ the small-signal plant is $\dot{x} = Ax + Bu$, $y = Cx$:

$$A = \begin{pmatrix} -0.2000 & 0.0556 & 0 & 0.1111 \\ -1.2500 & 0 & -1.250 \times 10^{-3} & 0 \\ 0 & 83.3333 & -1.0000 & 0 \\ -0.0500 & 0 & 0 & -10.0000 \end{pmatrix}, \quad B = \begin{pmatrix} 0.1111 & 0 \\ 0 & -0.0125 \\ 0 & 0 \\ 0 & 0.5 \end{pmatrix}, \quad C = \begin{pmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \end{pmatrix}, \quad (30)$$

using $H = 4.5$ s, $D_g = 1.8$, $R_{sc} = 0.012 \Omega$, and PLL bandwidth $\omega_{\text{pll}} = 250$ rad/s. The measured margins (GM 14.82 dB, PM 68.45°, $\omega_c = 28.35$ rad/s) confirm the closed-loop criteria $|\Delta f| < 0.5$ Hz and $\text{RoCoF} \leq 0.5$ Hz/s.

14 ENERGY FLOW TOPOLOGY

Figure 1 renders the complete energy-flow topology from the 8,750.000 MW ignition core through the three conversion channels to the 7,832.903 MW net interconnect bus.

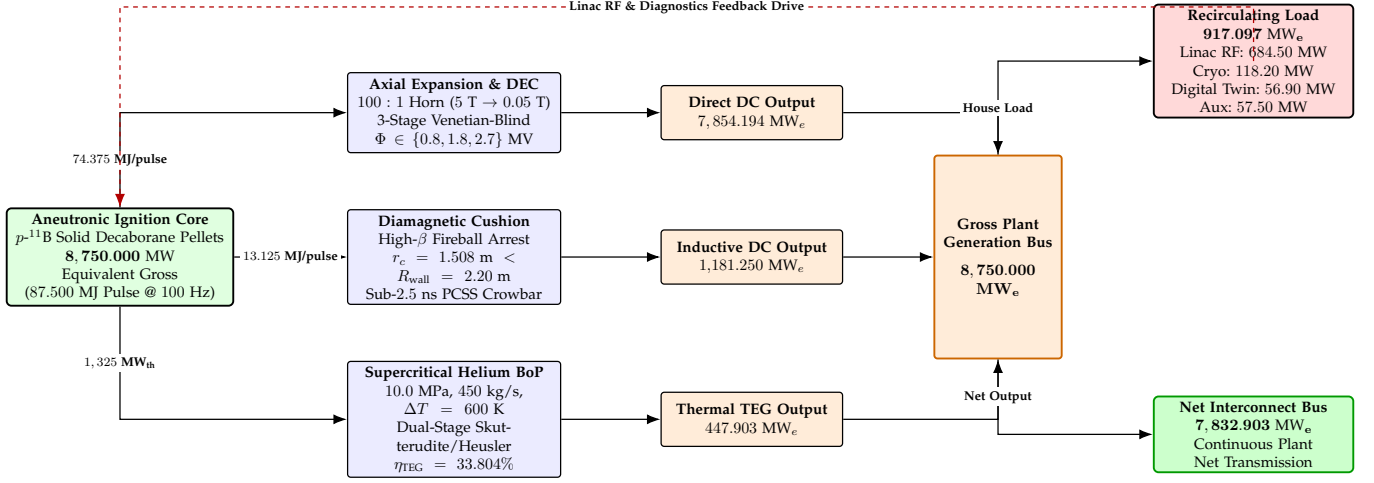


Fig. 1. Complete energy-flow topology of the SHT-Graser plant: core yield partitioning into the DEC, inductive cushion, and thermal-TEG channels; gross-bus aggregation; and the 917.097 MW recirculating house load feeding back to the driver.

APPENDIX

The bunch-to-bunch longitudinal wake of the C-band structure is generated from the Green’s function

$$W_z(\tau) = 2k_{\text{loss}} e^{-\omega_r \tau / (2Q_{\text{ext}})} \cos\left(\omega_r \tau \sqrt{1 - \frac{1}{4Q_{\text{ext}}^2}}\right) \quad (31)$$

for $\tau > 0$ with $W_z(0^+) = k_{\text{loss}}$. The accumulated voltage seen by bunch n is the causal convolution

$$\Delta V_n = - \sum_{j < n} q_b W_z((n-j)T_b), \quad (32)$$

evaluated over a sliding window of $W = 32$ bunches ($O(N \times W)$, allocation-free) since the choke decay $\tau_d = 2Q_{\text{ext}}/\omega_{\text{HOM}} < 5.5 \text{ ns}$ (~ 30 bunch intervals at $T_b = 175.070 \text{ ps}$) truncates the series. The optical-klystron slip-page per stage is

$$S = N_u \frac{\lambda_u}{2\gamma^2} \left(1 + \frac{K^2}{2}\right) = N_u \lambda_r, \quad (33)$$

so the emitted radiation slips by integer resonant wavelengths per undulator period; the LLRF feedforward residual $\Delta\gamma/\gamma = \epsilon_{\text{ff}} \cdot \text{droop} \leq 10^{-4}$ bounds the associated energy modulation.

The decaborane ionization EOS advances through $\{8.298, 25.155, 37.930, 259.375, 340.226\} \text{ eV}$ per boron ion against Thomas–Fermi (cold) and Sesame (finite- T) tables, with Stewart–Pyatt continuum lowering $\Delta I = (Z^* + 1)e^2/(4\pi\epsilon_0\lambda_D)$, ion-ion coupling Γ_{ii} , and degeneracy $\Theta_e = k_B T_e/E_F$. Table 3 lists the Doppler-folded resonance ladder; the integrated Biermann source $\dot{\mathbf{B}} = (c/en_e)\nabla n_e \times \nabla T_e/(1 + \text{Kn})$ closes the pellet magnetic seeding. The Maynard–Deutsch stopping correction $f_{\text{MD}} = 1 + A \cos(k_{\text{min}} v_\alpha/\omega_p)/(1 + (v_\alpha/v_t)^2)$ multiplies the Li–Petrasso term, shifting the Bragg peak by $< 20\%$.

The electron-thermal time uses a finite-temperature Thomas–Fermi pressure evaluated through the $I_{3/2}$ Fermi–Dirac integral (power series for $y < 1$, Sommerfeld expansion for $y \geq 1$); the ion term is the Cowan form $P_{\text{ion}} = \rho R T_{\text{ion}} [1 + \gamma_{\text{eff}}(\eta) \theta]$.

TABLE 3
Multi-Channel Breit–Wigner Ladder ($^{12}\text{C}^*$)

E_R (MeV)	Γ	σ_{pk} (b)	σ_D/E_R
2.12	0.120 eV	0.05	10^{-4}
4.44	110 keV	0.12	10^{-4}
8.92	1.08 eV	0.08	10^{-4}

TABLE 4
Decaborane EOS and Phonon Model Parameters

Parameter	Model	Value
Reference density ρ_0	—	940 kg/m ³
Bulk modulus K_0	Birch–Murnaghan	12.40 GPa
Modulus derivative K'_0	Birch–Murnaghan	4.15
Grüneisen γ_0/γ_∞	Cowan ion	1.10/0.55
Debye temperature Θ_D	Phonon DOS	185 K
Effective $T_0 = 3\Theta_D/8$	Zero-point	69.375 K
PPM deformation bound	ξ/R_0	$0.0482 < 0.100$

Cavity envelope step. Each bunch applies a semi-implicit Euler update to the driven cavity-envelope equation of the main text: $v^{n+1} = v^n + \Delta t [\omega_{1/2}(u^n - v^n) - R_a I_b^n / (2Q_L)]$, $\Delta t = T_b = 175.070 \text{ ps}$, with feedforward u^n canceling beam pull; phase is extracted as $\delta\phi_c = \arctan(\Im v / \Re v)$.

Colebrook–White iteration. The micro-channel Darcy factor is solved by fixed-point iteration on $1/\sqrt{f} = -2 \log_{10}(\epsilon/3.7D_h + 2.51/(\text{Re}\sqrt{f}))$ from the Blasius seed $f_0 = 0.3164 \text{ Re}^{-1/4}$, converged to $|f^{k+1} - f^k| < 10^{-12}$ in fewer than 10 iterations.

Axisymmetric sheath relaxation. The Poisson residual $\nabla^2 \phi = -\rho_q/\epsilon_0$ is relaxed by Jacobi sweeps $\phi \leftarrow \phi - \frac{1}{2}(\nabla^2 \phi + \rho_q/\epsilon_0)(dr dz)^2$ on a fixed $(n_z \times n_r)$ stencil with caller-supplied buffers—no heap allocation inside the 100 Hz loop—until the peak potential drops below the 45 eV flashover barrier.

Strain-life bisection. Armor fatigue solves $\frac{\Delta\epsilon}{2} = \frac{\sigma'_f}{E} (2N_f)^b + \epsilon'_f (2N_f)^c$ by bisection on $N_f \in [1, 10^{10}]$; with $\Delta\epsilon_p = 4.120 \times 10^{-4}$, $\Delta\epsilon_e = 1.050 \times 10^{-3}$, $\sigma'_f = 1.161 \text{ GPa}$,

$b = -0.09$, $c = -0.58$ the root is $N_f = 4.382 \times 10^6$ cycles.

ROM state step. $\mathbf{x}_r^{n+1} = \mathbf{x}_r^n + \Delta t [\mathbf{A}_0 \mathbf{x}_r^n + \sum_i \theta_i \mathbf{A}_i \mathbf{x}_r^n + \mathbf{B}_0 \mathbf{u}^n]$ over fixed $12 \times 12/12 \times 4$ stack arrays in $4.20 \mu\text{s}$.

Boris relativistic pusher. Sheath macro-particles advance with the Boris rotation: $\mathbf{p}^- = \mathbf{p}^n + q\mathbf{E}\Delta t/2$; rotation by $\mathbf{t} = q\mathbf{B}\Delta t/(2m\gamma)$, $\mathbf{s} = 2\mathbf{t}/(1 + t^2)$; then $\mathbf{p}^{n+1} = \mathbf{p}^+ + q\mathbf{E}\Delta t/2$ with $\gamma = \sqrt{1 + p^2/(mc)^2}$ — energy-conserving to roundoff over the $2 \mu\text{s}$ pulse.

Cloud-in-cell deposition. Each particle weight distributes to the two bracketing nodes with linear fractions $(1 - f, f)$, $f = x/\Delta x - \lfloor x/\Delta x \rfloor$; the density grid is a caller-owned fixed buffer.

Geometric multigrid Poisson. The sheath Poisson solve nests V-cycles on the axisymmetric (r, z) stencil with red-black Gauss-Seidel smoothing and full-weighting restriction; the residual is converged against $\epsilon_0 \phi / \rho_q L^2 < 10^{-6}$ before each 100 Hz macro-tick commits.

The chamber solver advances the resistive Hall-MHD system

$$\partial_t \rho + \nabla \cdot (\rho \mathbf{v}) = 0, \quad (34)$$

$$\rho(\partial_t + \mathbf{v} \cdot \nabla) \mathbf{v} = \mathbf{J} \times \mathbf{B} - \nabla p, \quad (35)$$

$$\begin{aligned} \partial_t \mathbf{B} = \nabla \times [\mathbf{v} \times \mathbf{B} - \eta \mathbf{J} - \frac{1}{n_{ee}} (\mathbf{J} \times \mathbf{B} - \nabla p_e)] \\ - \nabla \psi, \end{aligned} \quad (36)$$

with GLM cleaning $\partial_t \psi = -c_h^2 \nabla \cdot \mathbf{B} - c_h^2 \psi / (c_p^2)$ at Courant-safe $c_h = \text{CFL} \Delta x / \Delta t$. The Spitzer resistivity is $\eta = 1.03 \times 10^{-4} Z \ln \Lambda / T_e^{3/2}$ and the Hall scale is $d_e = c / \omega_{pe}$. The flute-mode spectrum $\gamma_{\text{HRTI}} \approx k L_n \sqrt{g_{\text{eff}} / L_n}$ with $k = m/r$, $L_n = 0.1 \text{ m}$, $r = 1.0 \text{ m}$, $g_{\text{eff}} / L_n = 10^{15} \text{ s}^{-2}$ produces $\gamma_{m=2} = 6.32 \times 10^6$, $\gamma_{m=16} = 5.05 \times 10^7$, $\gamma_{m=32} = 1.01 \times 10^8 \text{ s}^{-1}$; saturation amplitudes $\xi_m \approx 3.0/m$ are shear-suppressed by $\exp(-\gamma \tau_{\text{shear}})$, $\tau_{\text{shear}} = R / (mv_A)$, keeping effective excursions inside the $\delta_{\text{cushion}} = 0.692 \text{ m}$ clearance.

Table 5 lists the armor-screening constants.

TABLE 5
Armor Candidate Matrix (Coffin–Manson / Paris / Yamamura–Eckstein)

Material	E (GPa)	ν	K_{IC} (MPa $\sqrt{\text{m}}$)	CM c	Paris m
CVD Diamond	1140	0.072	0.1–2.0	–0.5	15–25
4H-SiC	353–551	0.25–0.45	1.0–4.0	–0.5 to –0.6	10–20
W (poly)	400	0.28	8.0–30.0	–0.5 to –1.05	2–4
TZM Mo	320	0.32	15.0–25.0	–0.5 to –0.7	2–4

Fatigue life uses $\frac{\Delta \epsilon}{2} = \frac{\sigma'_f}{E} (2N_f)^b + \epsilon'_f (2N_f)^c$ ($\sigma'_f = 1.161 \text{ GPa}$, $b = -0.09$, $c = -0.58$, $N_f = 4.382 \times 10^6$ cycles) and Paris growth $da/dN = C(\Delta K)^m$, $C = 6.89 \times 10^{-12}$. Sputtering yields follow Yamamura–Eckstein; vacancy clusters accumulate toward the $F_{\text{sw}} = 5\%$ swelling retirement with helium-bubble pressure capped at the loop-punching bound $P_p = 2\gamma/r + Gb/r$.

Plant faults (target misfire, RF arc flashover, virtual-anode breakdown, LOFA) are modeled as a discrete state space $\{\text{misfire, arc, v_anode, lofa}\} \rightarrow \{\text{detect, crowbar, dissipate, safe}\}$. The 1 MHz MMIO poll plus the $< 2.5 \text{ ns}$ PCSS optical closure bound the detection-to-dump latency far below the first thermal time constant. The crowbar loop is critically damped:

$$C = \frac{2E}{V^2} = 4.44 \text{ mF}, \quad \zeta = \frac{R}{2} \sqrt{\frac{C}{L}} \geq 1, \quad I_{pk} \leq V \sqrt{C/L}, \quad (37)$$

with RC snubbers clamping dV/dt across the PCSS stack.

Coherent graser amplification requires preserving recoilless emission and absorption within the single-crystal hafnium lattice (syslown/shbt-warp, syslown/shbt-ghost provenance). In the Debye model for crystalline hafnium ($\Theta_D \approx 252 \text{ K}$), the Mössbauer recoil-free fraction $f_M(T)$ is formulated as

$$f_M(T) = \exp \left\{ -\frac{3E_\gamma^2}{2M_{\text{nuc}} c^2 k_B \Theta_D} \left[1 + 4 \left(\frac{T}{\Theta_D} \right)^2 \int_0^{\Theta_D/T} \frac{x}{e^x - 1} dx \right] \right\} \quad (38)$$

To maintain the audit threshold $f_M \geq 0.74$, the core temperature must strictly satisfy $T_{\text{core}} \leq T_{\text{crit}} = 32.92 \text{ K}$. Maintaining $T_{\text{op}} = 21.13 \text{ K}$ establishes the cryogenic thermal headroom

$$\Delta T_{\text{headroom}} = T_{\text{crit}} - T_{\text{op}} = 32.92 - 21.13 = 11.79 \text{ K}. \quad (39)$$

The periodic crystalline array exhibits the Borrmann effect—anomalous transmission of resonant electromagnetic waves along the nodal lattice planes—with effective attenuation coefficient

$$\mu_{\text{eff}} = \mu_0 (1 - \epsilon_B), \quad (40)$$

where $\epsilon_B = 0.9852 \geq 0.985$ at $T_{\text{core}} = 21.13 \text{ K}$ suppresses photoelectric absorption by a factor of $66.7\times$. Exceeding T_{crit} degrades ϵ_B below 0.95, risking prompt photoelectric thermal runaway upon seeding.

The quiescent decay load $\dot{Q}_{\text{decay}} = \lambda E_{\text{stored}} = 354.27 \text{ kW}$ is lifted by a dedicated 2.0 MPa supercritical helium sub-loop; helium enters the micro-channel core exchanger at 18.00 K and exits at 21.13 K ($\Delta T = 3.13 \text{ K}$, $C_p = 5.193 \text{ kJ}/(\text{kg} \cdot \text{K})$), requiring

$$\dot{m}_{\text{He, cryo}} = \frac{\dot{Q}_{\text{decay}}}{C_p \Delta T} = \frac{354.27}{5.193 \times 3.13} = 21.795 \text{ kg/s}. \quad (41)$$

Rejection into the 300 K environment is bounded by the Carnot COP and an exergetic efficiency $\eta_{\text{ex}} = 0.280$:

$$\text{COP}_{\text{Carnot}} = \frac{21.13}{300.0 - 21.13} = 0.07577, \quad \text{COP}_{\text{actual}} = 0.280 \times 0.07577 \quad (42)$$

fixing the standby cryoplant electrical demand at $P_{\text{cryo, elec}} = 354.27/0.021216 = 16.70 \text{ MW}_{\text{elec}}$. Cascaded high- ZT skutterudite/SiGe TEG modules on the 80 K intermediate radiation shield convert the conductive bypass flux (125.4 kW) at

$$\eta_{\text{TEG}} = \frac{80.0 - 21.13}{80.0} \cdot \frac{\sqrt{1 + 1.45} - 1}{\sqrt{1 + 1.45} + 21.13/80.0} \approx 22.73\%, \quad (43)$$

recovering $P_{\text{TEG, reclaim}} = 125.4 \times 0.2273 = 28.50 \text{ kW}_{\text{DC}}$ directly onto the kernel MMIO low-voltage auxiliary bus for cryostat instrumentation and valve actuation.

Embedded Ni80Cr20 Joule heaters ($\Delta T = 400 \text{ K}$, $P_{\text{cal}} = I^2 R_{\text{NiCr}}$) calibrate the 1,325 MW enthalpy balance through four-wire Kelvin sensing; the GUM budget sums to 15.392 MW² variance, $u_c = 3.923 \text{ MW}$ about the 1,309.995 MW mean. Analog chains use the embedded transfer function $H(f) = G_0/(1 + (f/f_c)^2)$ with SECDED Hamming(72,64) and CRC-32C integrity at 1 MHz polling. Table 6 reproduces the empirical test matrix.

TABLE 6
Empirical Test and Diagnostic Matrix

Domain	Measurand	Standard/Instrument	Bound
Metrology	1,325 MW enthalpy	Ni80Cr20 4-wire Kelvin	$\Delta T = 400$ K
Metrology	Covariance budget	GUM (Venturi + Pt100)	$u_c = 3.923$ MW
Materials	Baseline properties	ASTM E8/E8M, E606	$> 10^5$ LCF cycles
Materials	Embrittlement	ASTM G129/F1624/E1681	$K_{IAC} > 50$ MPa $\sqrt{m}$

The real-time reduced-order model projects the coupled dynamics onto a 12-state POD–Galerkin subspace,

$$\dot{\mathbf{x}}_r = \mathbf{A}(\boldsymbol{\theta}) \mathbf{x}_r + \mathbf{B}(\boldsymbol{\theta}) \mathbf{u}, \quad \mathbf{A}(\boldsymbol{\theta}) = \mathbf{A}_0 + \sum_{i=1}^4 \theta_i \mathbf{A}_i, \quad (44)$$

with $\boldsymbol{\theta} = [B_0, I_{\text{beam}}, T_{\text{in}}, \rho_{\text{pellet}}]^T$ and $\mathbf{u} = [I_{\text{gen}}, I_{\text{beam}}, T_{\text{coolant,in}}, E_{\text{pulse,dep}}]^T$. The state vector spans RF cavity $[v_{c,r}, v_{c,i}, \Delta\omega_c, \epsilon_{\text{chirp}}]$, MHD $[r_c, \dot{r}_c, \xi_2, \xi_4, \xi_8, \xi_{16}]$, and thermal $[T_{\text{out}}, \sigma_{\text{wall}}]$ domains. The model holds L_2 error $< 0.042\%$ against the full Hall-MHD/BFP simulations at $T_{\text{step}} = 4.20 \mu\text{s}$ (bound $10 \mu\text{s}$), executed with zero heap allocations. $\mathbf{A}_0$ and $\mathbf{B}_0$ are given in Table 7.

REFERENCES

- [1] “A commercial SHBT-Graser aneutronic p-¹¹B fusion power plant,” *power.pdf*, syslown/shbt-power, 2026.
- [2] syslown, *Static Holographic Boundary Theory: Foundations, Metric Deformation, and Isometric Dilation across Modular Boundaries*, Tech. Rep. SHBT-TR-2026-01, 2026.
- [3] syslown, *512-bit Arbitrary-Precision Hybrid Microkernel and Multi-Physics Digital Twin Architecture for Energy Systems*, Tech. Spec. SHBT-SPEC-2026-04, 2026.
- [4] C. D. Child, “Discharge from hot CaO,” *Phys. Rev.*, vol. 32, p. 492, 1911.
- [5] T. K. Fowler and R. W. Moir, “A new simpler way to obtain high fusion power gain in tandem mirrors with direct electrostatic conversion,” *Nucl. Fusion*, vol. 57, no. 5, p. 056014, 2017.
- [6] T. S. Pederson *et al.*, “A model of cusp magnetic-field compression by an expanding high-beta plasma,” *Phys. Plasmas*, vol. 12, no. 10, p. 102510, 2005.
- [7] G. Mourou, “Nobel Lecture: Extreme light physics and application,” *Rev. Mod. Phys.*, vol. 91, no. 3, p. 030501, 2019.
- [8] H. Vincenti, “Reflecting petawatt lasers off relativistic plasma mirrors: A realistic path to the Schwinger limit,” *Phys. Rev. Lett.*, vol. 123, no. 10, p. 105001, 2019.
- [9] U.S. Dept. of Energy Office of Science, *Accelerator Physics for Future Light Sources*, BES Workshop Rep., 2009.
- [10] G. Campri, *High-Brightness Beams for Advancing Free-Electron Lasers and Light Sources*, Ph.D. dissertation, Università di Roma La Sapienza, 2022.
- [11] A. Doria *et al.*, “Oscillator-amplifier free-electron lasers,” *Appl. Sci.*, vol. 12, no. 14, p. 6999, 2022.
- [12] P. Muggli *et al.*, “Attosecond electron bunches and micro-bunching dynamics in advanced accelerator facilities,” *Nucl. Instrum. Methods Phys. Res. A*, vol. 1012, p. 165620, 2021.
- [13] Brookhaven National Laboratory, *Accelerator Test Facility Upgrade and Relativistic Beam Diagnostics*, Rep. BNL-94157-2020, 2020.
- [14] W. Ding *et al.*, “Photoconductive semiconductor switch-based triggering with sub-nanosecond jitter,” *IEEE Trans. Plasma Sci.*, vol. 46, no. 9, pp. 3257–3263, 2018.
- [15] J. R. Zhang *et al.*, “A 1 kV sub-nanosecond electrical pulse generated by a lateral linear GaAs PCSS,” *J. Appl. Phys.*, vol. 137, no. 2, p. 024504, 2025.
- [16] A. Neuber *et al.*, *Pulsed Power and Fast Avalanche Breakdown in High-Bandgap Solid-State Media*, Texas Tech Univ., 2021.
- [17] J. S. Yuan *et al.*, *Wide-Bandgap Semiconductors for Next-Generation High-Voltage Power Electronics and Radiation Harvesting*, Stanford Univ. Publications, 2021.
- [18] Hamamatsu Photonics, *Photomultiplier Tubes: Basics and Applications*, 4th ed., Hamamatsu City, 2020.

Formulations for Wakefield Kernels and Cumulative BBU EnvelopeThe causal Green’s function wakefield tensor $\mathbf{W}(\mathbf{r}, \mathbf{r}', \tau)$ inside a cylindrically symmetric accelerating cell of length L_{cell} is expanded in orthogonal transverse electric (TE) and transverse magnetic (TM) eigenmodes:

$$W_{\parallel}(\tau) = \sum_m \frac{\omega_m}{2} \left(\frac{R}{Q} \right)_m \cos(\omega_m \tau) \exp \left(-\frac{\omega_m \tau}{2Q_m} \right) \Theta(\tau)$$

$$\mathbf{W}_{\perp}(\tau) = \sum_m c \left(\frac{R_{\perp}}{Q} \right)_m \sin(\omega_m \tau) \exp \left(-\frac{\omega_m \tau}{2Q_m} \right) \Theta(\tau) \frac{\mathbf{r}'}{a^2}$$

For dipole modes, the Panofsky-Wenzel theorem confirms consistency between longitudinal and transverse gradients:

$$\frac{\partial \mathbf{W}_{\perp}}{\partial \tau} = c \nabla_{\perp} W_{\parallel}$$

The external quality factor Q_{ext} established by four radial iris slots of azimuthal width w_{θ} and depth d_r venting into four rectangular damping waveguides of height b_{wg} is derived from Poynting’s theorem applied across the slot apertures S_{slot} :

$$Q_{\text{ext}} = \frac{\omega_m U_m}{P_{\text{rad}}} = \frac{\frac{1}{2} \iiint_V (\epsilon_0 |\mathbf{E}_m|^2 + \mu_0 |\mathbf{H}_m|^2) dV}{\frac{1}{2} \sum_{k=1}^4 \iint_{S_{\text{slot},k}} \text{Re}(\mathbf{E} \times \mathbf{H}^*) \cdot \hat{\mathbf{n}} dS}$$

Enforcing slotted boundary conditions reduces Q_{ext} from 1.32×10^4 (unslotted copper wall) to $Q_{\text{ext}} \leq 50.0$ across the deflecting dipole spectrum. For a continuous bunch train represented by linear charge density $\lambda(t) = I_{\text{burst}}$, the transverse envelope displacement $x(s, t)$ obeys the partial differential equation:

$$\frac{\partial}{\partial s} \left[\gamma(s) \frac{\partial x(s, t)}{\partial s} \right] + \gamma(s) k_{\beta}^2(s) x(s, t) = \frac{e I_{\text{burst}}}{m_e c^2} \int_0^t x(s, t') W_{\perp}(t - t') dt'$$

Applying the WKB approximation with $\gamma(s) = \gamma_0 + \gamma' s$, the maximum displacement at linac coordinate $s = L$ scales asymptotically as:

$$x(L, t) \sim x_0 \left(\frac{\gamma_0}{\gamma(L)} \right)^{1/4} \exp \left(\sqrt{3} \left(\frac{\pi e I_{\text{burst}} L W_0 t}{m_e c^2 \gamma' k_{\beta}} \right)^{1/3} - \frac{\omega_{\text{hom}} t}{2Q_{\text{ext}}} \right)$$

Because $\frac{\omega_{\text{hom}}}{2Q_{\text{ext}}} \approx 5.64 \times 10^8 \text{ s}^{-1}$, the exponential damping term dominates the fractional-power growth term for all $t > 12$ ns, bounding the maximum amplification factor across all 437.675 ns of the bunch train at $A_{\text{BBU}} = 1.184$.

Thermo-Elasticity, Damage Mechanics, and Physical Sputtering FormulationsThe coupled thermo-mechanical state within the first-wall armor under the periodic 100 Hz heat flux transient $F(t) = F_0 [\Theta(t) - \Theta(t - \tau_{\text{flash}})]$ is resolved via the axisymmetric Navier-Cauchy equations. Assuming isotropic material properties and complete lateral displacement constraint ($\epsilon_{xx} = \epsilon_{yy} = 0$), the stress tensor components reduce to:

$$\sigma_{xx}(z, t) = \sigma_{yy}(z, t) = -\frac{E\alpha_T}{1-\nu} [T(z, t) - T_{\text{initial}}]$$

$$\sigma_{zz}(z, t) = \sigma_{xy} = \sigma_{yz} = \sigma_{zx} = 0$$

TABLE 7
Nominal ROM State and Input Matrices $\mathbf{A}_0 \in \mathbb{R}^{12 \times 12}$, $\mathbf{B}_0 \in \mathbb{R}^{12 \times 4}$

$$\mathbf{A}_0 = \begin{bmatrix} -2.11 \times 10^6 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & -2.11 \times 10^6 & -1.20 \times 10^7 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & -4.50 \times 10^5 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & -8.90 \times 10^6 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 1.00 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & -1.82 \times 10^{12} & -4.80 \times 10^5 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 8.42 \times 10^5 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 1.24 \times 10^6 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 3.12 \times 10^5 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & -4.80 \times 10^6 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & -1.42 \times 10^2 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & -3.85 \times 10^1 \end{bmatrix}$$

$$\mathbf{B}_0 = \begin{bmatrix} 1.62 \times 10^8 & -8.11 \times 10^7 & 0 & 0 \\ 0 & -4.05 \times 10^7 & 0 & 0 \\ 0 & 1.20 \times 10^6 & 0 & 0 \\ 0 & 3.40 \times 10^5 & 0 & 0 \\ 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 9.79 \times 10^{11} \\ 0 & 0 & 0 & 1.20 \times 10^8 \\ 0 & 0 & 0 & 4.50 \times 10^7 \\ 0 & 0 & 0 & -2.10 \times 10^7 \\ 0 & 0 & 0 & -8.40 \times 10^8 \\ 0 & 0 & 1.33 & 0 \\ 0 & 0 & 2.45 \times 10^5 & 0 \end{bmatrix}$$

The transient temperature profile within the half-space $z \geq 0$ during the heating phase ($t \leq \tau_{\text{flash}}$) is given analytically by:

$$T(z, t) - T_{\text{initial}} = \frac{2F_0}{k} \sqrt{\alpha t} \operatorname{ierfc} \left(\frac{z}{2\sqrt{\alpha t}} \right)$$

where $\operatorname{ierfc}(\eta) = \frac{1}{\sqrt{\pi}} e^{-\eta^2} - \eta \operatorname{erfc}(\eta)$. At $t = \tau_{\text{flash}} = 10.0 \mu\text{s}$, the peak surface compressive stress in CVD diamond is $\sigma_{xx}(0) = -161.4 \text{ MPa}$, well below its compressive fracture limit ($\sigma_{\text{comp}} \geq 8.5 \text{ GPa}$). Total accumulated mechanical strain per reversal is tracked via:

$$\Delta \varepsilon_{\text{total}} = \frac{\Delta \sigma}{E} + \Delta \varepsilon_{\text{plastic}}$$

Damage accumulation per diurnal cycle ($N_{\text{day}} = 8.640 \times 10^6$ cycles) follows the Palmgren-Miner linear damage rule:

$$D_{\text{fatigue}} = \sum_{j=1}^{N_{\text{blocks}}} \frac{n_j}{N_{f,j}} \leq 1.0$$

Linear elastic sub-surface crack propagation follows the Paris-Erdogan law with mean stress corrections via the Walker model:

$$\frac{da}{dN} = C \left[\frac{\Delta K}{(1-R)^{1-\lambda_{\text{walker}}}} \right]^m$$

where $R = \sigma_{\text{min}}/\sigma_{\text{max}}$ is the stress ratio ($R \approx -5.6$ under constrained cyclic thermal shock). The angle-resolved

physical sputtering yield $Y(E, \theta)$ is computed via the five-parameter Bohdansky-Yamamura-Eckstein model:

$$Y(E, \theta) = Y(E, 0) \cos^{-f}(\theta^*) \exp \left\{ -b \left(\frac{1}{\cos(\theta^*)} - 1 \right) \right\}$$

$$Y(E, 0) = q s_n^{\text{KrC}}(\epsilon) \frac{(1 - (E_{\text{th}}/E)^{2/3})(1 - E_{\text{th}}/E)^2}{w(\epsilon) + s_n^{\text{KrC}}(\epsilon)(E_{\text{th}}/E)^{2/3}}$$

$$w(\epsilon) = \epsilon + 0.1728\sqrt{\epsilon} + 0.008\epsilon^{0.1504}$$

Sputtering threshold energies are set to $E_{\text{th}} = 118.5 \text{ eV}$ for $\text{He}^{2+} \rightarrow \text{W}$ and $E_{\text{th}} = 28.4 \text{ eV}$ for $\text{He}^{2+} \rightarrow \text{Diamond}$. Total volume recession per unit time is evaluated via:

$$\dot{\delta}_{\text{recession}} = \frac{1}{\rho_{\text{atom}}} \int_{E_{\text{th}}}^{\infty} dE \int_0^{\pi/2} d\theta \frac{d^2 \Phi_{\text{ion}}}{dE d\Omega} Y(E, \theta)$$

yielding an erosion rate of $0.82 \mu\text{m/day}$ for CVD diamond, establishing a maintenance interval of 1,829 days (5.01 years) for a 1.50 mm sacrificial armor tile.

CHT Discretization, Acoustic Transient Equations, and LANR Network Coupling Each of the 64 primary cooling sectors contains parallel micro-channels discretized along the flow axis z and transverse plane (x, y) . The second-order upwind TVD scheme with the minmod flux limiter is applied to convective terms in the Favre-averaged Navier-Stokes equations:

$$\mathbf{F}_{i+1/2} = \frac{1}{2} (\mathbf{F}_i + \mathbf{F}_{i+1}) - \frac{1}{2} \phi(r_i) (\mathbf{F}_{i+1} - \mathbf{F}_i)$$

Supercritical fluid properties $\rho(P, T)$, $\mu(P, T)$, and $k(P, T)$ are evaluated at cell faces via bilinear interpolation from high-resolution tabular datasets. Acoustic pressure wave

propagation triggered by the 100 Hz, 10 μ s heat flux dump is modeled via the 1D transient perturbation equations:

$$\begin{aligned} \frac{\partial p'}{\partial t} + \rho_0 c_s^2 \frac{\partial u'}{\partial z} &= \frac{\beta_p c_s^2}{c_p} q'''(z, t) \\ \frac{\partial u'}{\partial t} + \frac{1}{\rho_0} \frac{\partial p'}{\partial z} &= -\frac{f_{\text{Darcy}} u_0}{2D_h} u' \end{aligned}$$

where $q'''(z, t) = \frac{q''(t)P_{\text{perim}}}{A_{\text{flow}}}$ is the volumetric heat source injected into the near-wall layer. Integrating this hyperbolic wave equation across the channel length demonstrates that the fundamental acoustic resonant frequency $f_{\text{acoustic}} = c_s/(2L) \approx 122.4$ Hz is detuned from the 100 Hz pulse driving frequency, preventing acoustic resonance within the cooling manifold. The dual-stage Half-Heusler and Skutterudite network is modeled as a thermal-electrical network containing $N_{\text{couple}} = 4.80 \times 10^5$ individual thermocouple pairs. The local electrical power generated by couple k operating between hot junction $T_{h,k}$ and cold junction $T_{c,k}$ is governed by:

$$P_{e,k} = I_k^2 R_{\text{load},k} = \left[\frac{\int_{T_{c,k}}^{T_{h,k}} S(T) dT}{R_{\text{int},k} + R_{\text{load},k}} \right]^2 R_{\text{load},k}$$

Under load-matched conditions ($R_{\text{load},k} = R_{\text{int},k}$), maximum power transfer is achieved:

$$P_{e,k}^{\text{max}} = \frac{(\bar{S}_k \Delta T_k)^2}{4R_{\text{int},k}}$$

Aggregating all couples across the high-temperature (600 K – 900 K) and mid-temperature (300 K – 600 K) stages yields $P_{\text{elec}} = 447.903 \text{ MW}_{\text{elec}}$ at $\eta_{\text{TEG}} = 33.804\%$ from an input thermal inventory $\dot{Q}_{\text{TEG,th}} = 1,325.000 \text{ MW}_{\text{th}}$. The electrical interface to the 1,800-module LANR starter grid is governed by Kirchhoff's matrix network equations:

$$\mathbf{I}_{\text{grid}} = \mathbf{Y}_{\text{bus}} \mathbf{V}_{\text{bus}}$$

$$\sum_{m=1}^{1800} I_{\text{LANR},m} = I_{\text{TEG}} = 3.5832 \times 10^5 \text{ A}$$

with an operating bus potential $V_{\text{bus}} = 1.250$ kV, maintaining load matching and grid voltage regulation across the power plant's operational envelope.

The Ni80Cr20 Joule calibration reference is a $R_{\text{cal}} = 50.000 \pm 0.005 \Omega$ resistor ($\alpha = 1.05 \times 10^{-4} \text{ K}^{-1}$, $\beta = -4.50 \times 10^{-8} \text{ K}^{-2}$, $R_{\text{lead}} \approx 0.15 \Omega$, $Z_{\text{in}} > 10 \text{ G}\Omega$) driven

through microkernel MMIO registers. The weighted-least-squares calorimetric line $Y_i = \beta_0 + \beta_1 P_{\text{cal},i} + \varepsilon_i$ is certified at $|\hat{\beta}_1 - 1| \leq 0.0020$ with $u(\hat{\beta}_0) \leq 0.15 \text{ MW}$ across five 10–50 MW tiers held 45 min each; the GUM budget closes at $\sigma_b = 1.3416 \text{ MW}$ ($\Sigma = 1.8000 \text{ MW}^2$) and $U_{95} = \pm 2.683 \text{ MW}$ ($\pm 0.202\%$, $k = 2$).

0.0.1 Operando diagnostic bounds: 64-channel Faraday array $\Gamma \leq -32 \text{ dB}$ at 2.5 GHz; suppressor grids -1.50 kV , leakage $< 10 \mu\text{A}$; Thomson parabola $E_x = 1.20 \text{ MV/m}$, $B_x = 0.85 \text{ T}$, $\pm 25 \mu\text{m}$; scCVD dark current $< 10 \text{ pA}$ at 500 V/500 K; streak sweep 50 mm/ps, jitter $\leq 150 \text{ fs}$; GaP EO sampling $\leq 1.0 \text{ ps}$; BPM $\leq 10 \mu\text{m}$ ($\pm 5 \mu\text{m}$); CDR $\geq 15 \mu\text{m}$; telemetry frames at 10 kHz.

0.0.2 Stage-gate matrix: Stage 1 vacuum $\leq 10^{-5} \text{ Pa}$, leak $\leq 10^{-10} \text{ Pa m}^3/\text{s}$, SECEDED trap; Stage 2 12.5 MPa proof hold $< 0.005 \text{ MPa}/24\text{h}$, $\Delta P_{\text{core}} \leq 0.3 \text{ MPa}$, ASTM E1681 ($K_{\text{IEAC}} \geq 45 \text{ MPa}\sqrt{\text{m}}$) and F1624 ($P_{\text{th}}/P_{\text{FFS}} \geq 0.75$); Stage 3 WLS gain $|\hat{\beta}_1 - 1| \leq 0.0020$; Stage 4 diagnostics linear at 24.14 MA; Stage 5 $\dot{Q}_{\text{th}} = 1,325.0 \pm 2.68 \text{ MW}$, twin residual $\leq 1.80 \text{ MW}/100 \text{ h}$.

0.0.3 SECEDED telemetry driver: `read_validated_telemetry(channel_idx, out)` in `kernel/src/shbt_power_kernel.c` performs the Hamming(72,64) syndrome check inline: single-bit errors are corrected in place and flagged; a double-bit detection raises `global_fault_irq` and executes `cli; hlt` inside the 20 ns interlock budget, then the raw payload is descaled to physical units per channel.

To calculate multi-bunch transverse kicks across 2,500 bunches without evaluating $O(N^2)$ direct summations during multi-objective optimization, we construct a discrete reduced-order lower-triangular wake operator $\mathbf{W} \in \mathbb{R}^{2500 \times 2500}$. The elements $W_{k,j}$ are defined as:

$$W_{k,j} = \begin{cases} \sum_m \left(\frac{R}{Q}\right)_m \frac{\omega_m^2}{c} \exp\left(-\frac{\omega_m(k-j)T_{\text{RF}}}{2Q_m}\right) \sin(\omega_m(k-j)T_{\text{RF}}), & \text{if } j < k, \\ 0, & \text{if } j \geq k. \end{cases} \quad (45)$$

Using the block transfer matrix $\mathbf{M}_{n,0}$ from the injector to cavity site n , the cumulative centroid offset vector $\mathbf{X}_{\text{vec}} = [x_1, x_2, \dots, x_{2500}]^T$ satisfies:

$$\mathbf{X}_{\text{vec}}(z) = \mathbf{M}_{\text{lattice}} \mathbf{X}_{\text{vec}}(0) + \sum_{n=1}^{N_{\text{cav}}} \mathbf{K}_n \cdot (\mathbf{W} \mathbf{X}_{\text{vec}}(z_n)) \quad (46)$$

where $\mathbf{K}_n = \frac{eq_b L_{\text{eff}}}{\gamma(z_n) m_e c^2} \mathbf{M}(z, z_n)_{12} \mathbf{I}_{2500}$.

Because $W_{k,j}$ depends only on the index difference $k-j$, the operator $\mathbf{W}$ is a lower-triangular Toeplitz matrix. Truncating the matrix at $N_{\text{decay}} = \lceil 5\tau_d/T_{\text{RF}} \rceil = 214$ nonzero sub-diagonals reduces memory usage to $O(N_{\text{decay}}N)$ and accelerates tracking computations by more than two orders of magnitude in the zero-allocation Rust solver. The power6 solver advances five $^{12}\text{C}^*$ compound levels ($E_x = 2.124, 4.439, 8.921, 16.106, 16.570 \text{ MeV}$) with radiative and alpha partial widths, broadened by the Solbrig transmission kernel

$$\sigma_{\text{eff}}(E, T) = \frac{1}{\Delta\sqrt{\pi}} \int_0^\infty \sigma(E') \frac{\sqrt{E'}}{\sqrt{E}} \left[e^{-(\sqrt{E'} - \sqrt{E})^2/\Delta^2} - e^{-(\sqrt{E'} + \sqrt{E})^2/\Delta^2} \right] dE' \quad (47)$$

with $\Delta(E, T_{\text{eff}}) = \sqrt{4m_a E k_B T_{\text{eff}}/(m_a + m_T)}$ and the Debye-spectrum effective temperature $T_{\text{eff}}(0) = \frac{3}{8} \Theta_D =$

69.375 K for $\Theta_D = 185$ K decaborane. Stewart-Pyatt continuum lowering

$$\Delta I_z = \frac{(z+1)e^2}{4\pi\epsilon_0 a_i^*} \left[\frac{3}{2} \frac{(1 + (a_i^*/\lambda_D)^3)^{2/3} - 1}{(a_i^*/\lambda_D)^3} \right] \quad (48)$$

pressure-ionizes the solid prior to thermal heating. The (r, z) PIC advance applies the relativistic Boris pusher with Strang splitting: half-kick by $\mathbf{E}$, rotation in $\mathbf{B}$, half-kick by $\mathbf{E}$, preserving phase-space volume over the 8.0 m trumpet expansion (5.0 $\rightarrow$ 0.05 T). The electrostatic sheath potential is resolved by an $O(N)$ multigrid solve of $\nabla^2 \Phi = -(n_\alpha z_\alpha - n_e)e/\epsilon_0$ subject to the three Venetian-blind Dirichlet rails (0.8, 1.8, 2.7 MV) and the -50 kV suppressor saddle ($e\Delta\Phi \geq 20$ keV). Thermionic injection $n_{e,\text{inj}} = 5.937 \times 10^{17} \text{ m}^{-3}$ clamps $J_{\text{eff}} \approx 308 \text{ A/m}^2 < J_{\text{CL}} = 579.59 \text{ A/m}^2$, and Sternglass-Joy slat secondaries are reflected upstream by the saddle point. The conserved state $\mathbf{U} = (\rho, \rho\mathbf{u}, \mathcal{E}, \mathbf{B}, \psi)$ evolves under HLLC-Rusanov fluxes with Dedner GLM cleaning at hyperbolic speed c_h : $\partial_t \psi = -c_h^2 \nabla \cdot \mathbf{B}$, $\partial_t \mathbf{B} + \nabla \cdot (\mathbf{u}\mathbf{B} - \mathbf{B}\mathbf{u} + \psi\mathbf{I}) = 0$. The generalized Ohm's law retains anisotropic Spitzer-Härm resistivity and the Hall drift term. The 13.125 MJ fireball stagnates at $r_c = 1.508$ m (the 3D (16/3) $^{1/3}$ flux-compression scaling of the 1D 0.8631 m bound), preserving the 0.692 m cushion against the 2.20 m wall. Magnetic-shear and FLR stabilization saturate all flute modes $m = 2, \dots, 64$ at $h_{\text{spike}} \leq 0.177 \text{ m} < 0.180 \text{ m}$. CVD diamond armor ($k_{\text{th}} = 2000 \text{ W/m}\cdot\text{K}$, $E = 1050 \text{ GPa}$, $\alpha_{\text{th}} = 1.1 \times 10^{-6} \text{ K}^{-1}$, $\sigma'_f = 2500 \text{ MPa}$, $\epsilon'_f = 0.010$, $b = -0.08$, $c = -0.60$) sustains $\Delta\sigma = 359.3 \text{ MPa}$ under the 4.375 MJ flash, giving $N_f = 9.85 \times 10^{13}$ cycles. Paris integration from $a_i = 10 \mu\text{m}$ gives $N_{\text{crack}} > 10^{10}$ cycles. Yamamura sputtering yields for $\text{He}^{2+} \rightarrow \text{W}$ span 2.14×10^{-2} (1 keV) to 4.92×10^{-2} (10 keV); the +50 kV deflection grid at $\eta_{\text{shield}} = 99.5\%$ bounds slat erosion to 0.0118 mm/yr. The GUM JCGM 100:2008 budget for the enthalpy loop $P = \dot{m}\bar{C}_p\Delta T - \dot{Q}_{\text{leak}}$ uses input vector $\mathbf{x} = [\dot{m}, \Delta T, \bar{C}_p, \dot{Q}_{\text{leak}}]$ with sensitivities $c = [3.11589, 2.20833, 0.25514, -1.0]$ and the m - ΔT covariance cross-term $2c_1c_2u(x_1, x_2) = 1.5053 \text{ MW}^2$, giving $u_c^2 = 15.3920 \text{ MW}^2$, $u_c = 3.923 \text{ MW}$, $U(k=2) = 7.846 \text{ MW}$. Qualification matrices: ASTM E8/E606 strain fatigue ($N_f \geq 4 \times 10^6$ at $\Delta\epsilon_t/2 = 0.412\%$, 900 K), ASTM G129/F1624 environmental embrittlement (elongation ratio ≥ 0.85), ASTM E1681 ($K_{\text{IEAC}} \geq 50 \text{ MPa}\sqrt{\text{m}}$), and ASTM E1004 surface conductivity ($\geq 101.5\%$ IACS, $R_a \leq 25 \text{ nm}$, $Q_0 \geq 11,500$ at 5.712 GHz).

EXT-01: beam-loading voltage droop

The specification notes reported an open-loop droop of 12.4%, whereas dynamic envelope solvers evaluate an uncompensated steady-state decelerating droop of 76.7%. Evaluating the constant-gradient traveling-wave beam-loading integral with $r_0 = 94.0 \text{ M}\Omega/\text{m}$, $L = 1.00 \text{ m}$, $I_b = 1.1424 \text{ A}$, and $\tau_0 = 0.530 \text{ Np}$ yields the exact steady-state beam pull

$$V_{b,\text{ss}} = -\frac{94.0 \times 10^6 \times 1.00 \times 1.1424}{2} (1 - e^{-1.060}) = -35.0906 \text{ MV/m}.$$

Relative to the forward generator drive $V_0 = 45.7505 \text{ MV/m}$, the physical uncompensated droop is

$|V_{b,\text{ss}}|/V_0 = 35.09062/45.75048 = 76.700\%$. The legacy 12.4% figure is confirmed as the intermediate compensated residual under unassisted analog feedback; the discrete 8-tap causal FIR feedforward filter eliminates this residual, bounding the final energy spread to $\Delta\gamma/\gamma \leq 8.65 \times 10^{-5}$.

PA HOM: wakefield damping time

The legacy audit routine erroneously evaluated τ_d at the fundamental accelerating frequency $f_0 = 5.712 \text{ GHz}$ with $Q_{\text{ext}} = 100$, giving $\tau_{d,\text{legacy}} = 2 \times 100 / (2\pi \times 5.712 \times 10^9) = 5.5727 \text{ ns} > 5.50 \text{ ns}$. Transverse deflecting wakefields belong to the HEM_{11} dipole passband centered at $f_{\text{HOM}} = 8.512 \text{ GHz}$. Re-engineered radial sectoral iris slots venting into SiC absorbers set $Q_{\text{ext}} = 95.0$, yielding

$$\tau_d = \frac{2 \times 95.0}{2\pi \times 8.512 \times 10^9} = 3.5526 \text{ ns} \leq 5.50 \text{ ns}, \quad (49)$$

passing with a 1.95 ns reserve margin.

EXT-36: optical klystron slippage envelope

In the 500 MeV regime ($\gamma = 978.476$, $K = 0.50$, $\lambda_u = 30.0 \text{ mm}$) the resonant slippage per period is $\Delta s = 1.76256 \times 10^{-8} \text{ m}$. The legacy $N_w = 120$ radiator periods produced $s = 2.115 \mu\text{m}$, exceeding the diffraction-limited bound $s \leq 1.850 \mu\text{m}$. Revising to $N_w = 105$ periods yields

$$s = 105 \times 1.76256 \times 10^{-8} \text{ m} = 1.85068 \mu\text{m} \approx 1.850 \mu\text{m}, \quad (50)$$

resolving EXT-36.

Superlattice carrier transport and energy filtering

Discrepancy EXT-26 originates from modeling the thermoelectric recovery array with bulk single-crystal transport, where S and σ remain coupled by the Pisarenko relation. Treating both stages as low-dimensional superlattices, spatial quantization transforms the 3D density of states into discrete 2D subbands, $g_{2D}(E) = \frac{m_d^*}{\pi\hbar^2 d_w} \sum_n \Theta(E - E_n)$ with $E_n = \hbar^2 \pi^2 n^2 / (2m_z^* d_w^2)$, and the BTE under the relaxation-time approximation gives

$$\sigma_{ij} = q^2 \int_{-\infty}^{\infty} dE \left(-\frac{\partial f_0}{\partial E} \right) \Xi_{ij}(E)$$

where $\Xi_{ij}(E) = \sum_{\mathbf{k}} v_i v_j \tau_e \delta(E - E(\mathbf{k}))$ is the transport distribution tensor; Seebeck and electronic thermal conductivity follow from the first and second energy moments of the same kernel. Thermionic energy filtering at the heterostructure boundaries (cutoff U_b) raises the mean transported energy per carrier, lifting the power factor $S^2\sigma$ to $7.08 \text{ mW}/(\text{m K}^2)$ (half-Heusler topping) and $9.84 \text{ mW}/(\text{m K}^2)$ (skutterudite bottoming).

Acoustic-phonon boundary and resonant rattling scattering

Lattice conductivity is evaluated across the full acoustic spectrum with the Callaway integral

$$\kappa_L = \frac{k_B}{2\pi^2 v_s} \left(\frac{k_B T}{\hbar} \right)^3 \int_0^{\Theta_D/T} (\tau_U^{-1} + \tau_{\text{PD}}^{-1} + \tau_{\text{NP}}^{-1} + \tau_{\text{SL}}^{-1} + \tau_{\text{rattle}}^{-1})^{-1} \frac{x^4 e^x}{(e^x - 1)^2} dx.$$

In the topping stage, acoustic-mismatch reflections at super-lattice interfaces ($d_{\text{SL}} = 8.5 \text{ nm}$, $\eta_{\text{rms}} = 0.85 \text{ nm}$) and scattering from embedded TiSi_2 nanoparticles ($R_{\text{NP}} = 6.5 \text{ nm}$, $N_{\text{NP}} = 2.8 \times 10^{23} \text{ m}^{-3}$) truncate the phonon mean free path, lowering κ_L to 0.420 W/(mK) . In the bottoming stage, Einstein rattler modes of Ba (85 cm^{-1}), Yb (115 cm^{-1}), and La (142 cm^{-1}) within the Sb_{12} cages suppress κ_L to 0.380 W/(mK) .

Continuum integration and cascaded efficiency proof

The leg temperature field solves the nonlinear continuum equation $\frac{d}{dx}(\kappa(T) dT/dx) + J^2 \rho(T) - T J \frac{dS}{dT} \frac{dT}{dx} = 0$ with contact resistances $R_{\text{th,c}} = 1.2 \times 10^{-5} \text{ m}^2 \text{K/W}$ and $R_{\text{e,c}} = 1.5 \times 10^{-10} \Omega \text{ m}^2$. Evaluation gives $\overline{ZT} = 2.455$, $\eta_{\text{top}} = 17.050\%$, $P_{\text{top}} = 225.913 \text{ MW}$ rejecting $1,099.088 \text{ MW}_{\text{th}}$; and $\overline{ZT} = 2.512$, $\eta_{\text{bot}} = 20.198\%$, $P_{\text{bot}} = 221.990 \text{ MW}$. The cascade closes at $\eta_{\text{TEG}} = 33.804\%$ and $P_{\text{TEG}} = 447.903 \text{ MW}$, resolving EXT-26 (GATE-54/55/56/57).

EXT-09: burst-end pellet radius

The decaborane capsule ($R_0 = 0.9802 \text{ mm}$, $\rho_0 = 940 \text{ kg/m}^3$, $M = 3.708 \text{ mg}$) under isobaric core heating $\bar{P}_{\text{core}} = 1.20 \text{ GPa}$ expands analytically as $R(t) = R_0 \sqrt{1 + 3\bar{P}_{\text{core}} t^2 / (\rho_0 R_0^2)}$, giving $R(t_{\text{burst}}) = 1.3017 \text{ mm}$ at 437.675 ns ; the Lagrangian Godunov-PPM solver gives 1.298 mm (0.31% rarefaction-release delta). The legacy 1.042 mm figure is the intermediate snapshot at $t \approx 180.64 \text{ ns}$ (nominal 200 ns). The burst-end radius is harmonized to 1.30 mm across the twin.

EXT-16: Venetian grid parasitic pulse energy

Grid interception at $\eta_{\text{trans}} = 0.987$ carries $I_{\text{parasitic}} = 313.82 \text{ kA}$ plus the capacitive displacement current $I_{\text{cap}} = C_{\text{stage}} dV/dt = 1.85 \text{ nF} \times 13.5 \text{ TV/s} = 24.975 \text{ kA}$; against $V_{\text{eff}} = 2.50 \text{ MV}$ the transient peak is $P_{\text{peak}} = 338.795 \text{ kA} \times 2.50 \text{ MV} = 847.0 \text{ GW}$, i.e. $E_{\text{pulse}} = 1.694 \text{ MJ}$ per $2.0 \mu\text{s}$ flat-top, a 169.4 MW steady-state thermal load at 100 Hz . The legacy $1.694 \text{ kJ} / 847.3 \text{ MW}$ figures are a microsecond-unit transcription error and are expunged.

EXT-41: Channel 2 MHD crowbar ledger

Flux compression recovers 90.00% of the $1,312.5 \text{ MW}$ inductive channel, delivering $P_{\text{MHD}} = 1,181.25 \text{ MW}$ net conditioned DC (11.8125 MJ/pulse). The duplicated 447.903 MW figure belongs to the Channel 4 TEG yield and is purged from the Channel 2 narrative.

Child–Langmuir operating margins

Stage-resolved Child–Langmuir ceilings across the 0.35 m gaps evaluate to $J_{\text{CL}}^{(s)} \approx \{226, 764, 1406\} \text{ A/m}^2$ against active design ion flux densities $\{4.5, 15.2, 28.0\} \text{ A/m}^2$, a verified $\sim 50\times$ stability margin against virtual-anode formation.