




this paper



reused (SimuQ solver; scheduler design)



artifact / input

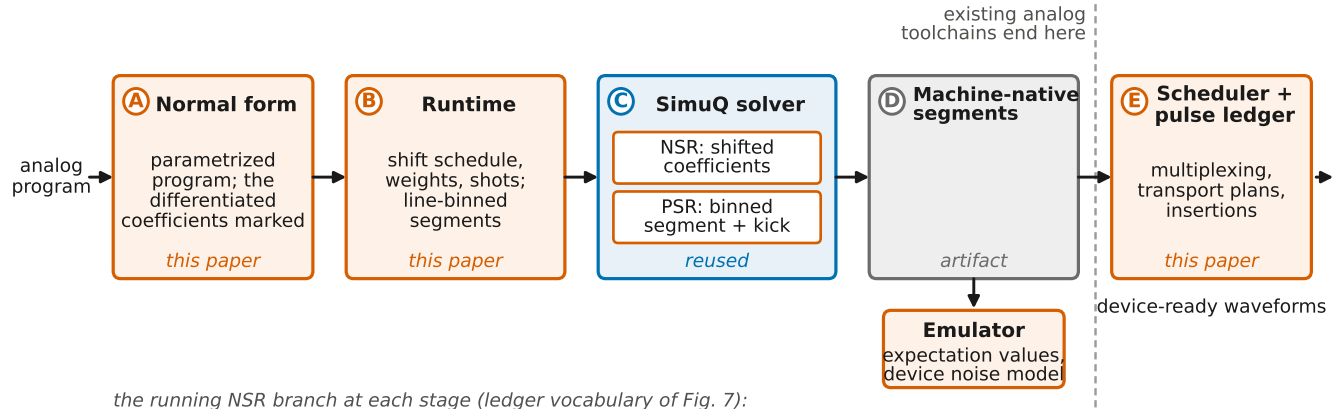

the running NSR branch at each stage (ledger vocabulary of Fig. 7):

ev[0,T): $c \cdot Z_a Z_b$
 $c \cdot X_a \ c \cdot X_b$ (src)
 differentiate x

branch ($\kappa=0, \sigma=+$):
 ev[0,T) at $x+s$
 weight $+\bar{\Omega}$

$\lambda = c(x+s)/c(x)$:
 geometry frozen,
 amplitudes $\times \lambda$

seg0 [0,T):
 $\Omega \cdot X_a \ \Omega \cdot X_b \ \theta_j \cdot Z_a Z_b$
 (src $\times \lambda$); ins -

seg0: drive I/Q ✓
 dressing ✓
 move -, gate -