( ) Preliminary Specification
(V) Final Specification

Module	**21.5” Color TFT-LCD**
Model Name	**M215HTN01.1**

Customer	**Date**	**Approved by**	**Date**
		Howard Lee	Sep 27, 2012
Approved by		**Prepared by**	**Date**
		Louis Jung	Sep 27, 2012
Note: This Specification is subject to change without notice.		AU Optronics corporation	

AUO Confidential for STAR Internal Use Only / 2012/11/5

Contents

1 Handling Precautions 5
2 General Description 6
2.1 Display Characteristics 6
2.2 Optical Characteristics 7
2.3 Mechanical Characteristics 11
3 Functional Block Diagram 12
4 Absolute Maximum Ratings 13
4.1 TFT LCD Module 13
4.2 Backlight Unit 13
4.3 Absolute Ratings of Environment 13
5 Electrical characteristics 15
5.1 TFT LCD Module 15
5.1.1 Power Specification 15
5.1.2 Signal Electrical Characteristics 16
6.0 Signal Characteristic 19
6.1 Pixel Format Definition 19
6.2 Input Data Format Definition 19
6.3 Signal Description 20
6.4 Timing Characteristics 22
6.5 Timing diagram 23
6.6 Power ON/OFF Sequence 24
7 Connector & Pin Assignment 25
7.1 TFT LCD Module 25
7.1.1 Pin Assignment 25
7.2 LED Connector on Backlight Unit 26
7.2.1 LED Pin assignment 26
7.2.2 LED Connector dimension 27
7.2.3 LED Mating housing dimension 27
8 Reliability Test 28
9 Shipping Label 29
10 Mechanical Characteristics 30
11. Packing Specification 31
11.1 Packing Flow 31
11. 2 Pallet and shipment information 32

AUO Confidential For STAR Internal Use Only / 2012/11/5

Record of Revision

Version and Date	Page	Old description	New Description	Remark
0.1 2012/06/26	All	First Edition for Customer	-	
	13	4.2 Backlight Unit LED forward Voltage variation (per string variation) △Vf=3.6	4.2 Backlight Unit LED forward Voltage variation (per string variation) △Vf=2.4	Revised
	21	Signal description 	Signal description 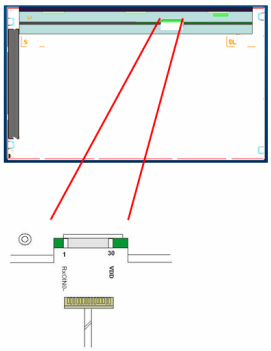	Revised
	24	6.6 Power ON/OFF Sequence VDD power and lamp on/off sequence are as follows.	6.6 Power ON/OFF Sequence VDD power and backlight on/off sequence are as follows.	Revised
	30	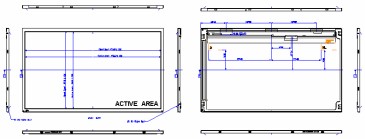	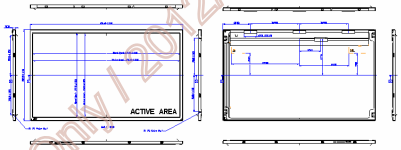	Revised
	28	NA	7.2.3 LED Mating housing dimension 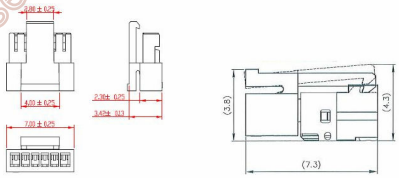	Added
	6	Power Consumption =15.534 Power Consumption (VDD line + LED line) [Watt] 15.534W (Typ) VDD line : PDD (typ), All black pattern at 60Hz = 5.65W LED line : PBLU (typ) =9.884 W	Power Consumption =15.634 Power Consumption (VDD line + LED line) [Watt] 15.634W (Typ) VDD line : PDD (typ), All black pattern at 60Hz = 5.65W LED line : PBLU (typ) =9.984 W	Modified
	13	4.1 TFT Module Logic/LCD Drive Voltage min = 0	4.1 TFT Module Logic/LCD Drive Voltage min = -0.3V	Revised
	15	5.1.1 Power Specification Symbol / Parameter / Min / Typ / Max / Unit / Conditions VDD / Logic/LCD Drive Voltage / 4.5 / 5.0 / 5.5 / [Volt] / +/-10% IDD / Input Current / - / 1.11 / 1.33 / [A] / VDD= 5.0V, All Black Pattern At 60Hz - / 1.32 / 1.58 / [A] / VDD= 5.0V, All Black Pattern At 75Hz PDD / VDD Power / - / 5.55 / 6.65 / [Watt] / VDD= 5.0V, All Black Pattern At 60Hz - / 6.6 / 7.9 / [Watt] / VDD= 5.0V, All Black Pattern At 75Hz	5.1.1 Power Specification Symbol / Parameter / Min / Typ / Max / Unit / Conditions VDD / Logic/LCD Drive Voltage / 4.5 / 5.0 / 5.5 / [Volt] / +/-10% IDD / Input Current / - / 1.13 / 1.36 / [A] / VDD= 5.0V, All Black Pattern At 60Hz - / 1.34 / 1.61 / [A] / VDD= 5.0V, All Black Pattern At 75Hz PDD / VDD Power / - / 5.65 / 6.80 / [Watt] / VDD= 5.0V, All Black Pattern At 60Hz - / 6.7 / 8.05 / [Watt] / VDD= 5.0V, All Black Pattern At 75Hz	Revised
	16	5.2 Backlight unit Symbol / Description / Min. / Typ. / Max. / Unit / Note IRLED1 / IRLED2 / IRLED3 / IRLED4 / LED Operation Current / - / 65 / 68 / [mA] / Note 1 VLED / Light Bar Operation Voltage / 36 / 38.4 / 40.8 / [Volt] / Note 2 PBLU / BLU Power Consumption / - / 9.984 / 11.1 / [Watt] / Note 3 LTLED / LED Life Time (Typical) / 30,000 / - / - / [Hour] / Note 4	5.2 Backlight unit Symbol / Description / Min. / Typ. / Max. / Unit / Note IRLED1 / IRLED2 / IRLED3 / IRLED4 / LED Operation Current / - / 65 / 68 / [mA] / Note 1 VLED / Light Bar Operation Voltage / 36 / 38.4 / 43.2 / [Volt] / Note 2 PBLU / BLU Power Consumption / - / 9.984 / 11.75 / [Watt] / Note 3 LTLED / LED Life Time (Typical) / 30,000 / - / - / [Hour] / Note 4	Revised
	22	6.4 Timing Characteristics	6.4 Timing Characteristics	Revised

AUO Confidential For SZR Internal Use Only / 2012/1/9

<table>
<tr>
<td></td>
<td></td>
<td>
<table>
<tr><th>Signal</th><th>Item</th><th>Symbol</th><th>Min</th><th>Typ</th><th>Max</th><th>Unit</th></tr>
<tr><td rowspan="3">Vertical Section</td><td>Period</td><td>Tv</td><td>1105</td><td>1130</td><td>1818</td><td>Th</td></tr>
<tr><td>Active</td><td>Tdisp(v)</td><td>1080</td><td>1080</td><td>1080</td><td>Th</td></tr>
<tr><td>Blanking</td><td>Tbp(v)+Tfp(v)+PWvs</td><td>25</td><td>50</td><td>738</td><td>Th</td></tr>
<tr><td rowspan="3">Horizontal Section</td><td>Period</td><td>Th</td><td>1034</td><td>1050</td><td>1100</td><td>Tclk</td></tr>
<tr><td>Active</td><td>Tdisp(h)</td><td>960</td><td>960</td><td>960</td><td>Tclk</td></tr>
<tr><td>Blanking</td><td>Tbp(h)+Tfp(h)+PWhs</td><td>74</td><td>90</td><td>140</td><td>Tclk</td></tr>
<tr><td rowspan="2">Clock</td><td>Period</td><td>Tclk</td><td>10.6</td><td>14</td><td>17.5</td><td>ns</td></tr>
<tr><td>Frequency</td><td>Freq</td><td>57.1</td><td>71.2</td><td>94</td><td>MHz</td></tr>
<tr><td>Frame rate</td><td>Frame rate</td><td>F</td><td>50</td><td>60</td><td>76</td><td>Hz</td></tr>
</table>
</td>
<td>
<table>
<tr><th>Signal</th><th>Item</th><th>Symbol</th><th>Min</th><th>Typ</th><th>Max</th><th>Unit</th></tr>
<tr><td rowspan="3">Vertical Section</td><td>Period</td><td>Tv</td><td>1092</td><td>1130</td><td>1818</td><td>Th</td></tr>
<tr><td>Active</td><td>Tdisp(v)</td><td>1080</td><td>1080</td><td>1080</td><td>Th</td></tr>
<tr><td>Blanking</td><td>Tbp(v)+Tfp(v)+PWvs</td><td>12</td><td>50</td><td>738</td><td>Th</td></tr>
<tr><td rowspan="3">Horizontal Section</td><td>Period</td><td>Th</td><td>1034</td><td>1050</td><td>1100</td><td>Tclk</td></tr>
<tr><td>Active</td><td>Tdisp(h)</td><td>960</td><td>960</td><td>960</td><td>Tclk</td></tr>
<tr><td>Blanking</td><td>Tbp(h)+Tfp(h)+PWhs</td><td>74</td><td>90</td><td>140</td><td>Tclk</td></tr>
<tr><td rowspan="2">Clock</td><td>Period</td><td>Tclk</td><td>10.6</td><td>14</td><td>17.7</td><td>ns</td></tr>
<tr><td>Frequency</td><td>Freq</td><td>56.5</td><td>71.2</td><td>94</td><td>MHz</td></tr>
<tr><td>Frame rate</td><td>Frame rate</td><td>F</td><td>50</td><td>60</td><td>76</td><td>Hz</td></tr>
<tr><td>Hsync Frequency</td><td>Hsync Frequency</td><td>HFreq</td><td>55</td><td>68</td><td>91</td><td>KHz</td></tr>
</table>
</td>
<td></td>
</tr>
<tr>
<td></td>
<td>12</td>
<td>3. Functonal Block Diagram
 
</td>
<td>3. Functonal Block Diagram
 
</td>
<td>Revised</td>
</tr>
<tr>
<td>1.0 2012/9/27</td>
<td></td>
<td>Fina Iversion 1.0</td>
<td></td>
<td></td>
</tr>
<tr>
<td>1.1 2012/10/12</td>
<td>24</td>
<td>
<table>
<tr><th rowspan="2">Parameter</th><th colspan="3">Value</th><th rowspan="2">Unit</th></tr>
<tr><th>Min.</th><th>Typ.</th><th>Max.</th></tr>
<tr><td>T1</td><td>0.5</td><td>--</td><td>10</td><td>[ms]</td></tr>
<tr><td>T2</td><td>0</td><td>--</td><td>50</td><td>[ms]</td></tr>
<tr><td>T3</td><td>500</td><td>--</td><td>--</td><td>[ms]</td></tr>
<tr><td>T4</td><td>100</td><td>--</td><td>--</td><td>[ms]</td></tr>
<tr><td>T5</td><td>0</td><td></td><td>50</td><td>[ms]
Note1,2</td></tr>
<tr><td>T6</td><td>5</td><td>--</td><td>100</td><td>[ms]
Note1,2</td></tr>
<tr><td>T7</td><td>1000</td><td>--</td><td>--</td><td>[ms]</td></tr>
</table>
T6的min. 值爲 ”5”</td>
<td>
<table>
<tr><th rowspan="2">Parameter</th><th colspan="3">Value</th><th rowspan="2">Unit</th></tr>
<tr><th>Min.</th><th>Typ.</th><th>Max.</th></tr>
<tr><td>T1</td><td>0.5</td><td>--</td><td>10</td><td>[ms]</td></tr>
<tr><td>T2</td><td>0</td><td>--</td><td>50</td><td>[ms]</td></tr>
<tr><td>T3</td><td>500</td><td>--</td><td>--</td><td>[ms]</td></tr>
<tr><td>T4</td><td>100</td><td>--</td><td>--</td><td>[ms]</td></tr>
<tr><td>T5</td><td>0</td><td></td><td>50</td><td>[ms]
Note1,2</td></tr>
<tr><td>T6</td><td>0</td><td>--</td><td>100</td><td>[ms]
Note1,2</td></tr>
<tr><td>T7</td><td>1000</td><td>--</td><td>--</td><td>[ms]</td></tr>
</table>
T6的min. 值爲 ”0”</td>
<td>Revised</td>
</tr>
</table>

AUO Confidential For STAR Internal Use Only / 2012/11/5

1 Handling Precautions

1) Since front polarizer is easily damaged, pay attention not to scratch it.
2) Be sure to turn off power supply when inserting or disconnecting from input connector.
3) Wipe off water drop immediately. Long contact with water may cause discoloration or spots.
4) When the panel surface is soiled, wipe it with absorbent cotton or other soft cloth.
5) Since the panel is made of glass, it may break or crack if dropped or bumped on hard surface.
6) Since CMOS LSI is used in this module, take care of static electricity and insure human earth when handling.
7) Do not open or modify the Module Assembly.
8) Do not press the reflector sheet at the back of the module to any directions.
9) In case if a Module has to be put back into the packing container slot after once it was taken out from the container, do not press the center of the LED lightbar edge. Instead, press at the far ends of the LED light bar edge softly. Otherwise the TFT Module may be damaged.
10) At the insertion or removal of the Signal Interface Connector, be sure not to rotate nor tilt the Interface Connector of the TFT Module.
11) After installation of the TFT Module into an enclosure, do not twist nor bend the TFT Module even momentary. At designing the enclosure, it should be taken into consideration that no bending/twisting forces are applied to the TFT Module from outside. Otherwise the TFT Module may be damaged.
12) Small amount of materials having no flammability grade is used in the LCD module. The LCD module should be supplied by power complied with requirements of Limited Power Source (IEC60950 or UL1950), or be applied exemption.
13) Pls avoid touching COF position while you are doing mechanical design.
14) When storing modules as spares for a long time, the following precaution is necessary:
Store them in a dark place. Do not expose the module to sunlight or fluorescent light. Keep the temperature between 5℃ and 35℃ at normal humidity.

AUO Confidential For STAR Internal Use Only / 2012/11/5

2 General Description

This specification applies to the 21.5 inch-wide Color a-Si TFT-LCD Module M215HTN01.1The display supports the Full HD - 1920(H) x 1080(V) screen format and 16.7M colors (RGB 6-bits + Hi-FRC data). All input signals are 2-channel LVDS interface and this module doesn't contain an driver board for backlight.

2.1 Display Characteristics

The following items are characteristics summary on the table under 25□ condition:

ITEMS	Unit	SPECIFICATIONS
Screen Diagonal	[mm]	546.86(21.53")
Active Area	[mm]	476.64 (H) x 268.11 (V)
Pixels H x V		1920(x3) x 1080
Pixel Pitch	[um]	248.25 (per one triad) ×248.25
Pixel Arrangement		R.G.B. Vertical Stripe
Display Mode		TN Mode, Normally White
White Luminance (Center)	[cd/m^2]	250cd/m^2 (Typ.)
Contrast Ratio		1000 (Typ.)
Optical Response Time	[msec]	5ms (Typ., on/off)
Nominal Input Voltage VDD	[Volt]	+5.0 V
Power Consumption (VDD line + LED line)	[Watt]	15.634W (Typ) VDD line : PDD (typ), All black pattern at 60Hz = 5.65W LED line : PBLU (typ) =9.984 W
Weight	[Grams]	1750
Physical Size	[mm]	495.6(W) × 292.2(H) × 10.3(D) Typ.
Electrical Interface		Dual channel LVDS
Support Color		16.7M colors (RGB 6-bit + Hi_FRC)
Surface Treatment		Anti-Glare, 3H
Temperature Range Operating Storage (Shipping)	 [°C] [°C]	 0 to +50 -20 to +60
RoHS Compliance		RoHS Compliance
TCO Compliance		TCO 6.0 Compliance

AUO Confidential For STAR Internal Use Only / 20121115

2.2 Optical Characteristics

The optical characteristics are measured under stable conditions at 25□:

Item	Unit	Conditions	Min.	Typ.	Max.	Note
Viewing Angle	[degree]	Horizontal (Right) CR = 10 (Left)	75 75	85 85	- -	*2*
		Vertical (Up) CR = 10 (Down)	70 70	80 80	- -	
Contrast ratio		Normal Direction	600	1000	-	*3*
Response Time	[msec]	Raising Time (T_{rR})	-	3.8	5.5	*4*
		Falling Time (T_{rF})	-	1.2	2.5	
		Raising + Falling	-	5	8	
Color / Chromaticity Coordinates (CIE)		Red x	0.615	0.645	0.675	*5*
		Red y	0.302	0.332	0.362	
		Green x	0.287	0.317	0.347	
		Green y	0.601	0.631	0.661	
		Blue x	0.127	0.157	0.187	
		Blue y	0.030	0.060	0.090	
Color Coordinates (CIE) White		White x	0.283	0.313	0.343	
		White y	0.299	0.329	0.359	
Central Luminance	[cd/m^2]		200	250	-	*6*
Luminance Uniformity	[%]		75	80	-	*7*
Crosstalk (in 60Hz)	[%]				1.5	*8*
Flicker	dB				-20	*9*

AUO Confidential For STAR Internal Use Only / 2012/1/6

Note 1: **Measurement method**

The LCD module should be stabilized at given temperature for 30 minutes to avoid abrupt temperature change during measuring (at surface 35□). In order to stabilize the luminance, the measurement should be executed after lighting Backlight for 30 minutes in a stable, windless and dark room.

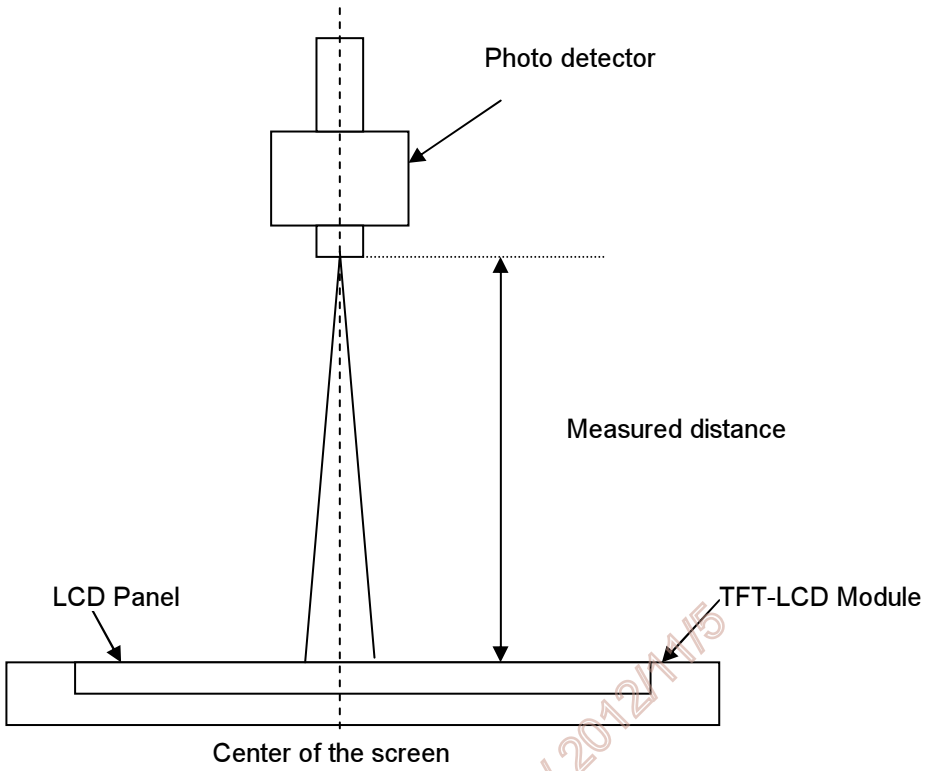

AUO Confidential For STA Internal Use Only / 2012/11/5

Note 2: **Definition of viewing angle** measured by ELDIM (EZContrast 88)

Viewing angle is the measurement of contrast ratio ≧10, at the screen center, over a 180° horizontal and 180° vertical range (off-normal viewing angles). The 180° viewing angle range is broken down as follows; 90° (θ) horizontal left and right and 90° (Φ) vertical, high (up) and low (down). The measurement direction is typically perpendicular to the display surface with the screen rotated about its center to develop the desired measurement viewing angle.

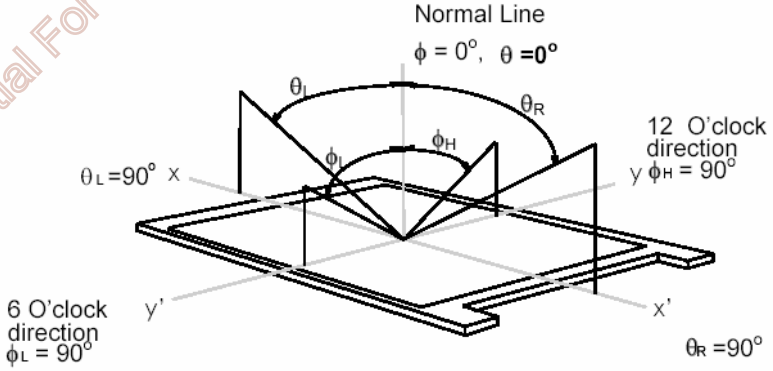

Note 3: **Contrast ratio is** measured by TOPCON SR-3

Note 4: **Definition of Response time** measured by Westar TRD-100A

The output signals of photo detector are measured when the input signals are changed from "Full Black" to "Full White" (rising time, T_{rR}), and from "Full White" to "Full Black" (falling time, T_{rF}), respectively. The response time is interval between the 10% and 90% (1 frame at 60 Hz) of amplitudes.

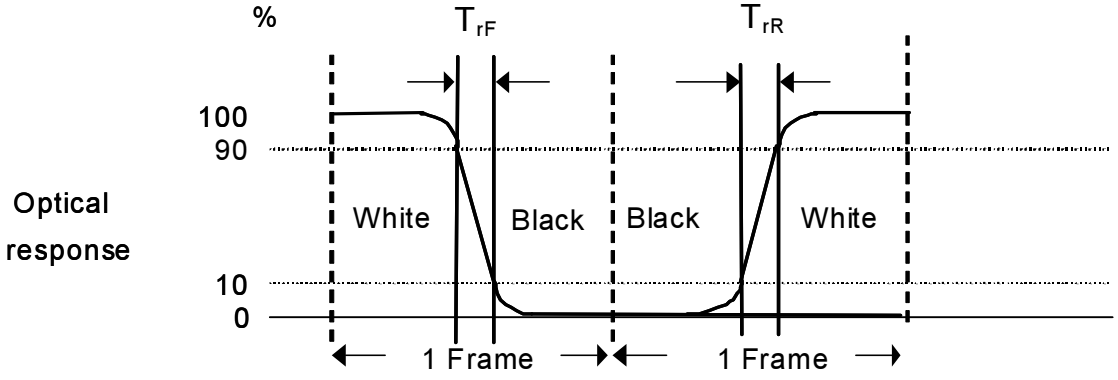

$T_{rR} + T_{rF}$ = 5 msec (typ.).

Note 5: **Color chromaticity and coordinates (CIE) is** measured by TOPCON SR-3

Note 6**: Central luminance is** measured by TOPCON SR-3

Note 7: **Luminance uniformity of these 9 points is defined as below and** measured by TOPCON SR-3

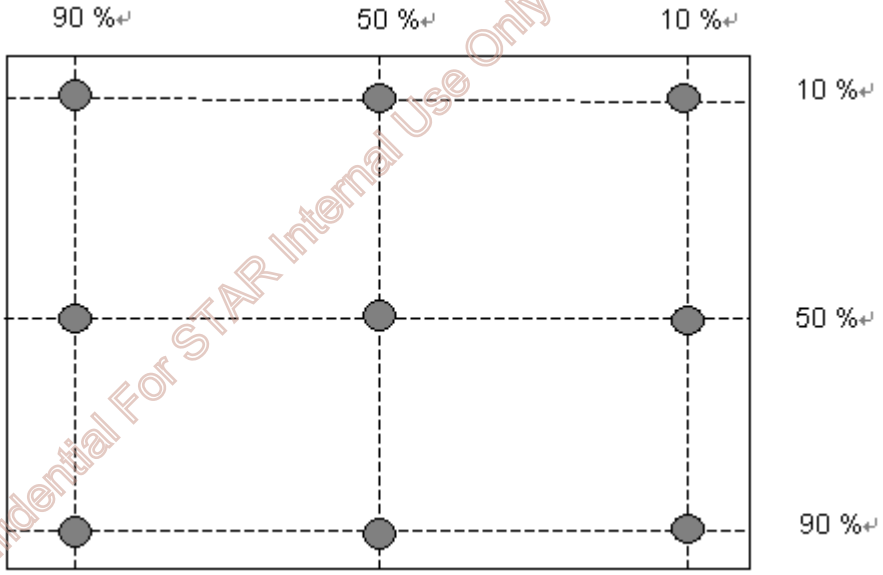

AUO Confidential For STAR Internal Use Only / 2012/11/5

$$\text{Uniformity} = \frac{\text{Minimum Luminance in 9 points (1 - 9)}}{\text{Maximum Luminance in 9 Points (1 - 9)}}$$

Note 8: **Crosstalk is defined as below and** measured by TOPCON SR-3

CT = | YB – YA | / YA × 100 (%)

Where

YA = Luminance of measured location without gray level 0 pattern (cd/m2)

YB = Luminance of measured location with gray level 0 pattern (cd/m2)

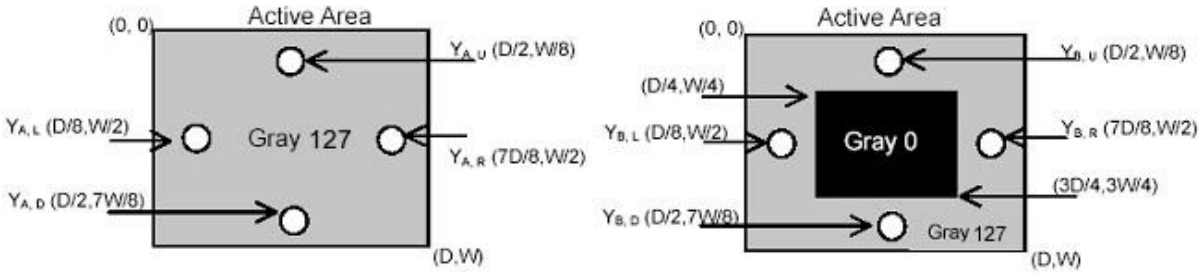

Note 9: **Test Patern: Subchecker Pattern** measured by TOPCON SR-3

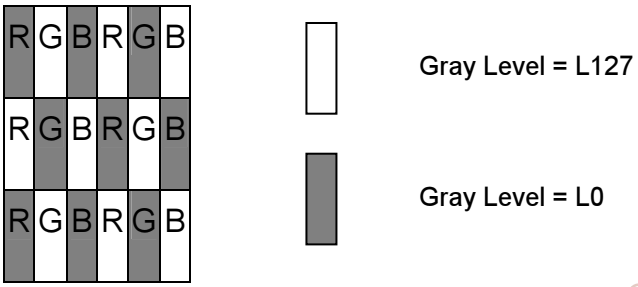

Method: Record dBV & DC value with TRD-100

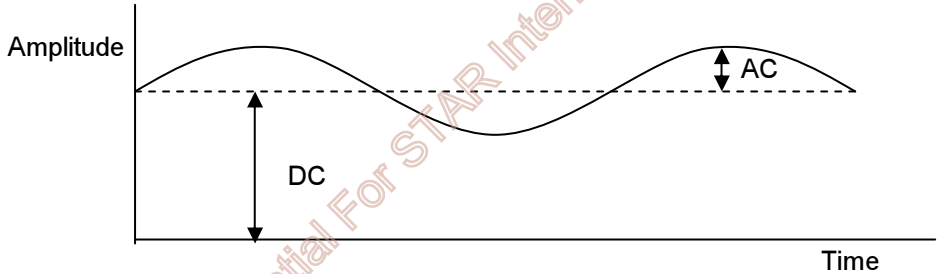

$$\text{Flicker (dB)} = 20\log\frac{\text{AC Level(at 30 Hz)}}{\text{DC Level}}$$

AUO Confidential For STAR Internal Use Only / 2012/11/5

2.3 Mechanical Characteristics

Item	Unit	Min.	Note
Compression Endurance	[Kgf]	2.5	1

Note 1: Test Method

The point is at a distance from right-downside 25mm x 25mm defined as the Start Point of Measure Points, and the point is at a distance 25mm from left-side & around 10mm from PCB defined as the End Point.

Align 50mm x 50mm block from Start Point on the Bezel Back, and the corners of each block are Measure Points.

If the distance from the last block to each side of the End Point ≧ 25mm, add other blocks to make sure that most area of Bezel Back can be measured.

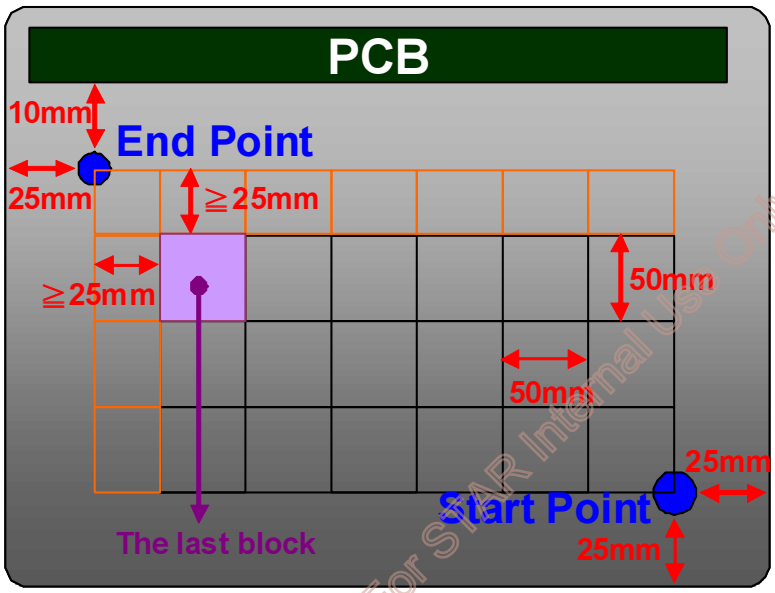

AUO Confidential For STAR Internal Use Only / 2012/11/5

3 Functional Block Diagram

The following diagram shows the functional block of the 21.5 inch Color TFT-LCD Module:

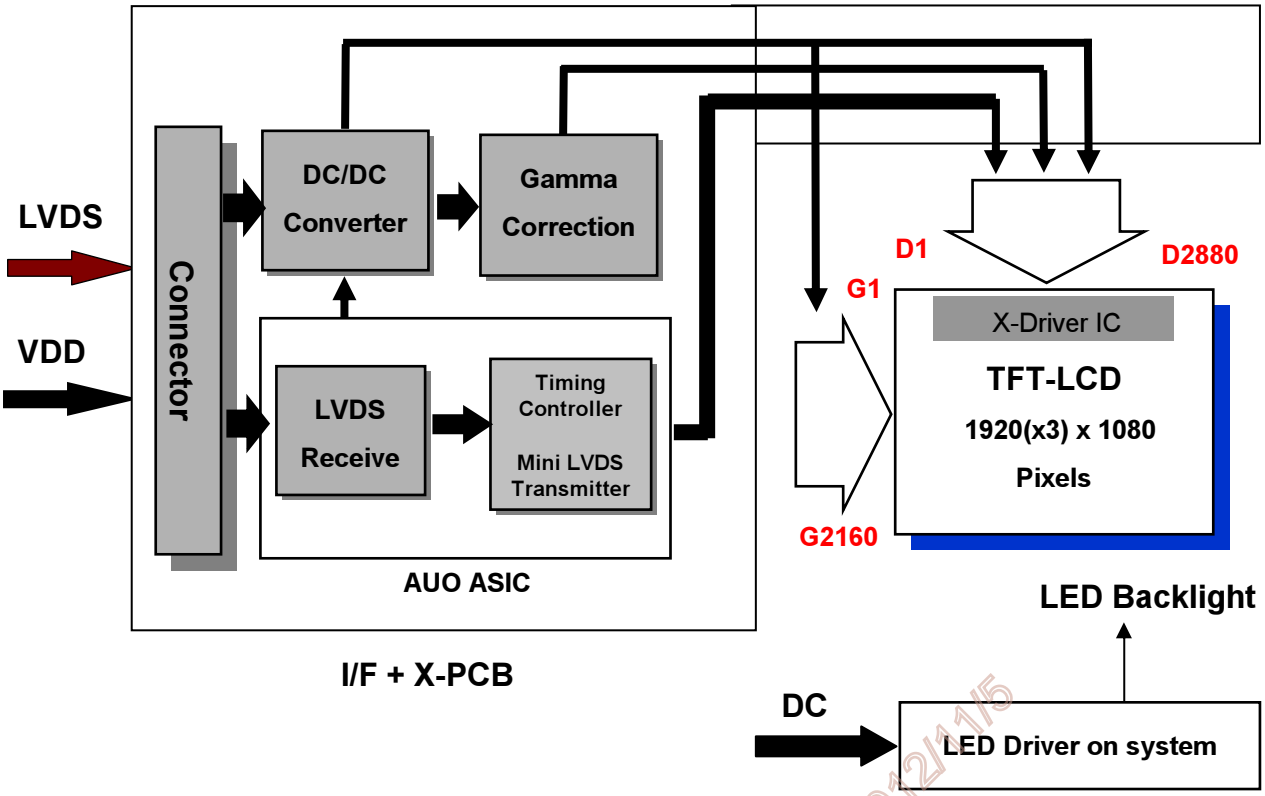

AUO Confidential For STAR Internal Use Only / 2012/11/5

4 Absolute Maximum Ratings

Absolute maximum ratings of the module are as following:

4.1 TFT LCD Module

Item	Symbol	Min	Max	Unit	Conditions
Logic/LCD Drive Voltage	VDD	-0.3	6.0	[Volt]	***Note 1,2***

4.2 Backlight Unit

Item	Symbol	Min	Max	Unit	Conditions
LED Forward Current	IRLED1	0	90	[mA]	***Note 1,2,5*** **100% duty**
	IRLED2				
	IRLED3				
	IRLED4				
LED Pulse Forward Current	IPLED1	-	150	[mA]	***Note 1,2,5*** **10% duty @100Hz**
	IPLED2				
	IPLED3				
	IPLED4				
LED forward Voltage variation (per string variation)	ΔVf	-	2.4	[Volt]	***Note 1,2***

4.3 Absolute Ratings of Environment

Item	Symbol	Min.	Max.	Unit	Conditions
Operating Temperature	TOP	0	+50	[°C]	***Note 3***
Glass surface temperature (operation)	TGS	0	+65	[°C]	***Note 3, Note 4***
Operation Humidity	HOP	5	90	[%RH]	***Note 3***
Storage Temperature	TST	-20	+60	[°C]	
Storage Humidity	HST	5	90	[%RH]	

Note 1: With in Ta (25℃)
Note 2: Permanent damage to the device may occur if exceeding maximum values
Note 3: Temperature and relative humidity range are shown as the below figure.

1. 90% RH Max (Ta ≦39℃)
2. Max wet-bulb temperature at 39℃ or less. (Ta ≦39℃)
3. No condensation

Note 4: *Function Judged only*
Note 5: IRLED1,2,3,4 and IPLED1,2,3,4 define as per strings LED current.

AUO Confidential For STAR Internal Use Only 2012/11/5

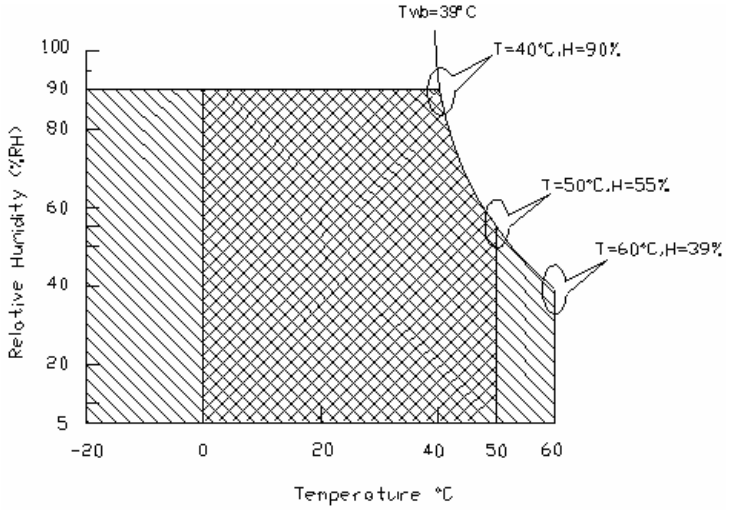

Operating Range Storage Range 

AUO Confidential For STAR Internal Use Only / 2012/11/5

5 Electrical characteristics

5.1 TFT LCD Module

5.1.1 Power Specification

Input power specifications are as following:

Symbol	Parameter	Min	Typ	Max	Unit	Conditions
VDD	Logic/LCD Drive Voltage	4.5	5.0	5.5	[Volt]	+/-10%
IDD	Input Current	-	1.13	1.36	[A]	VDD= 5.0V, All Black Pattern At 60Hz
			1.34	1.61	[A]	VDD= 5.0V, All Black Pattern At 75Hz
PDD	VDD Power	-	5.65	6.80	[Watt]	VDD= 5.0V, All Black Pattern At 60Hz
			6.7	8.05	[Watt]	VDD= 5.0V, All Black Pattern At 75Hz
IRush	Inrush Current	-	-	3	[A]	**Note 1**
VDDrp	Allowable Logic/LCD Drive Ripple Voltage	-	-	500	[mV] p-p	VDD= 5.0V, All Black Pattern At 75Hz

Note 1: Measurement conditions:

The duration of rising time of power input is 470us.

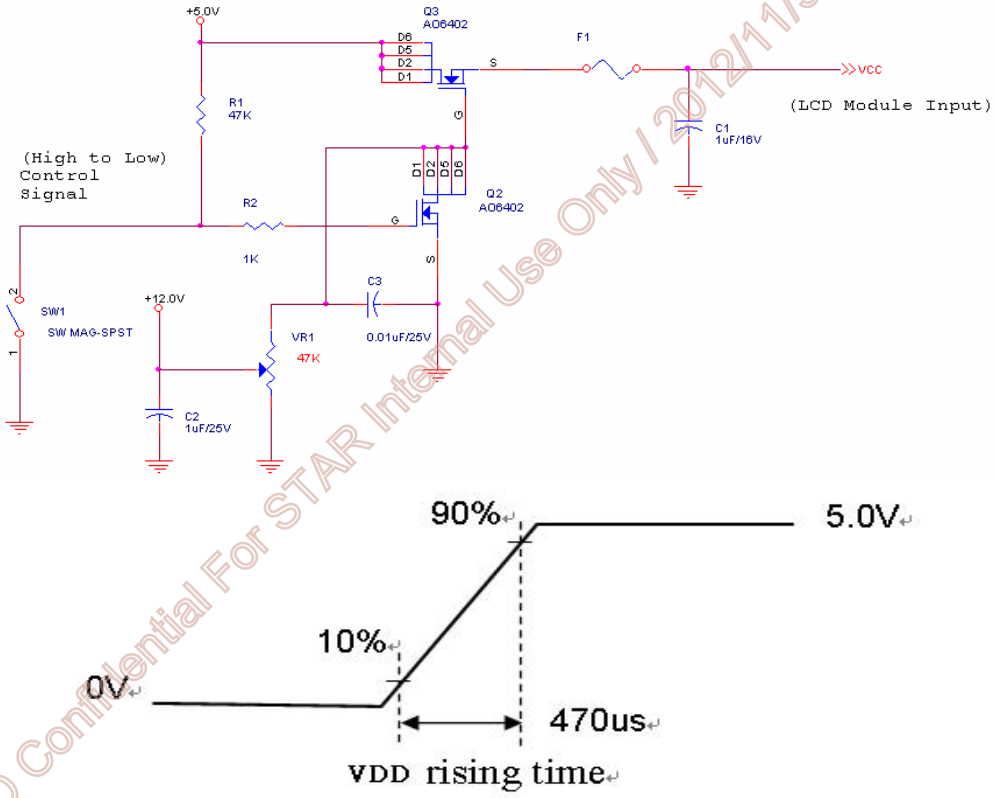

AUO Confidential For STAR Internal Use Only / 2012/11/5

5.1.2 Signal Electrical Characteristics

1. DC Characteristics of each signal are as following:

Symbol	Parameter	Min	Typ	Max	Units	Condition
VTH	Differential Input High Threshold	-	-	+100	[mV]	VICM = 1.2V ***Note 1***
VTL	Differential Input Low Threshold	-100	-	-	[mV]	VICM = 1.2V ***Note 1***
| VID |	Input Differential Voltage	100	-	600	[mV]	***Note 1***
VICM	Differential Input Common Mode Voltage	+1.0	+1.2	+1.5	[V]	VTH-VTL = 200MV (max) ***Note 1***

Note 1: LVDS Signal Waveform

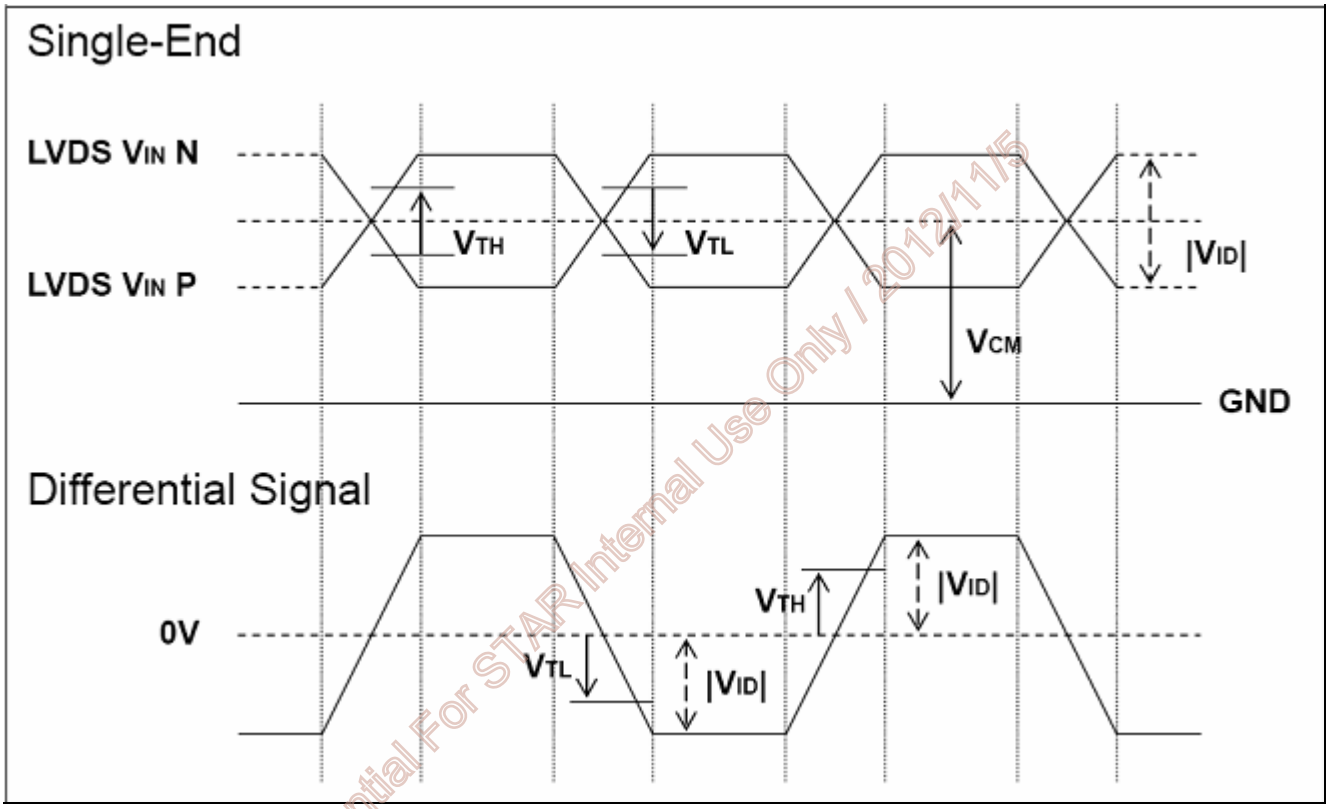

AUO Confidential For STAR Internal Use Only / 2012/11/5

2. AC Characteristics

Description	Symbol	Min	Max	Unit	Note
Maximum deviation of input clock frequency during SSC	F_{DEV}	-	± 3	%	
Maximum modulation frequency of input clock during SSC	F_{MOD}	-	200	KHz	

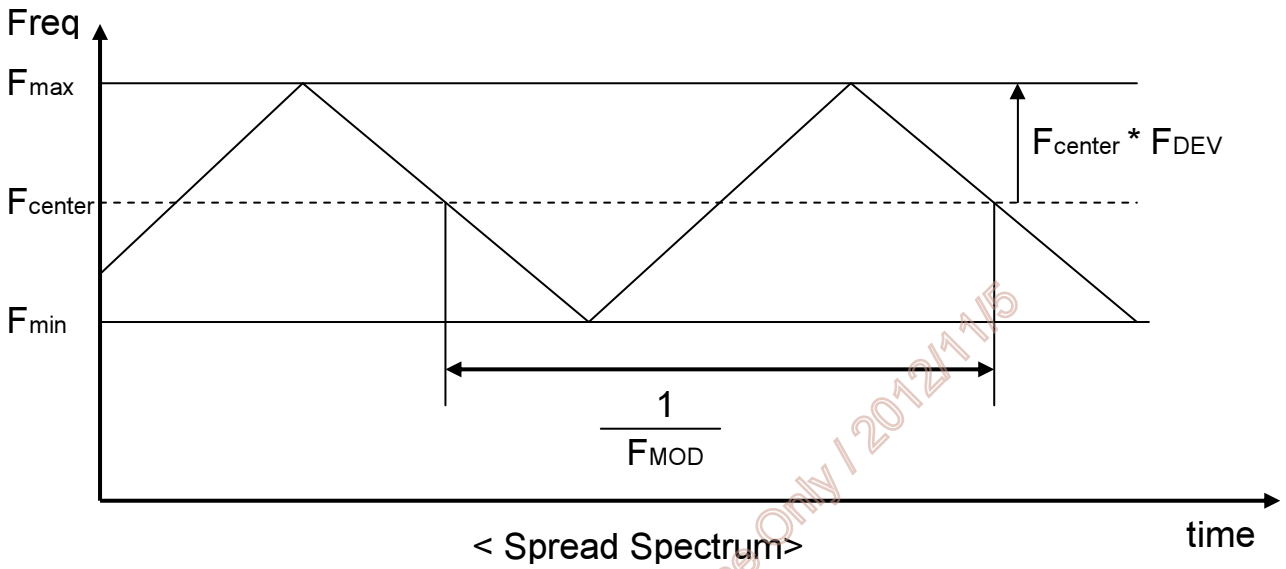

AUO Confidential For STAR Internal Use Only / 2012/11/5

5.2 Backlight Unit

Parameter guideline for LED driver is under stable conditions at 25□(Room Temperature):

Symbol	Description	Min.□	Typ.	Max.	Unit	Note
IRLED1 IRLED2 IRLED3 IRLED4	LED Forward Current	-	65	68	[mA]	***Note 1***
VLED	Light Bar Operation Voltage	36	38.4	43.2	[Volt]	***Note 2***
PBLU	BLU Power Consumption	-	9.984	11.75	[Watt]	***Note 3***
LTLED	LED Life Time (Typical)	30,000	-	-	[Hour]	***Note 4***

Each module consists of 48 pcs LED (4 strings x 12 pcs / string)

Note 1: The specified current is 100% duty of LED chip input current, IRLED1,2,3,4 define as per strings LED current.

Note 2: The value showed is one string operation voltage.

Note 3: PBLU = VLED *(IRLED1+IRLED2+IRLED3+IRLED4)

Note 4: Definition of life time: Brightness becomes to 50% of its original value. The minimum life time of LED unit is on the condition of IRLED = 65mA and 25±2°C (Room Temperature).

AUO Confidential For STAR Internal Use Only / 2012/11/5

6.0 Signal Characteristic

6.1 Pixel Format Definition

Following figure shows the relationship of the input signals and LCD pixel format.

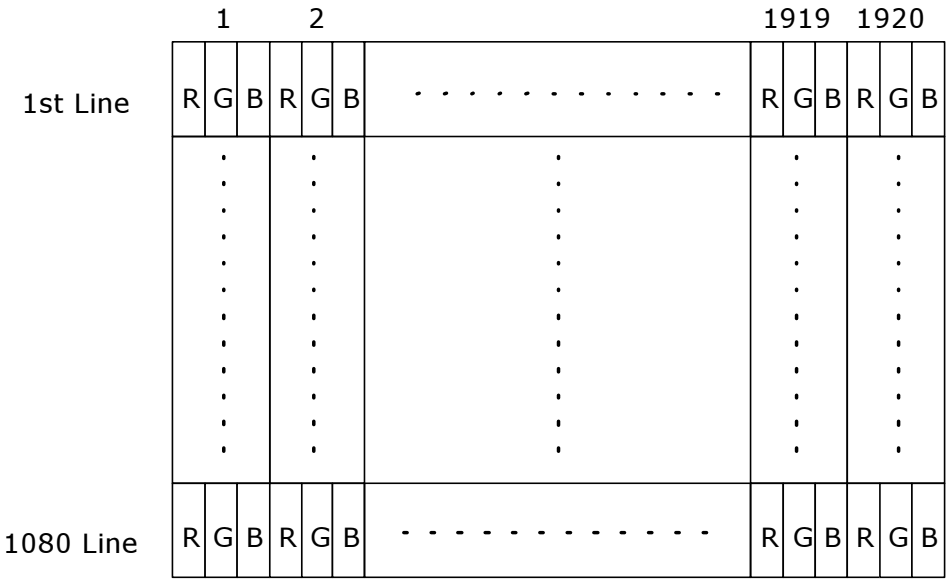

6.2 Input Data Format Definition

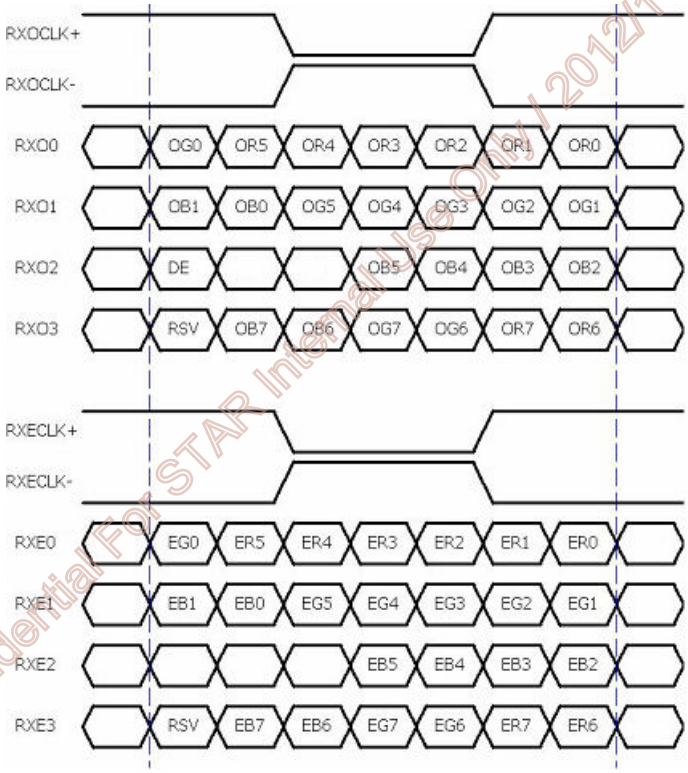

AUO Confidential For STAR Internal Use Only / 2012/11/5

Note 1: R/G/B data 7:MSB, R/G/B data 0:LSB O = "Odd Pixel Data" E = "Even Pixel Data"

6.3 Signal Description

PIN #	SIGNAL NAME	DESCRIPTION
1	RxO0-	Negative LVDS differential data input (Odd data)
2	RxO0+	Positive LVDS differential data input (Odd data)
3	RxO1-	Negative LVDS differential data input (Odd data)
4	RxO1+	Positive LVDS differential data input (Odd data)
5	RxO2-	Negative LVDS differential data input (Odd data)
6	RxO2+	Positive LVDS differential data input (Odd data)
7	GND	Power Ground
8	RxOCLK-	Negative LVDS differential clock input (Odd clock)
9	RxOCLK+	Positive LVDS differential clock input (Odd clock)
10	RxO3-	Negative LVDS differential data input (Odd data)
11	RxO3+	Positive LVDS differential data input (Odd data)
12	RxE0-	Negative LVDS differential data input (Even data)
13	RxE0+	Positive LVDS differential data input (Even data)
14	GND	Power Ground
15	RxE1-	Negative LVDS differential data input (Even data)
16	RxE1+	Positive LVDS differential data input (Even data)
17	GND	Power Ground
18	RxE2-	Negative LVDS differential data input (Even data)
19	RxE2+	Positive LVDS differential data input (Even data)
20	RxECLK-	Negative LVDS differential clock input (Even clock)
21	RxECLK+	Positive LVDS differential clock input (Even clock)
22	RxE3-	Negative LVDS differential data input (Even data)
23	RxE3+	Positive LVDS differential data input (Even data)
24	GND	Power Ground
25	NC	No connection (for AUO test only. Do not connect)
26	NC	No connection (for AUO test only. Do not connect)
27	NC	No connection (for AUO test only. Do not connect)
28	VDD	Power +5V
29	VDD	Power +5V
30	VDD	Power +5V

Note 1: Input signals of odd and even clock shall be the same timing.

AUO Confidential For STAR Internal Use Only 120211/5

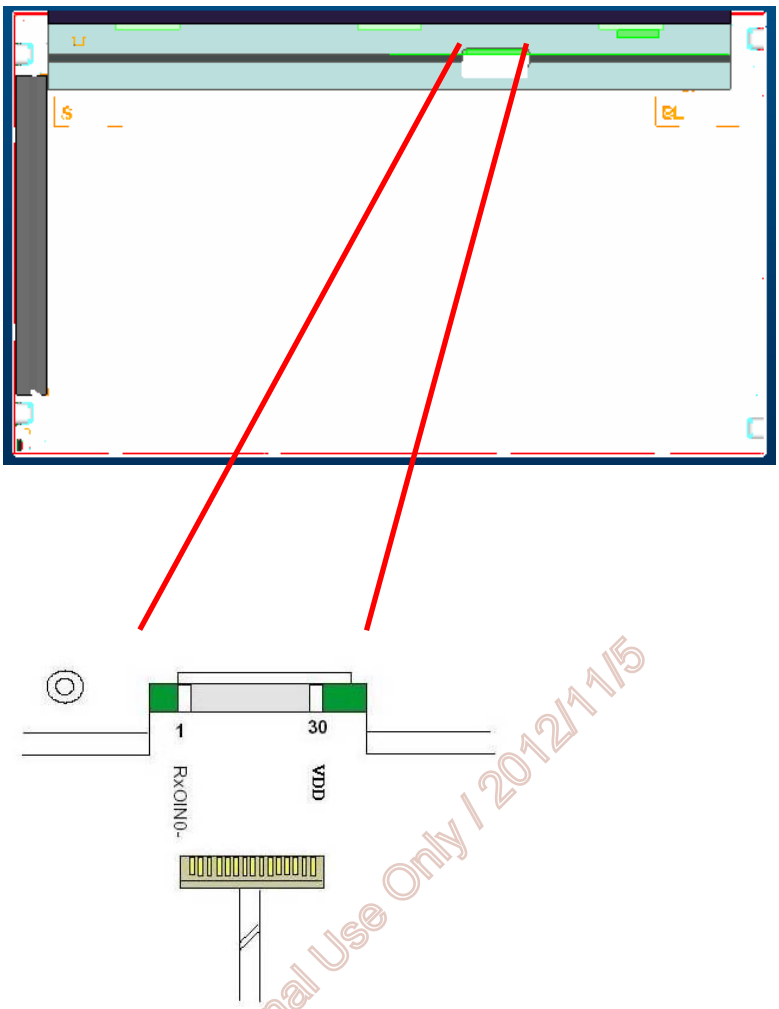

AUO Confidential For STAR Internal Use Only / 2012/11/5

6.4 Timing Characteristics

The input signal timing specifications are shown as the following table

Signal	Item	Symbol	Min	Typ	Max	Unit
Vertical Section	Period	Tv	1092	1130	1818	Th
	Active	Tdisp(v)	1080	1080	1080	Th
	Blanking	Tbp(v)+Tfp(v)+PWvs	12	50	738	Th
Horizontal Section	Period	Th	1034	1050	1100	Tclk
	Active	Tdisp(h)	960	960	960	Tclk
	Blanking	Tbp(h)+Tfp(h)+PWhs	74	90	140	Tclk
Clock	Period	Tclk	10.6	14.0	17.7	ns
	Frequency	Freq	56.5	71.2	94.0	MHz
Frame rate	Frame rate	F	50	60	76	Hz
Hsync Frequency	Hsync Frequency	HFreq	55	68	91	KHz

Note : DE mode only

AUO Confidential For STAR Internal Use Only / 2012/11/5

6.5 Timing diagram

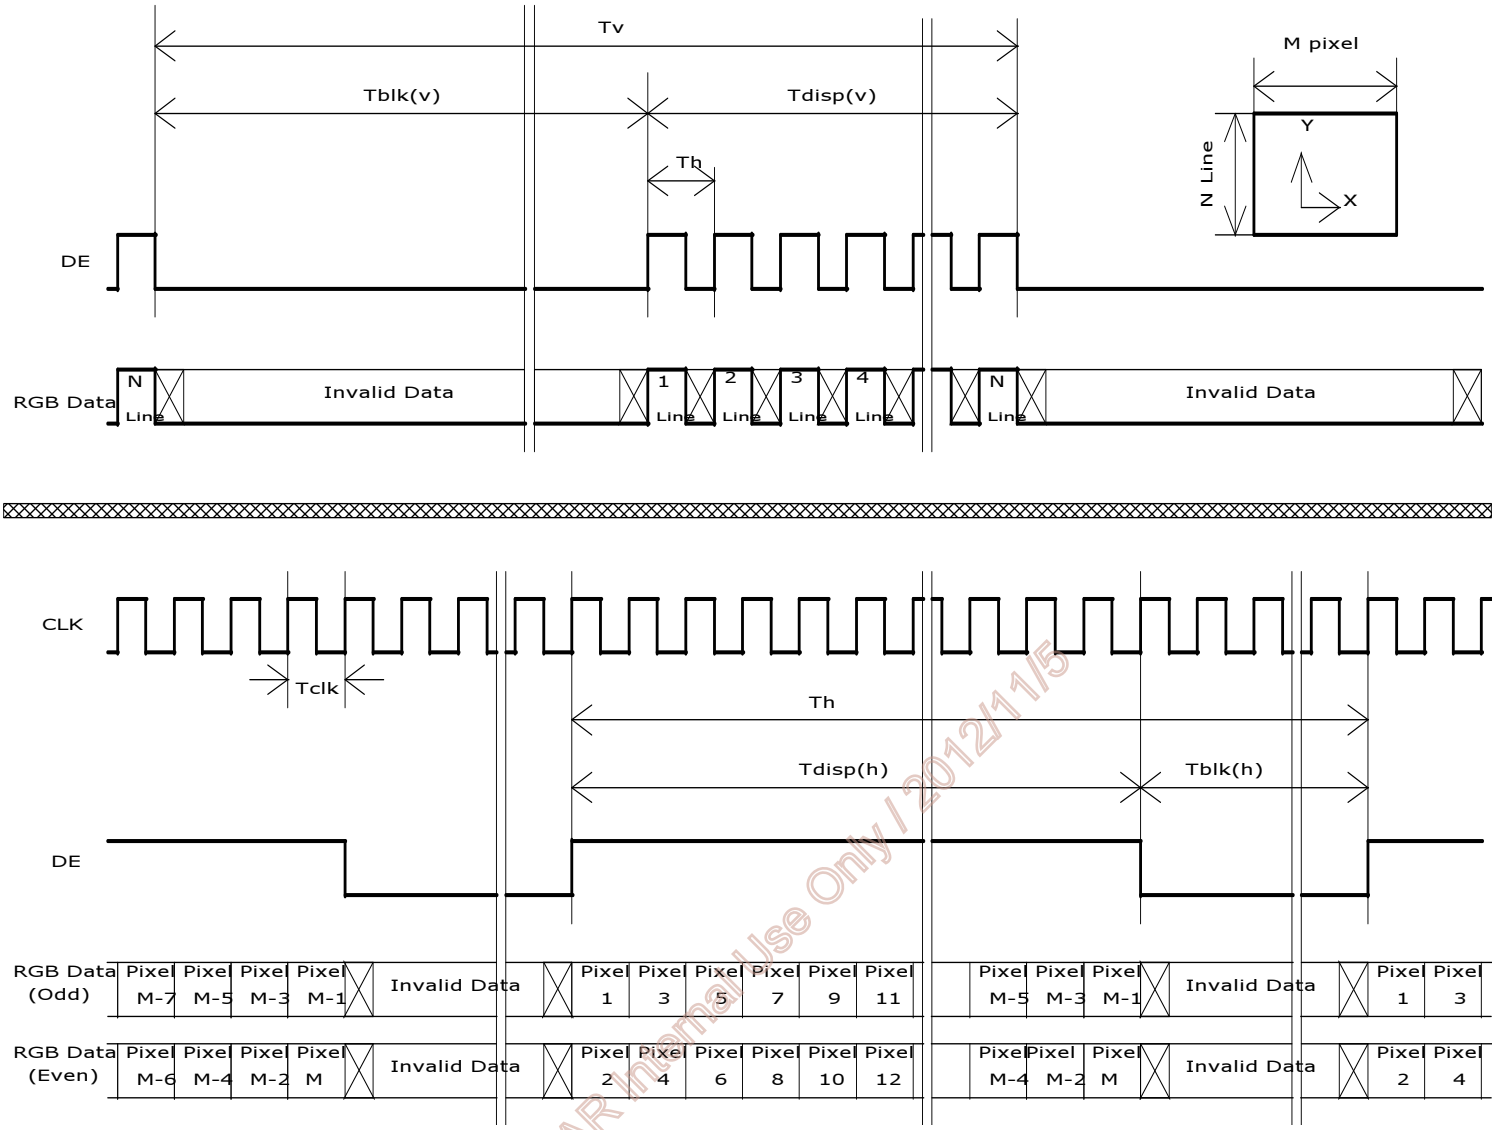

AUO Confidential For STAR Internal Use Only / 2012/11/5

6.6 Power ON/OFF Sequence

VDD power and backlight on/off sequence are as follows. Interface signals are also shown in the chart. Signals from any system shall be Hi-Z state or low level when VDD is off.

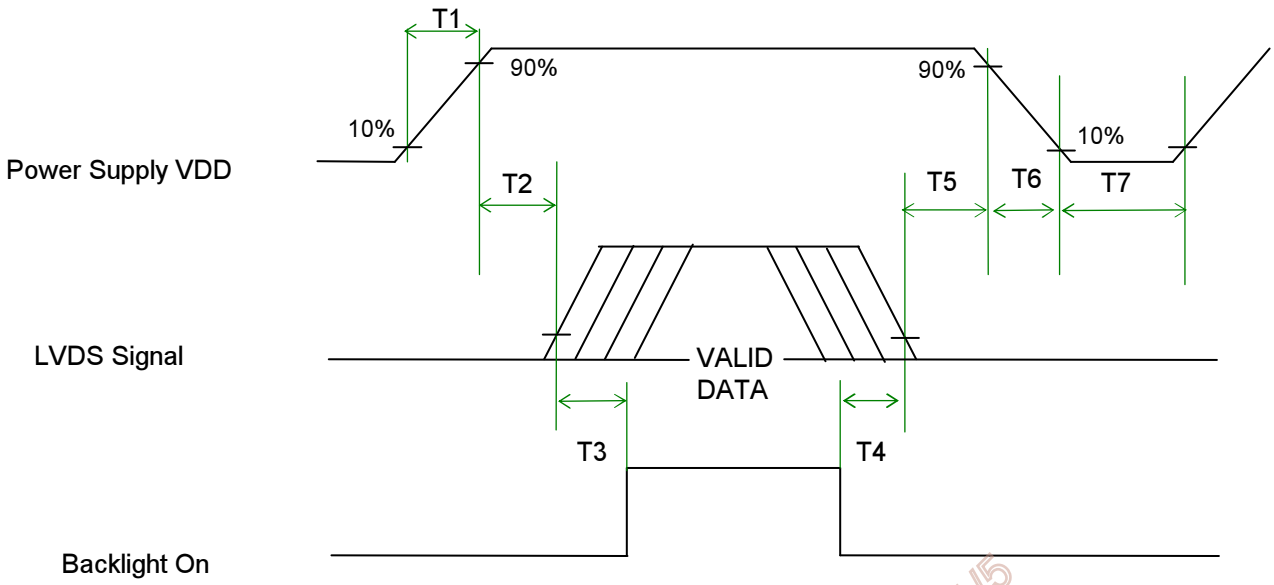

Power Sequence Timing

Parameter	Value			Unit
	Min.	Typ.	Max.	
T1	0.5	-	10	[ms]
T2	0	-	50	[ms]
T3	500	-	-	[ms]
T4	100	-	-	[ms]
T5	0		50	[ms] *Note1,2*
T6	0	-	100	[ms] *Note1,2*
T7	1000	-	-	[ms]

Note1 : Recommend setting T5 = 0ms to avoid electronic noise when VDD is off.

Note2 : During T5 and T6 period , please keep the level of input LVDS signals with Hi-Z state.

AUO Confidential For STAR Internal Use Only / 2012/11/5

7 Connector & Pin Assignment

Physical interface is described as for the connector on module. These connectors are capable of accommodating the following signals and will be following components.

7.1 TFT LCD Module

Connector Name / Designation	Interface Connector / Interface card
Manufacturer	P-TWO, STM
Type Part Number	P-TWO AL230F-A0G1D-P STM MSCKT2407P30HB
Mating Housing Part Number	FI-X30HL (Locked Type)

7.1.1 Pin Assignment

Pin#	Signal Name	Pin#	Signal Name
1	RxO0-	2	RxO0+
3	RxO1-	4	RxO1+
5	RxO2-	6	RxO2+
7	GND	8	RxOCLKIN-
9	RxOCLKIN+	10	RxO3-
11	RxO3+	12	RxE0-
13	RxE0+	14	GND
15	RxE1-	16	RxE1+
17	GND	18	RxE2-
19	RxE2+	20	RxECLKIN-
21	RxECLKIN+	22	RxE3-
23	RxE3+	24	GND
25	NC (for AUO test only. Do not connect)	26	NC (for AUO test only. Do not connect)
27	NC (for AUO test only. Do not connect)	28	VDD
29	VDD	30	VDD

AUO Confidential For STAR Internal Use Only / 2012/11/5

7.2 LED Connector on Backlight Unit.

This connector is mounted on LED light-bar.

Connector Name / Designation	Light Bar Connector
Manufacturer	ENTERY
Type Part Number	3707K-S06N-21R
Mating Type Part Number	ENTERY Non-Locking type: H112K-P06N-00B Locking type: H112K-P06N-03B

7.2.1 LED Pin assignment

Pin#	Signal Name
1	IRLED1 (current out)
2	IRLED2 (current out)
3	VLED (voltage in)
4	VLED (voltage in)
5	IRLED3 (current out)
6	IRLED4 (current out)

AUO Confidential For STAR Internal Use Only 2012/11/5

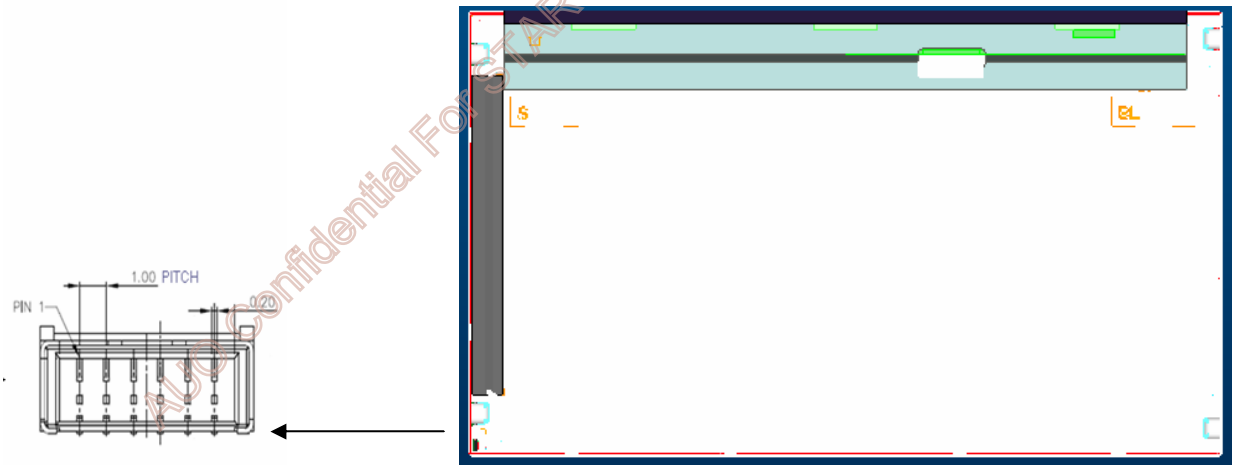

7.2.2 LED Connector dimension

$H \times V \times D = 13.9 \times 3.00 \times 4.25, Pitch = 1.0(unit = mm)$

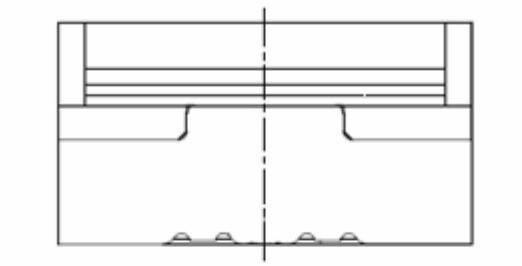

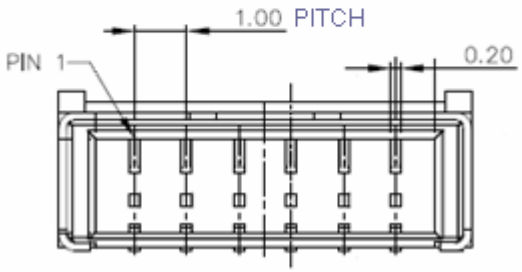

7.2.3 LED Mating housing dimension

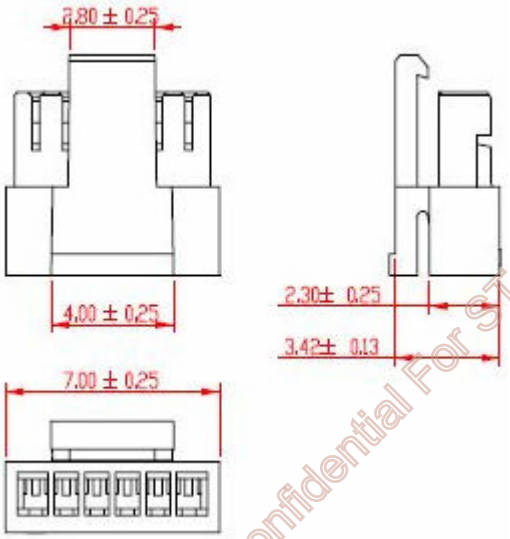

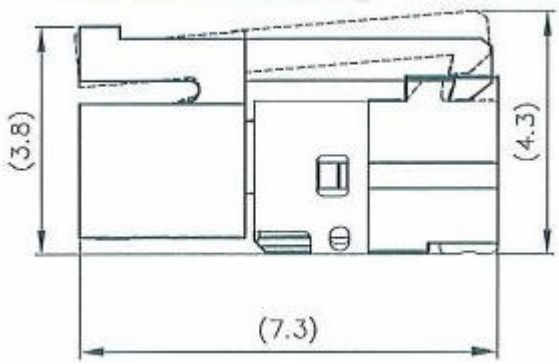

AUO Confidential For STAR Internal Use Only / 2012/11/5

8 Reliability Test

Environment test conditions are listed as following table.

Items	Required Condition	Note
Temperature Humidity Bias (THB)	Ta= 50□, 80%RH, 300hours	
High Temperature Operation (HTO)	Ta= 50□, 50%RH, 300hours	
Low Temperature Operation (LTO)	Ta= 0□, 300hours	
High Temperature Storage (HTS)	Ta= 60□, 300hours	
Low Temperature Storage (LTS)	Ta= -20□, 300hours	
Vibration Test (Non-operation)	Acceleration: 1.5 Grms Wave: Random Frequency: 10 - 200 Hz Sweep: 30 Minutes each Axis (X, Y, Z)	
Shock Test (Non-operation)	Acceleration: 50 G Wave: Half-sine Active Time: 20 ms Direction: ±X, ±Y, ±Z (one time for each Axis)	
Drop Test	Height: 60 cm, package test	
Thermal Shock Test (TST)	-20□/30min, 60□/30min, 100 cycles	***1***
On/Off Test	On/10sec, Off/10sec, 30,000 cycles	
ESD (Electro Static Discharge)	Contact Discharge: ± 15KV, 150pF(330Ω) 1sec, 8 points, 25 times/ point.	***2***
	Air Discharge: ± 15KV, 150pF(330Ω) 1sec 8 points, 25 times/ point.	
Altitude Test	Operation:18,000 ft Non-Operation:40,000 ft	

Note 1: The TFT-LCD module will not sustain damage after being subjected to 100 cycles of rapid temperature change. A cycle of rapid temperature change consists of varying the temperature from -20□ to 60□, and back again. Power is not applied during the test. After temperature cycling, the unit is placed in normal room ambient for at least 4 hours before power on.

Note 2: EN61000-4-2, ESD class B: Certain performance degradation allowed
No data lost
Self-recoverable
No hardware failures.

AUO Confidential For SAR Internal Use Only / 2012/11/15

9 Shipping Label

The label is on the panel as shown below:

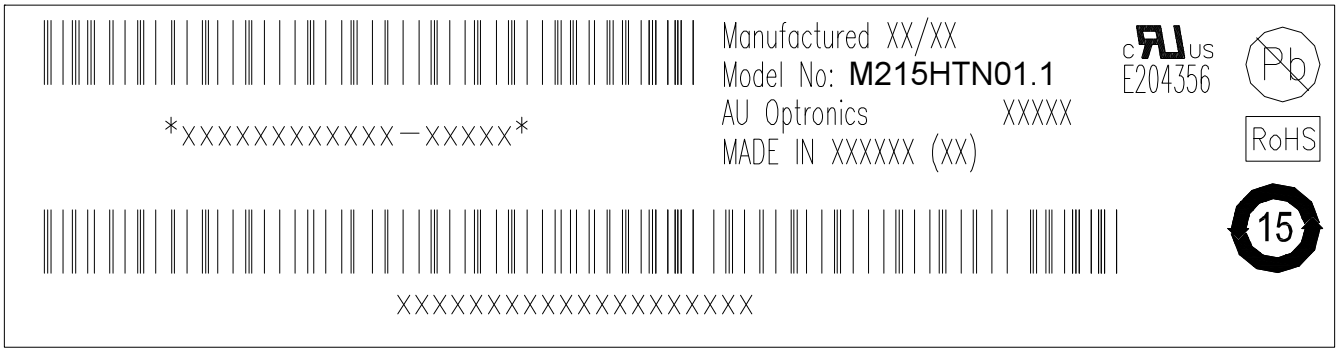

Note 1: For Pb Free products, AUO will add for identification.

Note 2: For RoHS compatible products, AUO will add for identification.

Note 3: For China RoHS compatible products, AUO will add for identification.

Note 4: The Green Mark will be presented only when the green documents have been ready by AUO Internal Green Team.

AUO Confidential For STAR Internal Use Only / 2012/11/5

10 Mechanical Characteristics

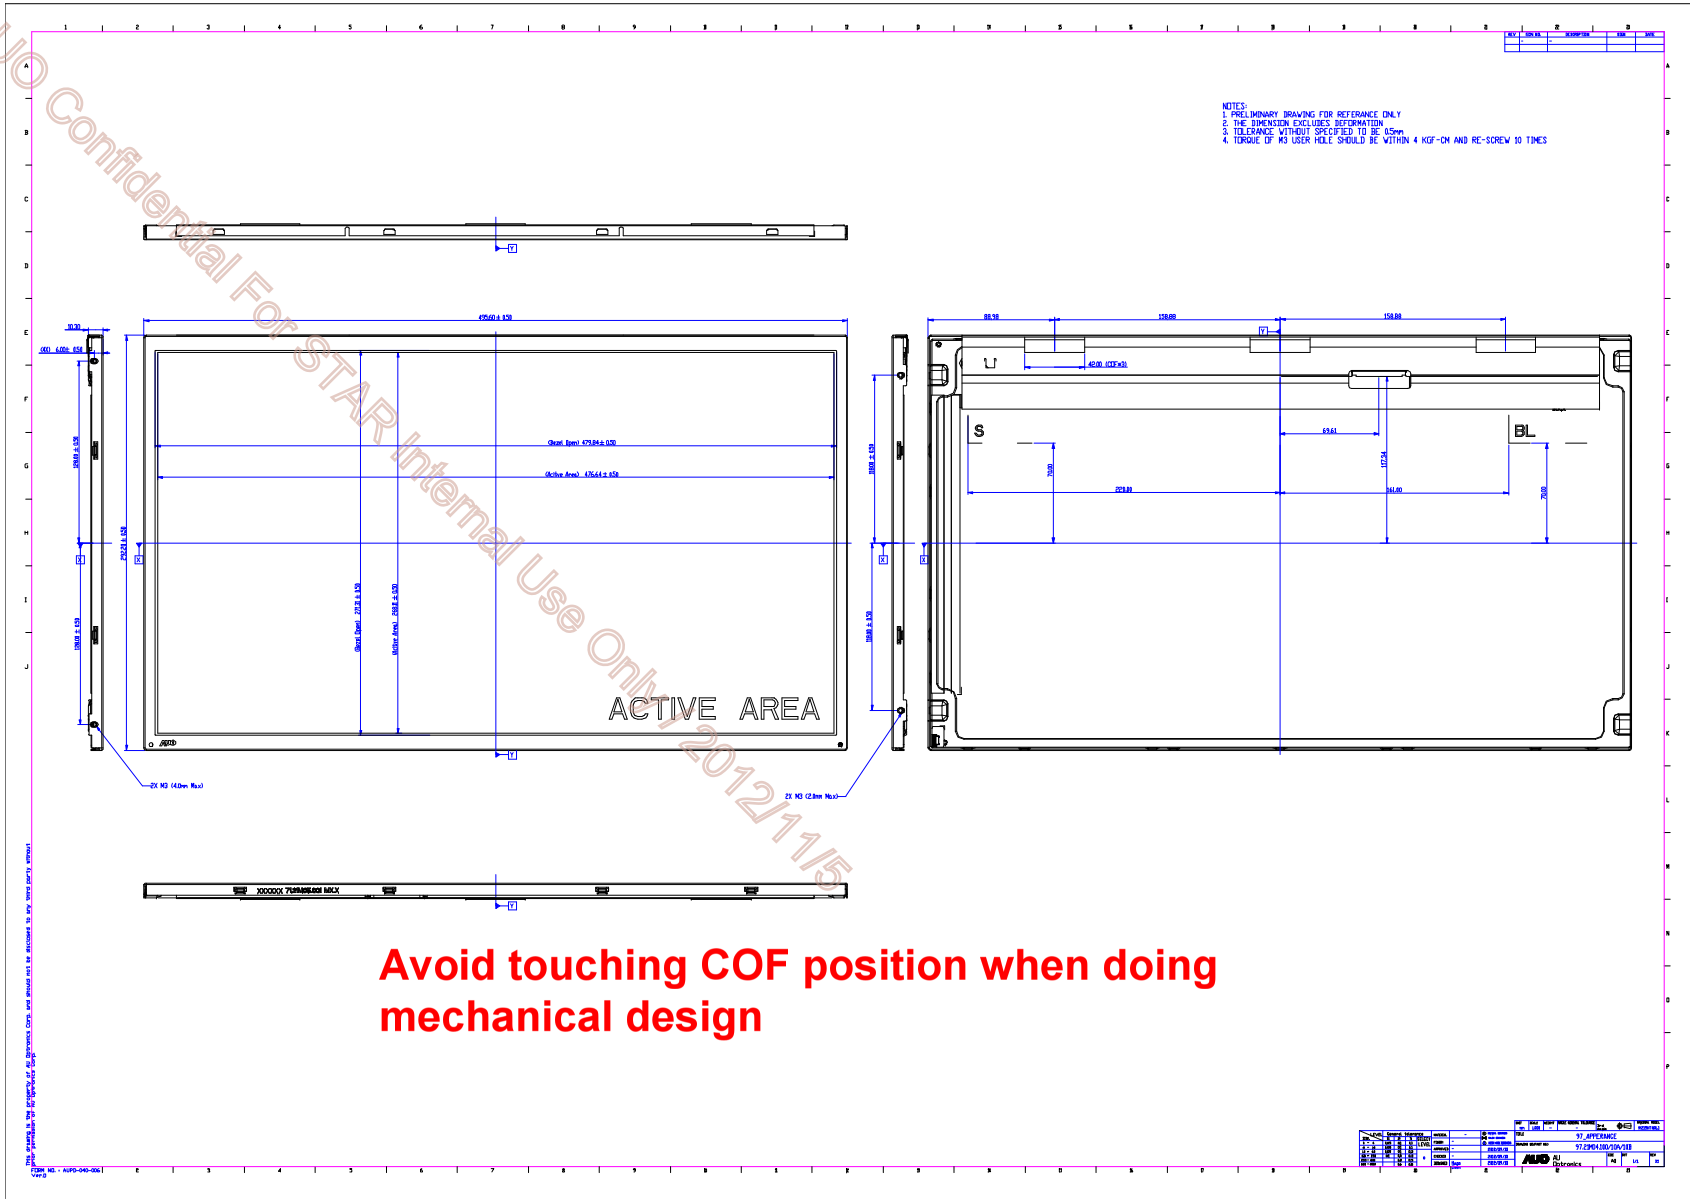

AUO Confidential For STAR Internal Use Only 2012/11/5

Avoid touching COF position when doing mechanical design

11. Packing Specification

11.1 Packing Flow

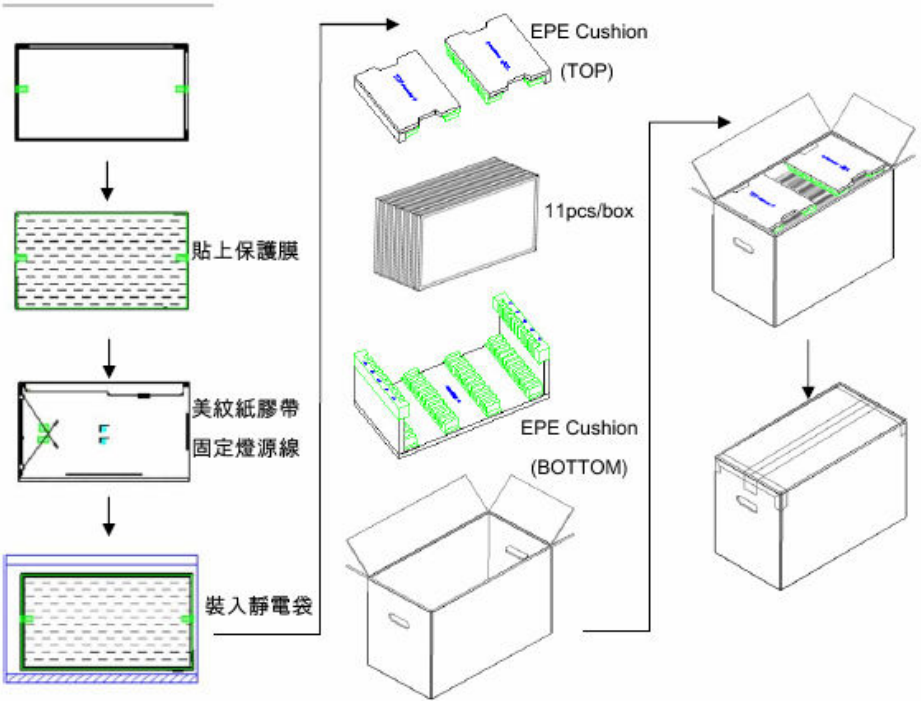

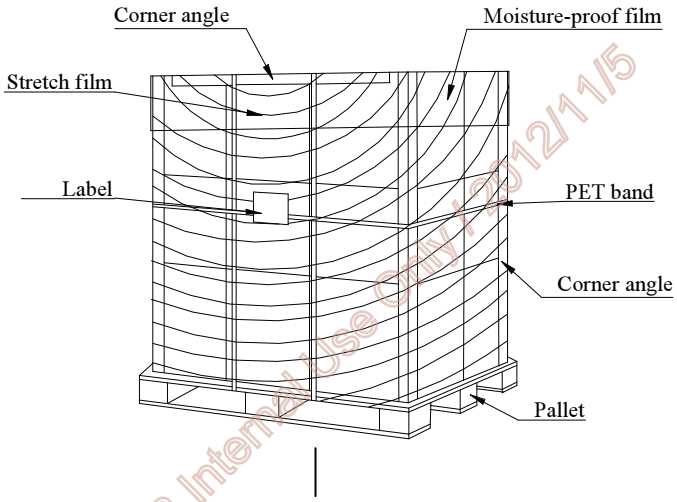

AUO Confidential For STAR Internal use only 2012/11/5

11. 2 Pallet and shipment information

	Item	Specification			Remark
		Q'ty	Dimension	Weight(kg)	
1	Panel	1	495.6(W)mm × 292.2(H)mm × 10.3(D)mm	1.75	
2	Cushion	1	-	0.40	
3	Box	1	556(L)mm x 292(W)mm x 375(H)mm	0.95	without Panel & cushion
4	Packing Box	11 pcs/Box	556(L)mm x 292(W)mm x 375(H)mm	20.6	with panel & cushion
5	Pallet	1	1150(L)mm x 910(W)mm x 132(H)mm	12.00	
6	Pallet after Packing	18 boxes/pallet	1150(L)mm x 910(W)mm x 1257(H)mm	382.8	

AUO Confidential For STAR Internal Use Only / 2012/11/5