


# 2.5 mm Stereo

161-7000-EX

KOBICONN

2.5 mm Stereo

161-7000-EX

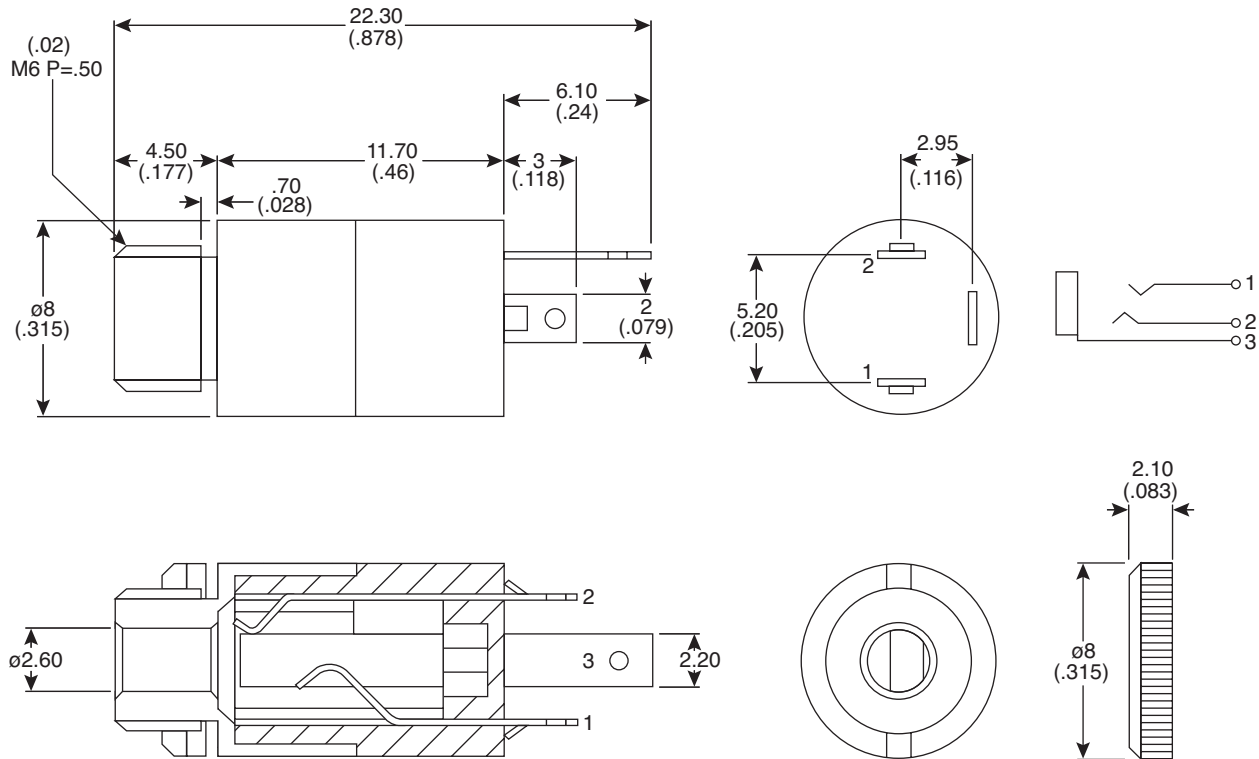

Dimensions: mm (In.)

SPECIFICATIONS	
Contact Resistance:	30 mΩ max.
Insulation Resistance:	100 MΩ min. @500VDC
Dielectric Strength:	500 VAC for one minute
Life Cycle:	5000 cycles min.
Operation Temperature:	-25°C to 80°C
Insertion & Extraction Force:	4N - 20N (0.4 kgf. - 2kgf.)
Contacts:	Nickel plated brass
Body:	PBT - G30%
Mating Plugs:	171-3305, 171-3306, 171-3406
RoHS Compliant by Exemption	

Date Last Revised: 12-27-05

Available from Mouser Electronics  
1-800-346-6873  
www.mouser.com

KC-300946

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Kobiconn:](#)

[161-7000-EX](#)