


Micrograph of the 1600x1600 μm^2 die with a grid overlay. The grid shows rows and columns of pads. Labels around the grid identify specific rows and columns, such as "17 DVDD", "18 DVSS", "19 pad_raw[19]", etc. The central area contains a dense array of pads. The bottom-left corner shows a "spina" logo. The top-right corner shows a QR code labeled "ID QR".

TTP2_tt_gf_wrapper_6_4 · slot 1x1 · 1x1-mezzanine.kicad_pcb · die 3932×5122 μm

ALIGN DIE QR CODE WITH BOARD ROCKET / 将芯片二维码与板上火箭对齐

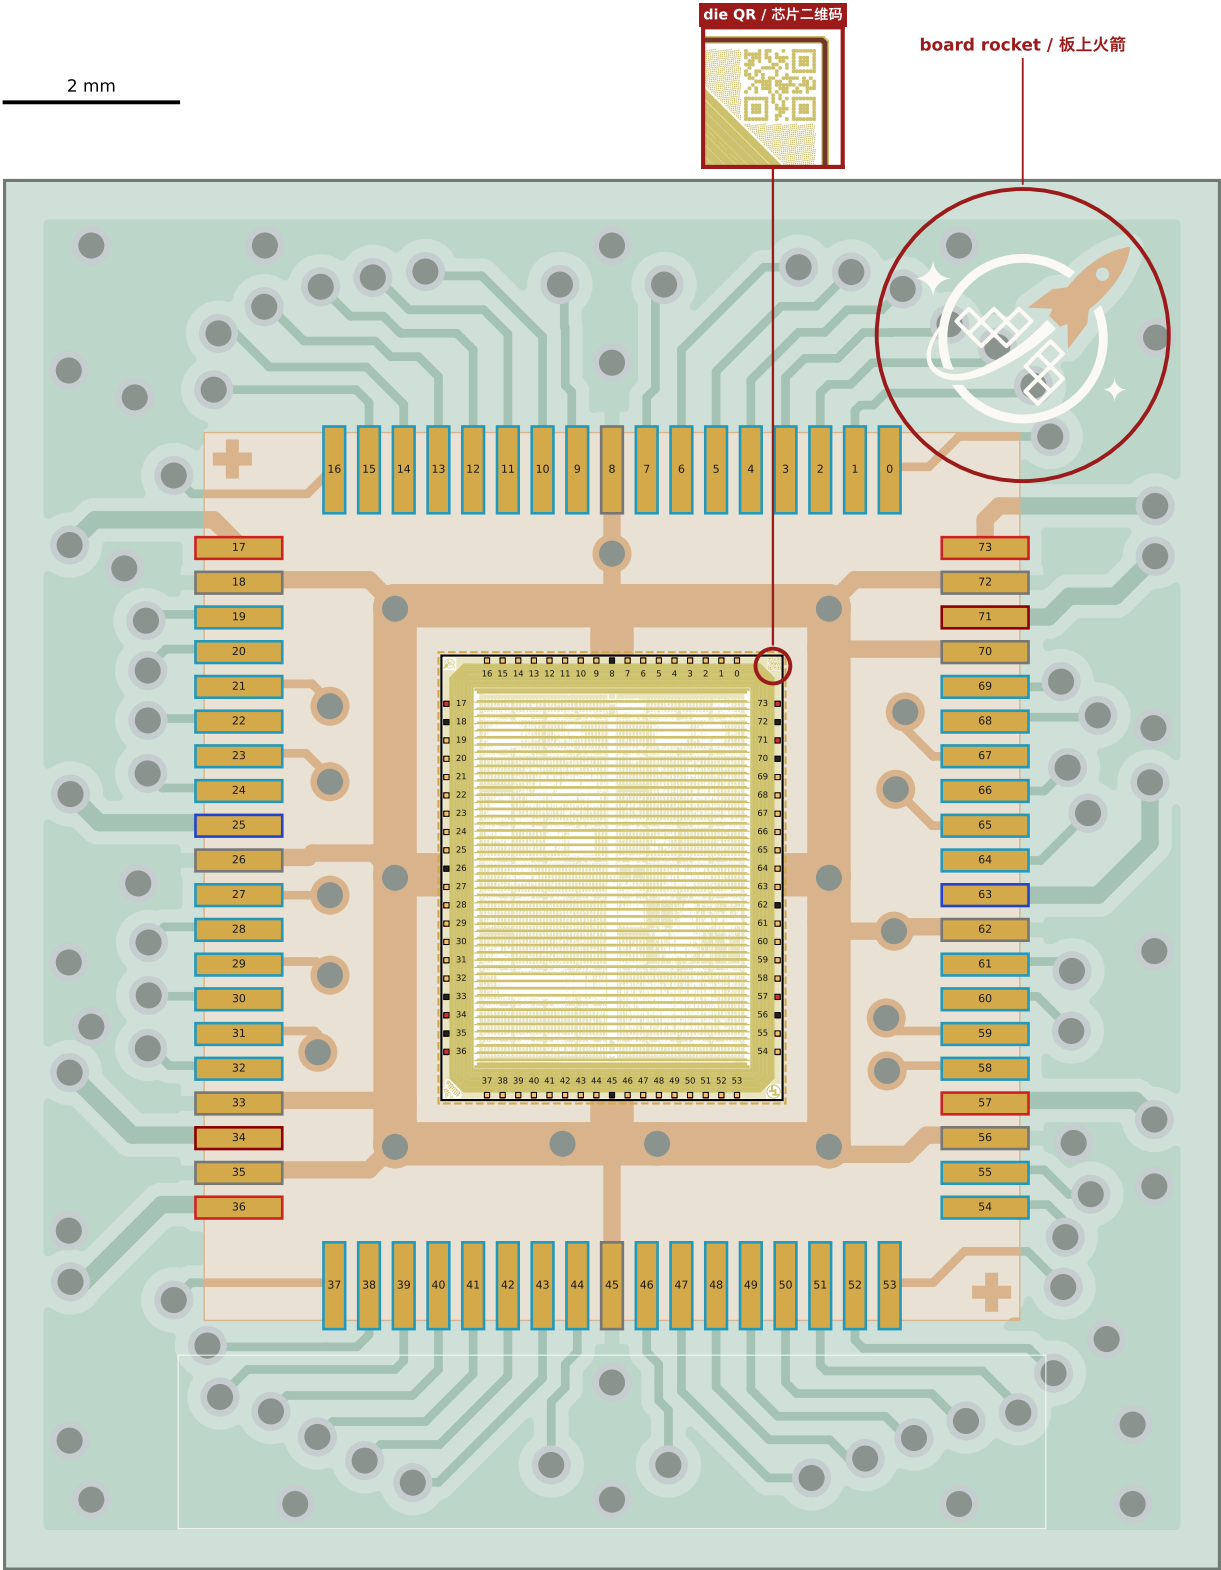

die net class (pads)

DVSS

DVDD

signal

COB pin class / board

GND

VDD_IO

VDD_CORE

PWR_AUX


signal

front Cu

via

TTP2_tt_gf_wrapper_6_4 · slot 1x1 · 1x1-mezzanine.kicad_pcb · 74 wires, length 1.77-2.64 mm

2 mm

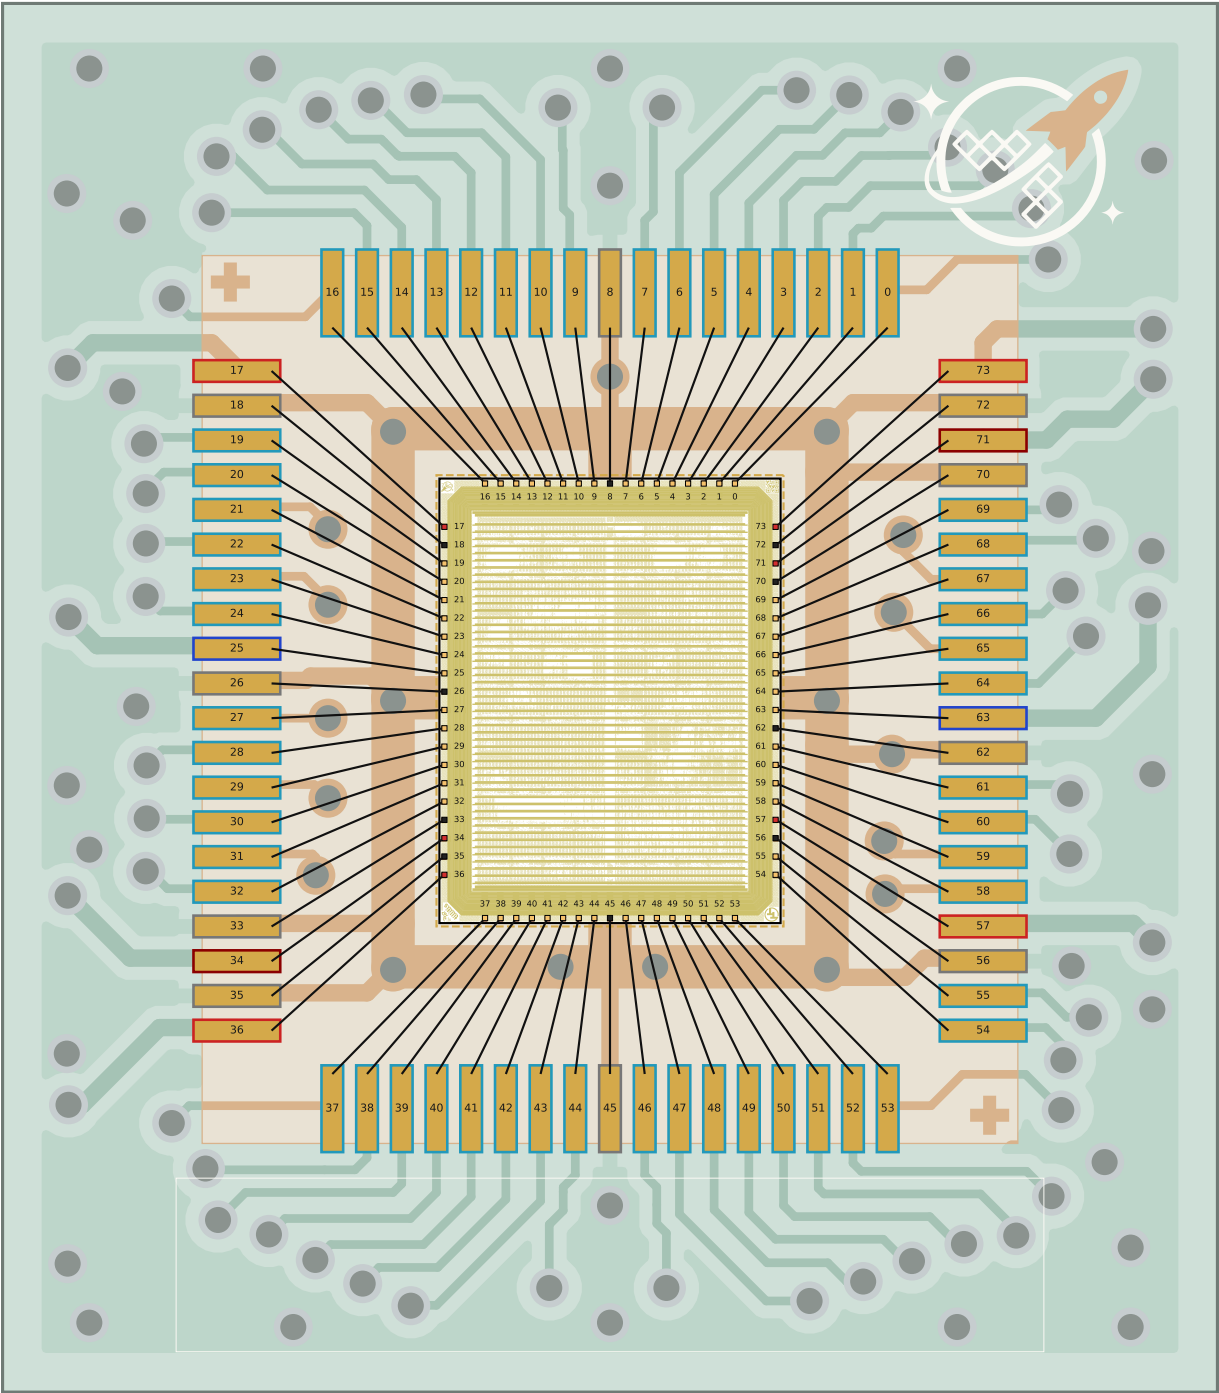

die net class (pads)

DVSS DVDD signal

COB pin class / board

GND VDD_IO VDD_CORE PWR_AUX signal front Cu via