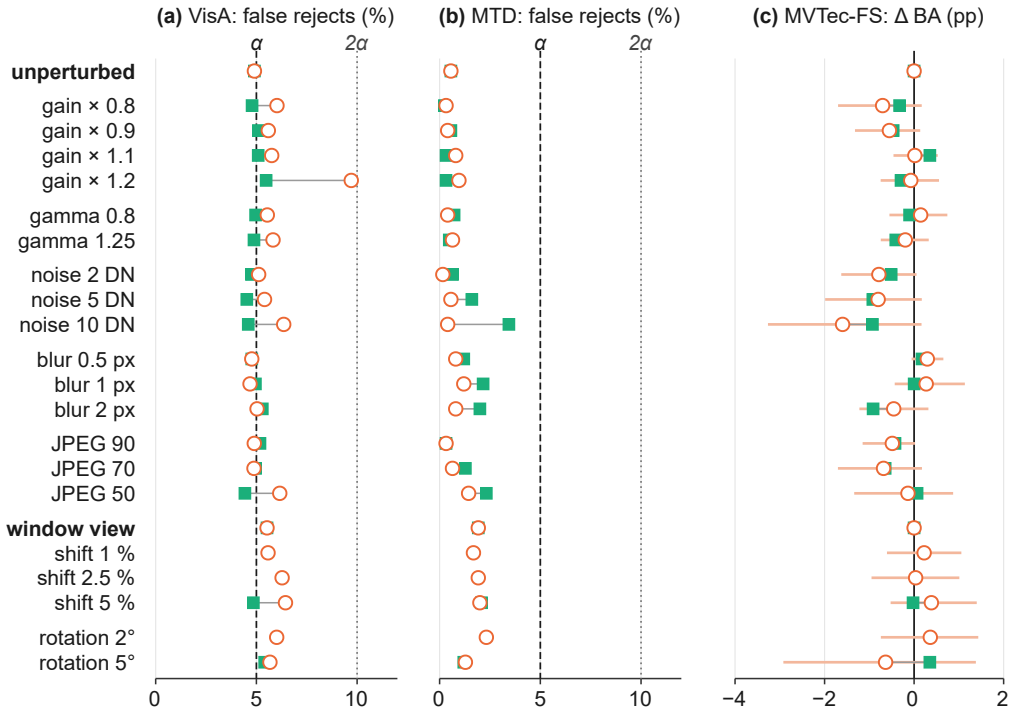

(a) VisA: false rejects (%)
(b) MTD: false rejects (%)
(c) MVTec-FS: Δ BA (pp)
α
2α
α
2α
unperturbed
gain × 0.8
gain × 1.1
gain × 0.9
gain × 1.2
gamma 0.8
gamma 1.25
noise 2 DN
noise 5 DN
noise 10 DN
blur 0.5 px
blur 1 px
blur 2 px
JPEG 90
JPEG 70
JPEG 50
window view
shift 1 %
shift 2.5 %
shift 5 %
rotation 2°
rotation 5°
0
5
10
0
5
10
−4
−2
0
2
without recalibration
after recalibration (bank and limit rebuilt from conforming parts)
window view: part shifted or rotated inside the original image, no padding