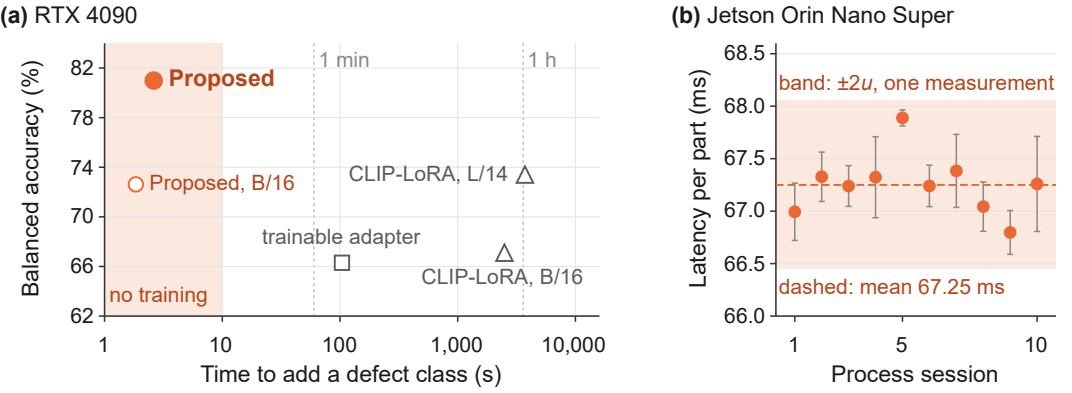
(a) RTX 4090
Balanced accuracy (%)
82
78
74
70
66
62
1 min
1 h
Proposed
Proposed, B/16
CLIP-LoRA, L/14
trainable adapter
CLIP-LoRA, B/16
no training
1
10
100
1,000
10,000
Time to add a defect class (s)
(b) Jetson Orin Nano Super
Latency per part (ms)
68.5
68.0
67.5
67.0
66.5
66.0
band: ±2u, one measurement
dashed: mean 67.25 ms
1
5
10
Process session