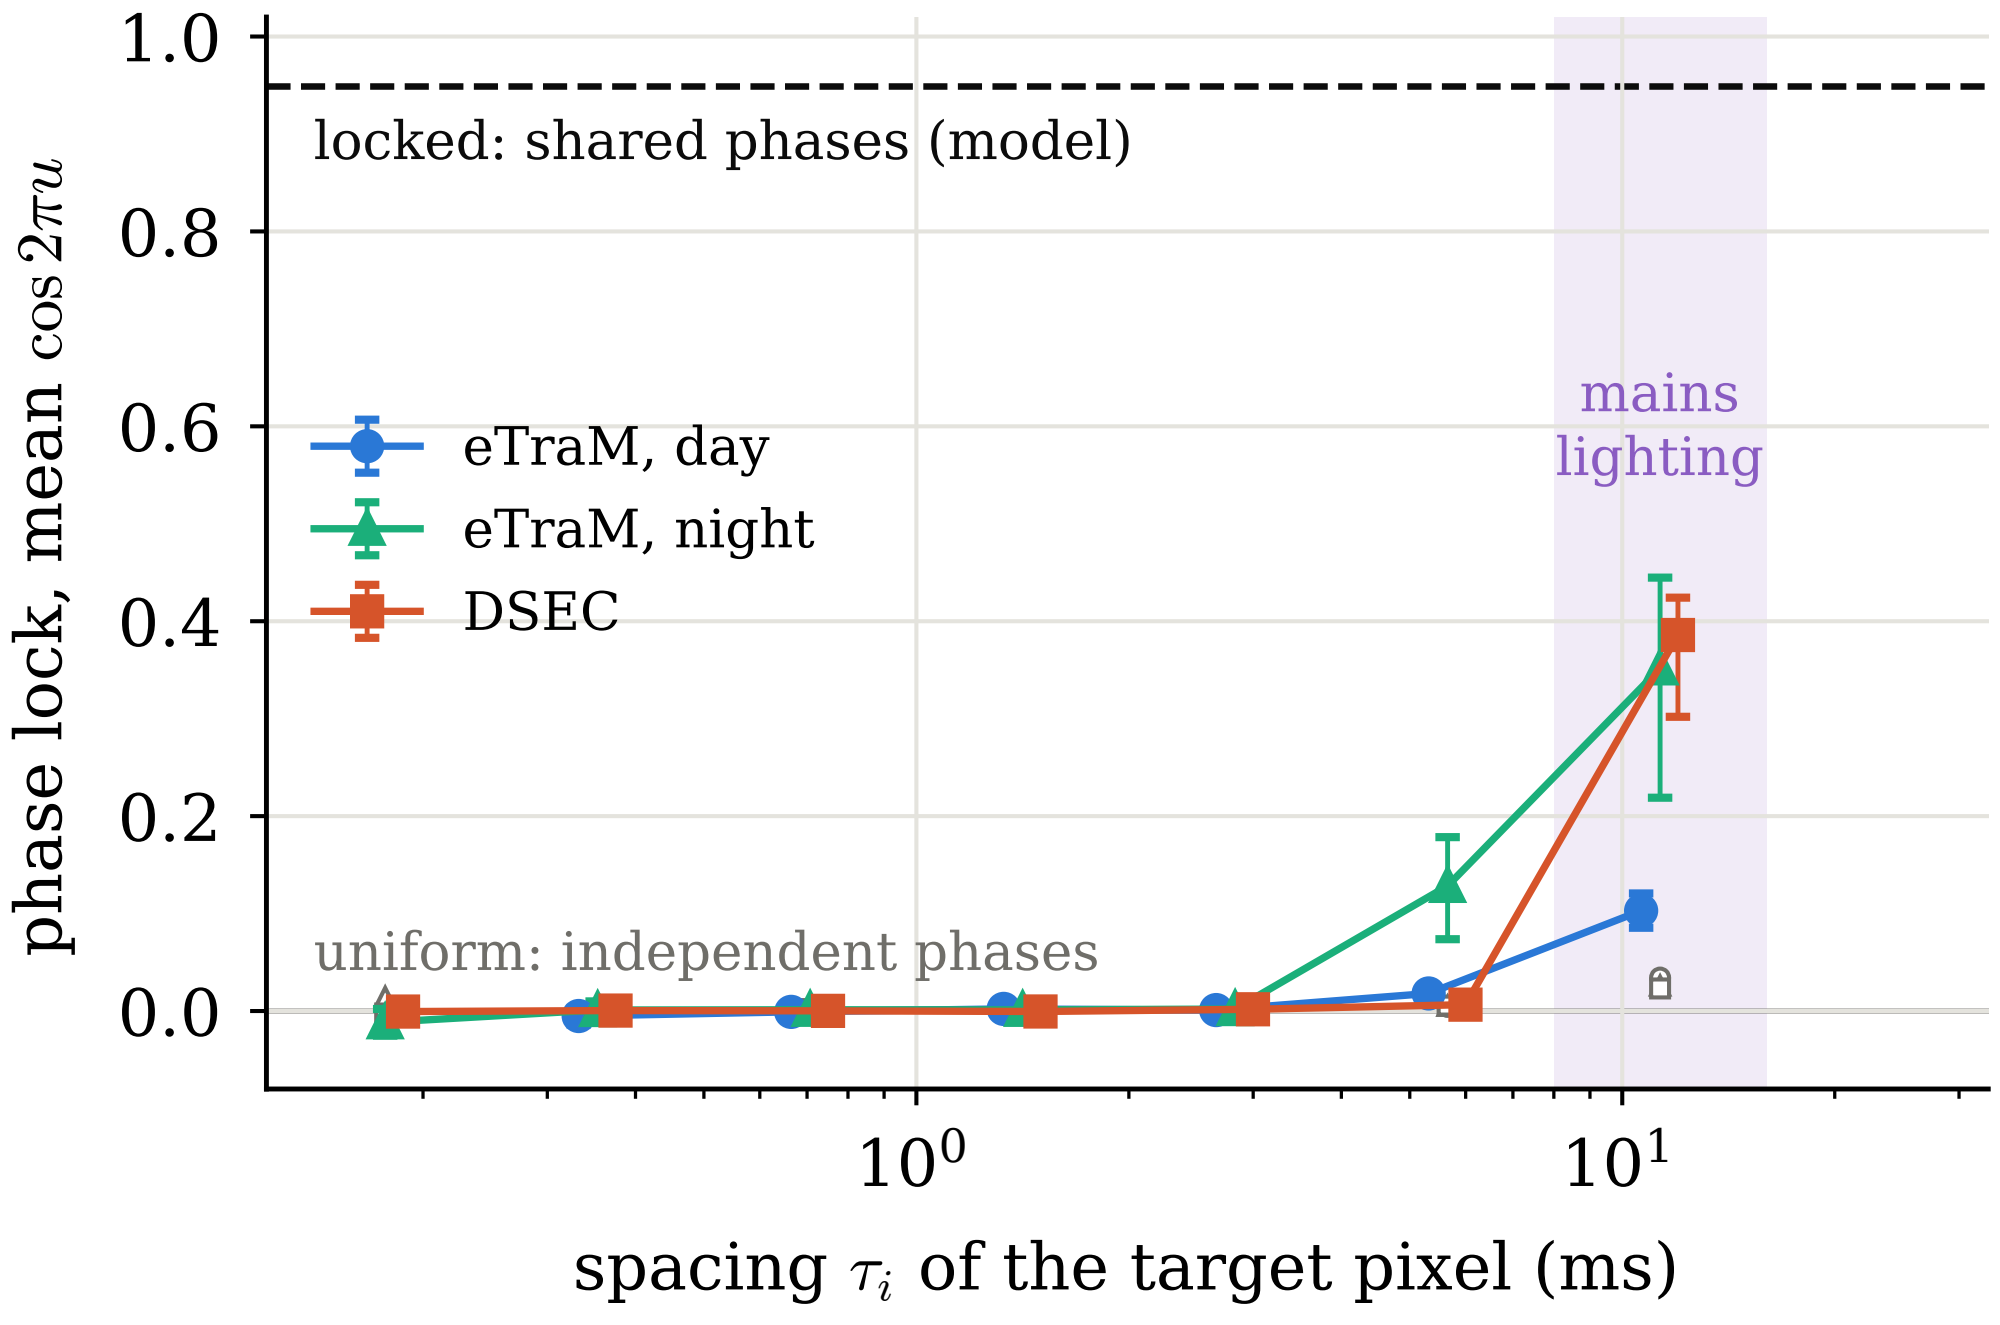
1.0
0.8
0.6
0.4
0.2
0.0
phase lock, mean $\cos 2\pi u$
locked: shared phases (model)
eTraM, day
eTraM, night
DSEC
mains
lighting
uniform: independent phases
10^0
10^1
spacing τ_i of the target pixel (ms)