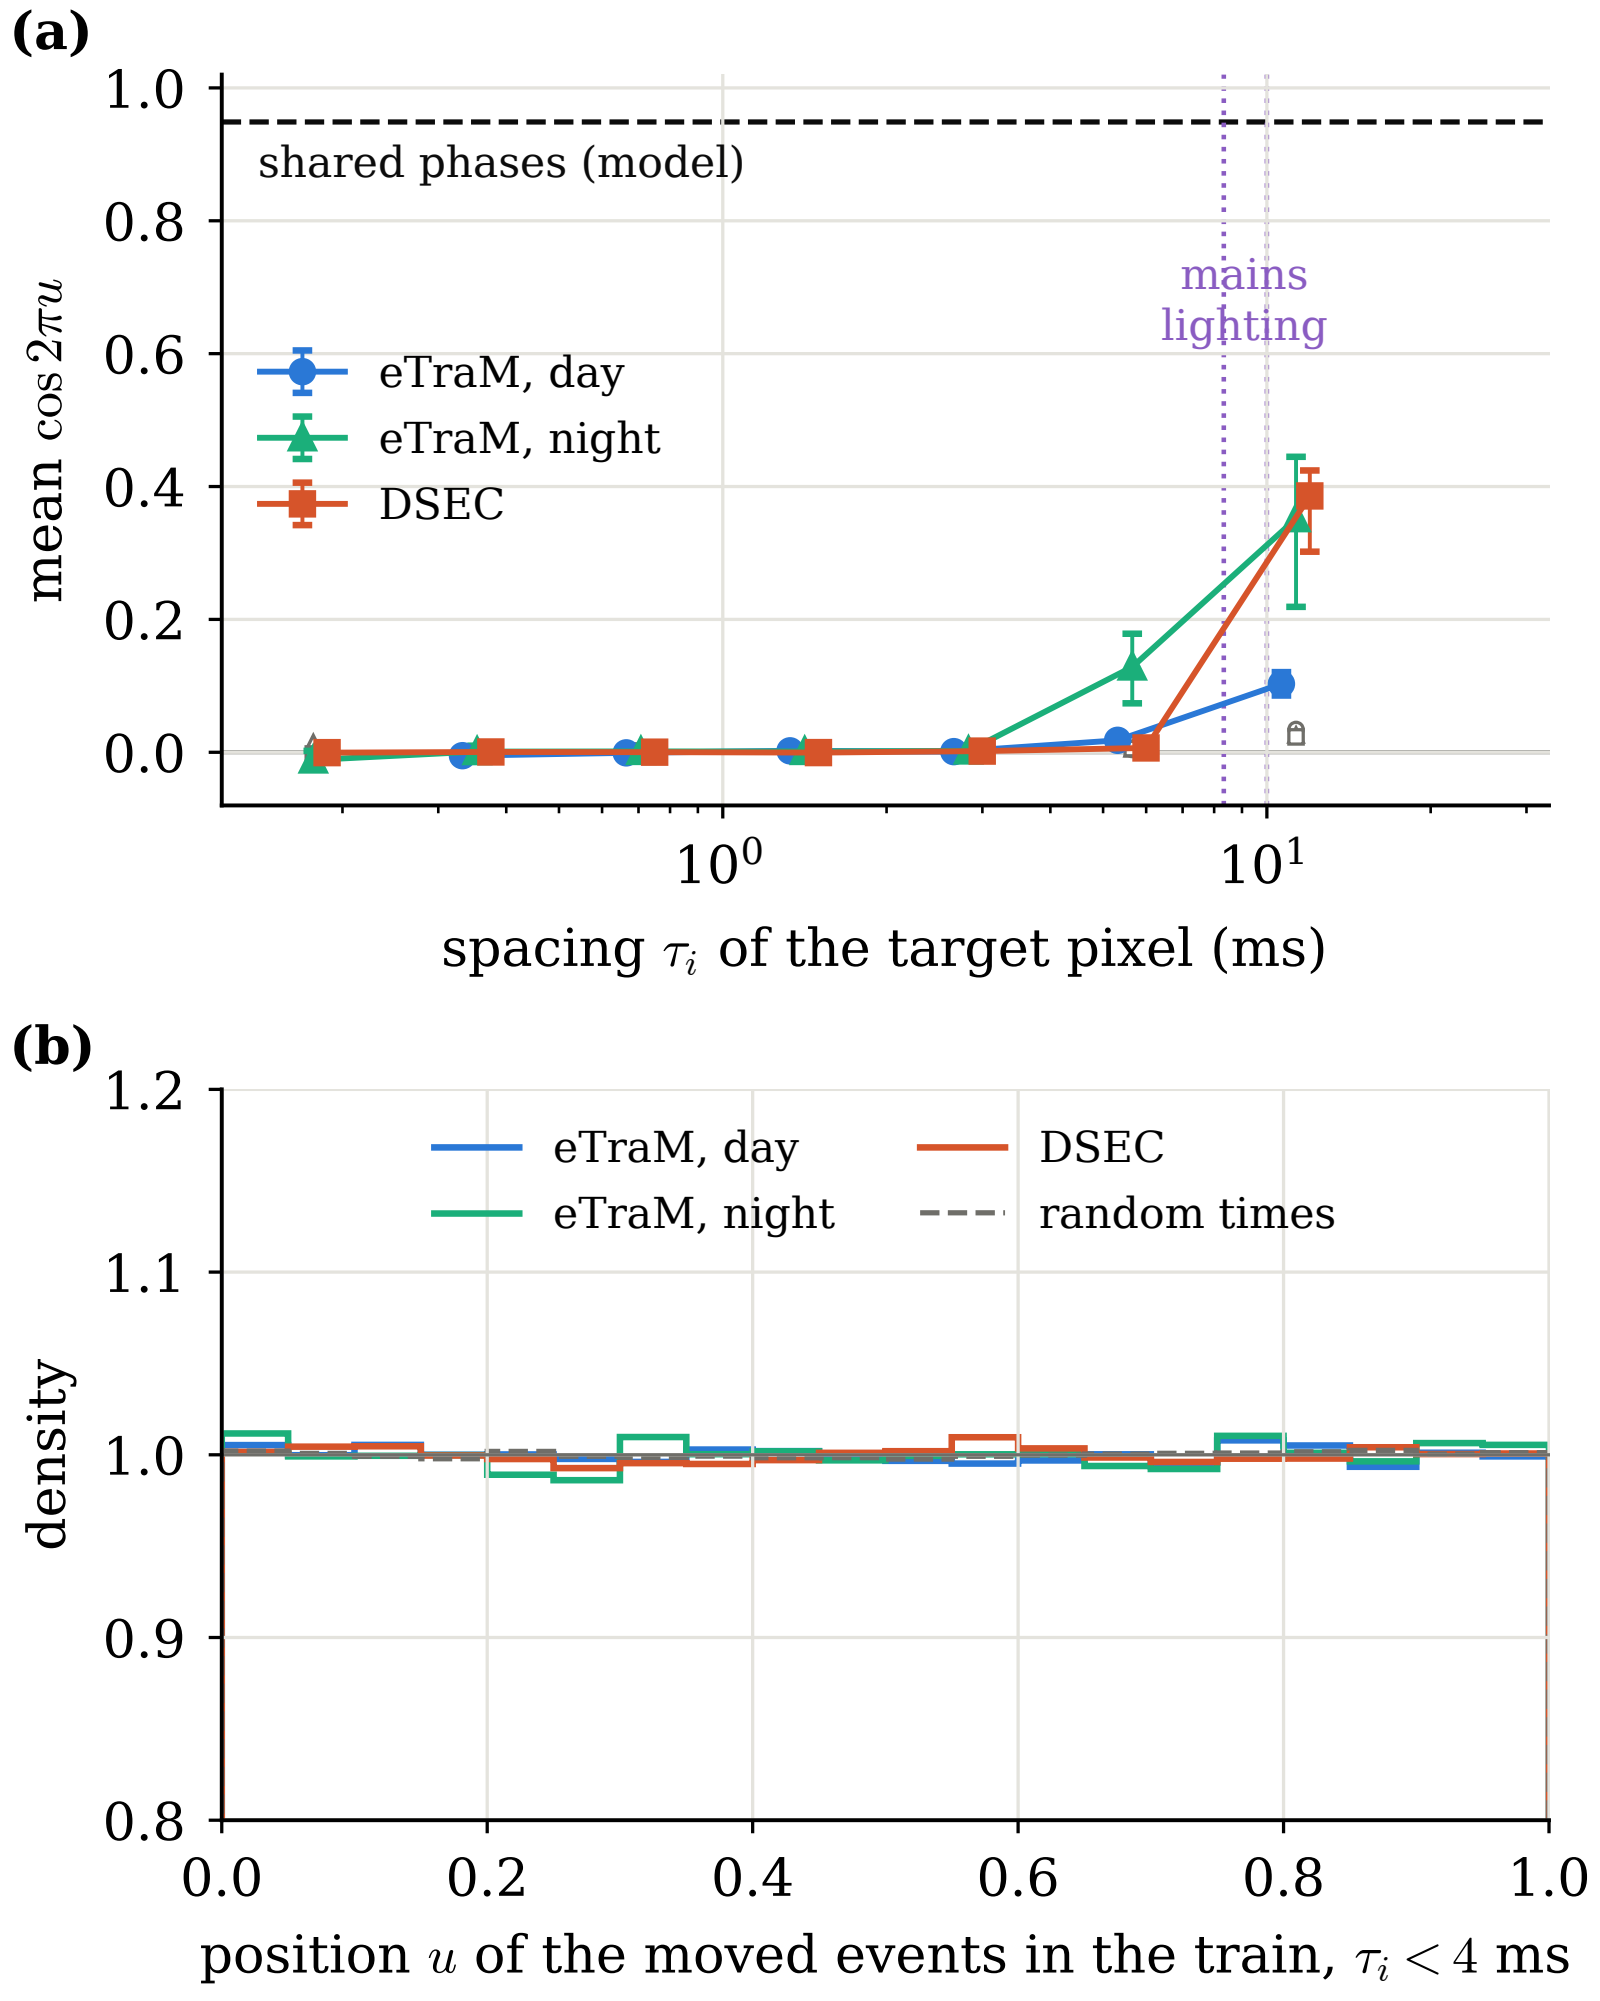
(a)
1.0
0.8
0.6
0.4
0.2
0.0
mean $\cos 2\pi u$
shared phases (model)
mains
lighting
eTraM, day
eTraM, night
DSEC
10^0
10^1
spacing τ_i of the target pixel (ms)
(b)
1.2
1.1
1.0
0.9
0.8
density
eTraM, day
eTraM, night
DSEC
random times
0.0
0.2
0.4
0.6
0.8
1.0
position u of the moved events in the train, $\tau_i < 4$ ms