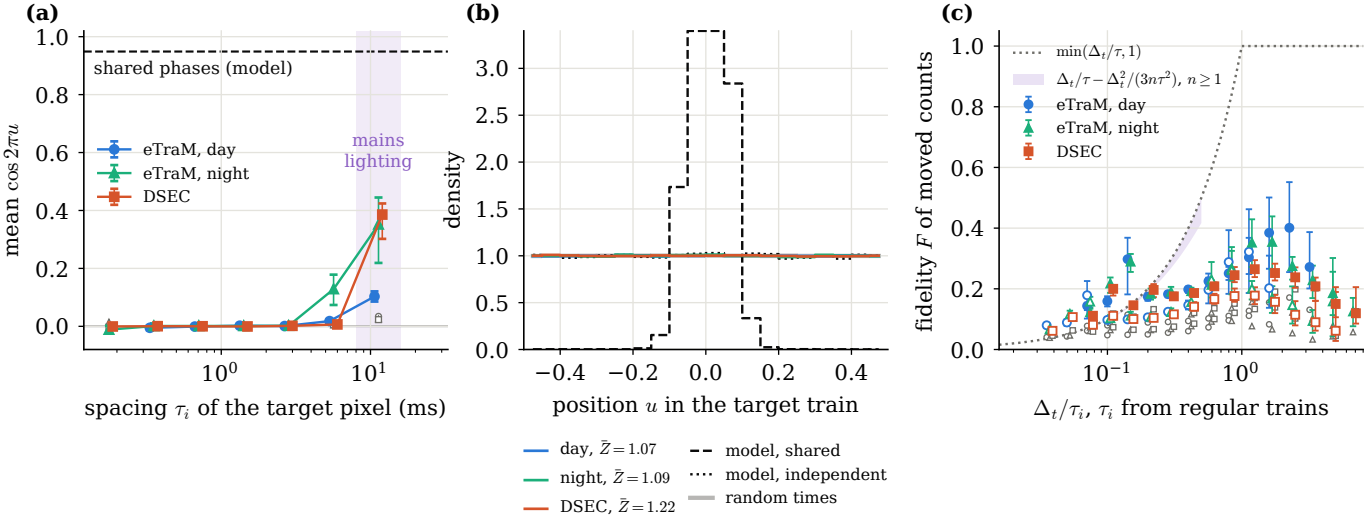
(a)
shared phases (model)
eTraM, day
eTraM, night
DSEC
mains
lighting
mean $\cos 2\pi u$
spacing τ_i of the target pixel (ms)
(b)
density
position u in the target train
(c)
$\min(\Delta_t/\tau, 1)$
$\Delta_t/\tau - \Delta_t^2/(3n\tau^2)$, $n \geq 1$
eTraM, day
eTraM, night
DSEC
fidelity F of moved counts
Δ_t/τ_i, τ_i from regular trains
day, $\bar{Z} = 1.07$
night, $\bar{Z} = 1.09$
DSEC, $\bar{Z} = 1.22$
model, shared
model, independent
random times