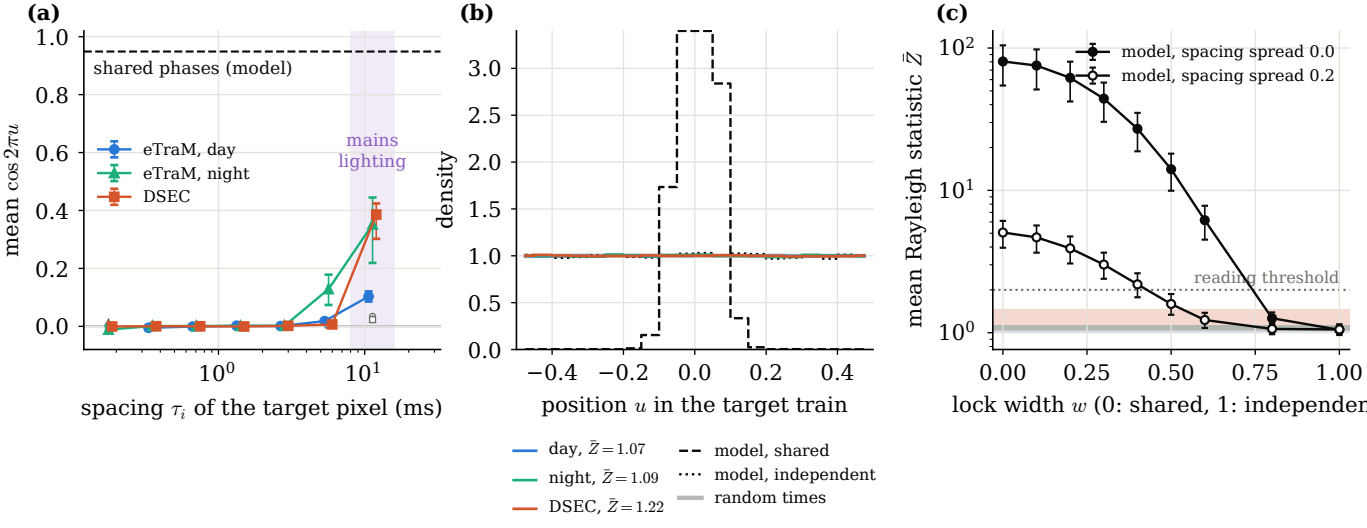
(a)
shared phases (model)
eTraM, day
eTraM, night
DSEC
mains lighting
mean cos 2πτu
spacing τ_i of the target pixel (ms)
(b)
density
position u in the target train
(c)
model, spacing spread 0.0
model, spacing spread 0.2
reading threshold
mean Rayleigh statistic Z̄
lock width w (0: shared, 1: independen
day, Z̄ = 1.07
night, Z̄ = 1.09
DSEC, Z̄ = 1.22
model, shared
model, independent
random times