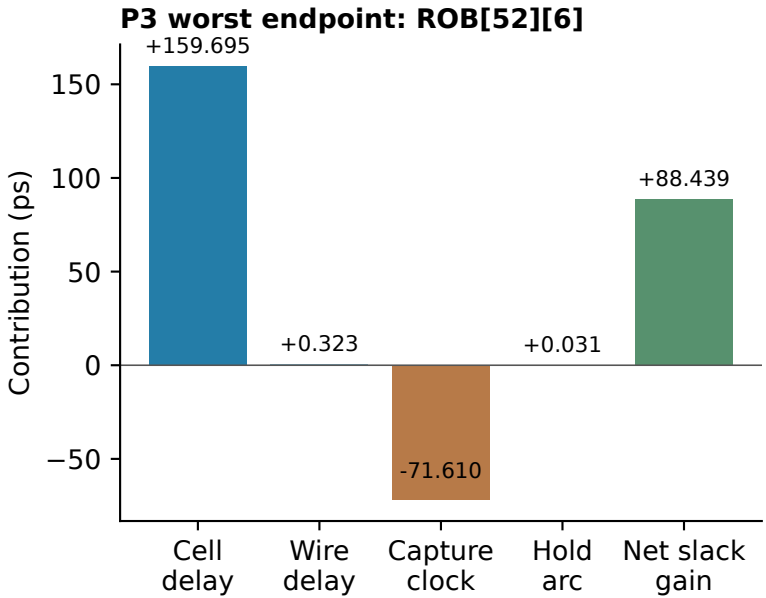

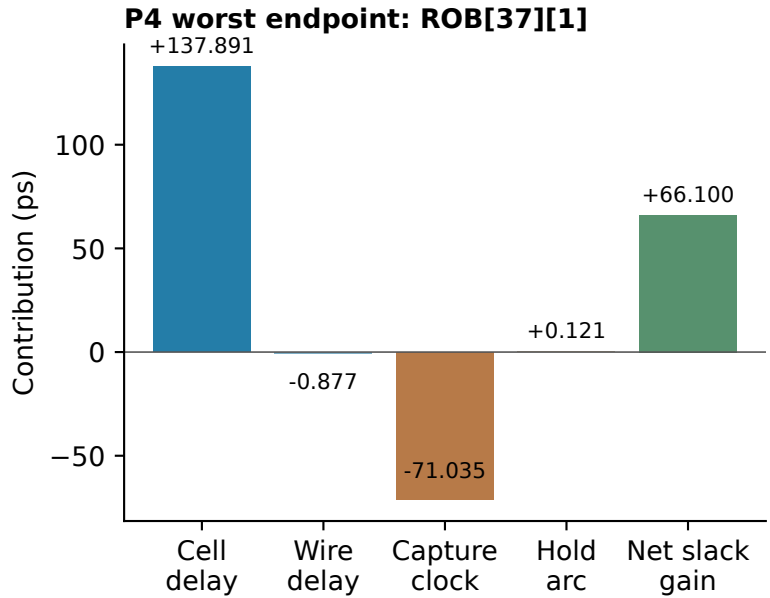

Matched input → D-pin paths; library hold contribution = −Δ(required − capture clock). Models change from estimated to extracted RC.