

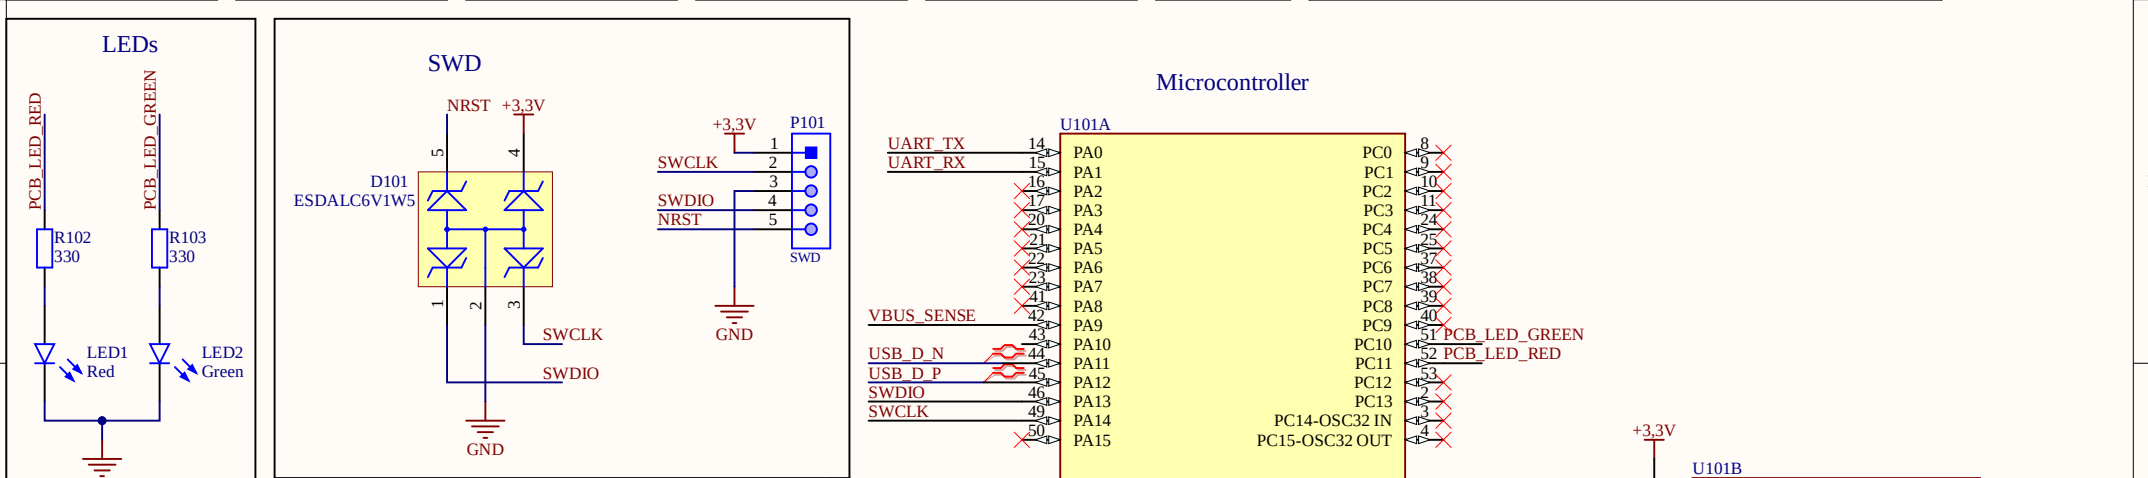
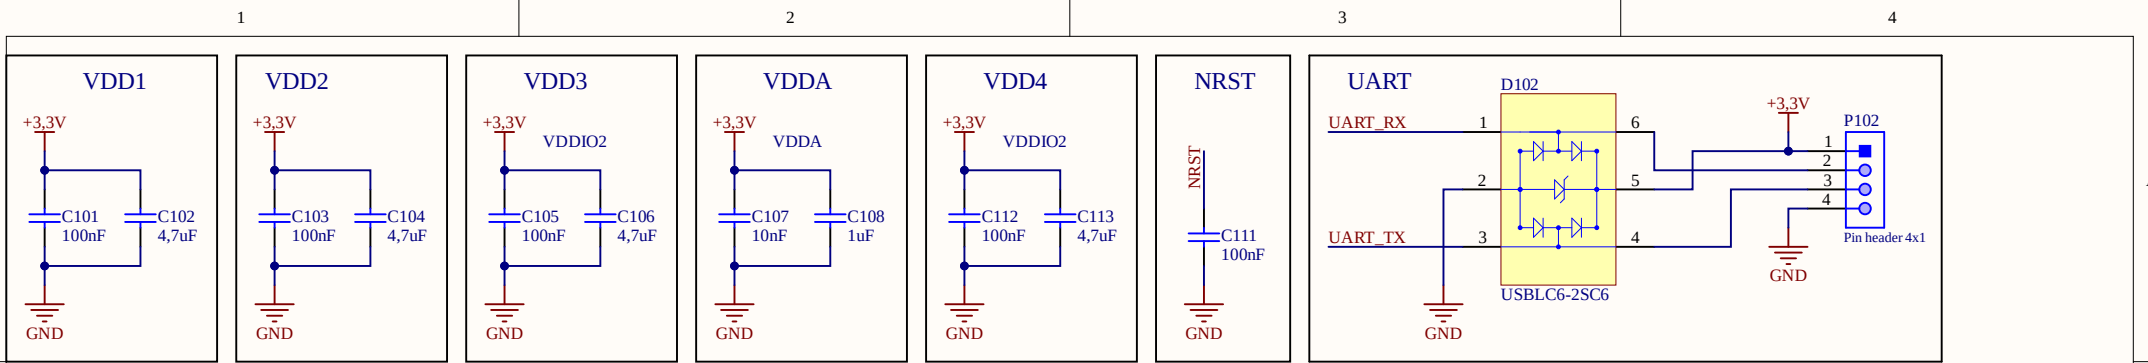
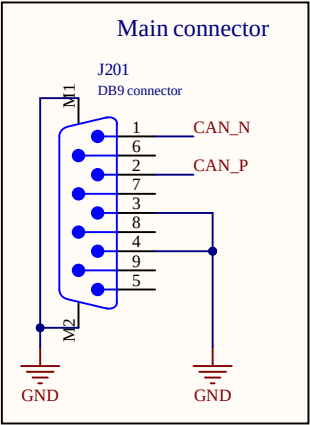


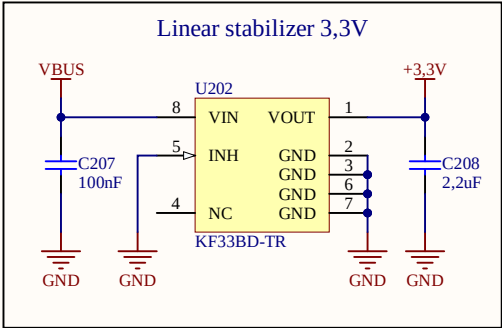


Linear stabilizer KF33BD-TR
Max input voltage for module 20V
Dropout voltage: 0,4 V
Output voltage: 3.3V
Module directly powered from USB

	PROJECT:	Diagnostic Unit
	CODENAME:	MCS_diag
	AUTHOR:	Krystian Sosin
PRINT DATE:	6/30/2026	SHEET: MCS_diag_ps.SchDoc


CAN transceiver

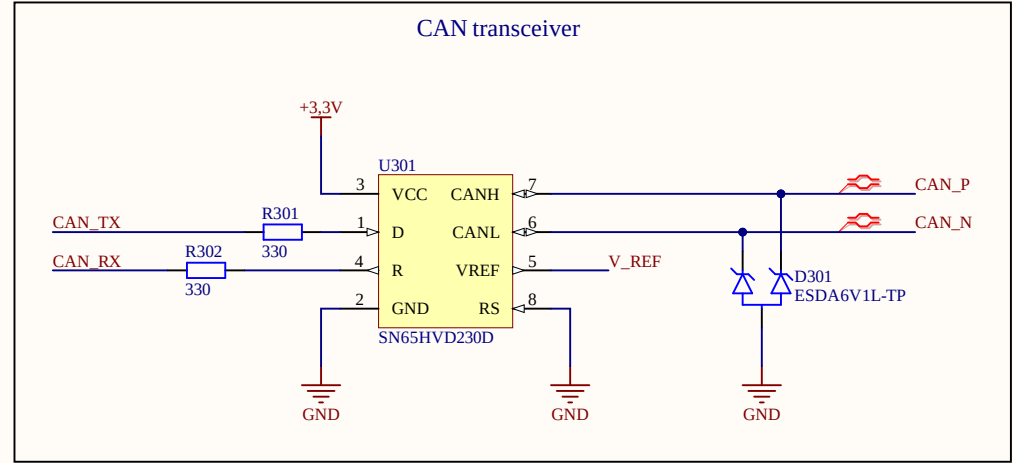

Split termination

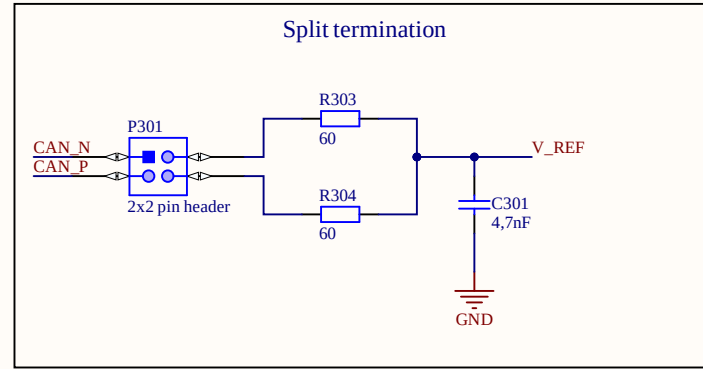

Power supply decoupling

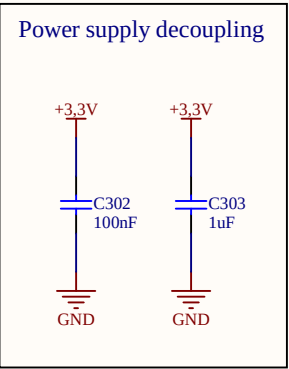


To correctly set differential pair nets should be mapped as:
CAN_H -> CAN_P
CAN_L -> CAN_N



PROJECT:	Diagnostic Unit
CODENAME:	MCS_diag
AUTHOR:	Krystian Sosin
PRINT DATE:	6/30/2026
SHEET:	MCS_diag_CAN.SchDoc

USB Connection

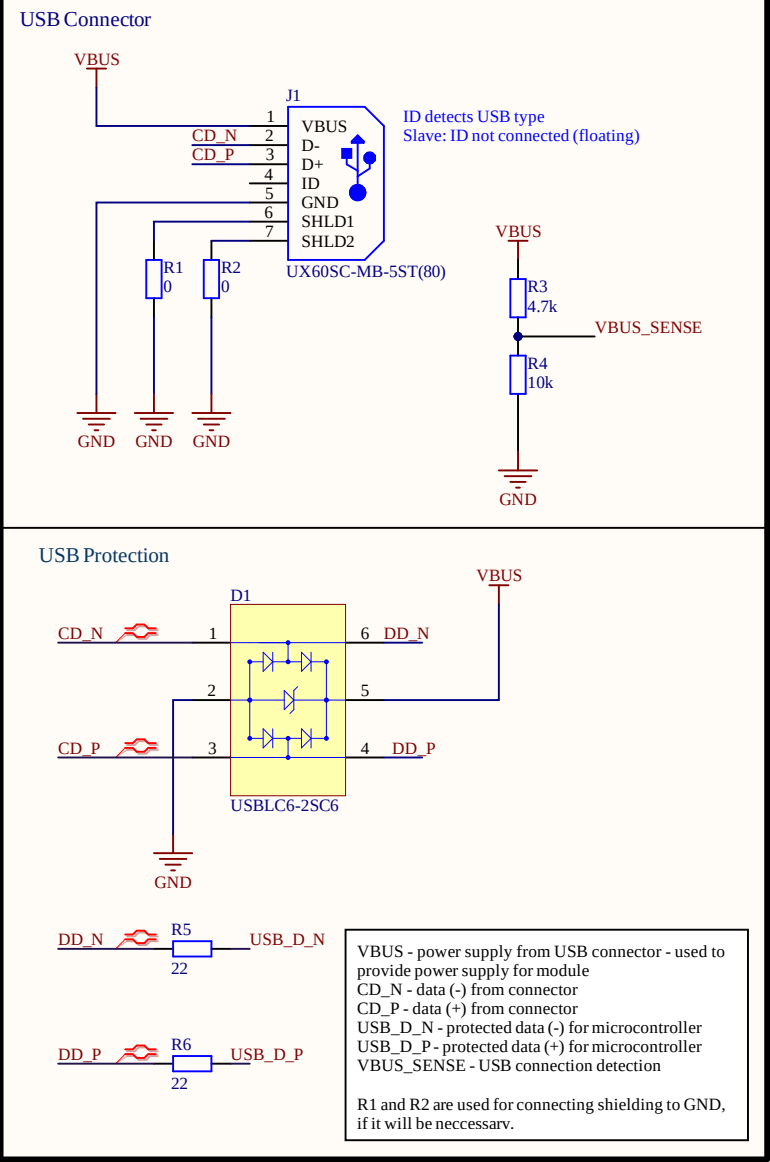

PROJECT:	Diagnostic Unit
CODENAME:	MCS_diag
AUTHOR:	Krystian Sosin
PRINT DATE:	6/30/2026
SHEET:	MCS_diag_USB.SchDoc