OptoSupply
Light It Up

5mm Ultra Red & Blue & Pure Green LED

OSTA5131A-R/PG/B

Common Cathode Type


▪Features

- High Luminous Output
- 5mm Standard Directivity
- UV Resistant Epoxy
- Water Clear Type

▪Applications

- Toys
- Games
- Audio

▪Outline Dimension

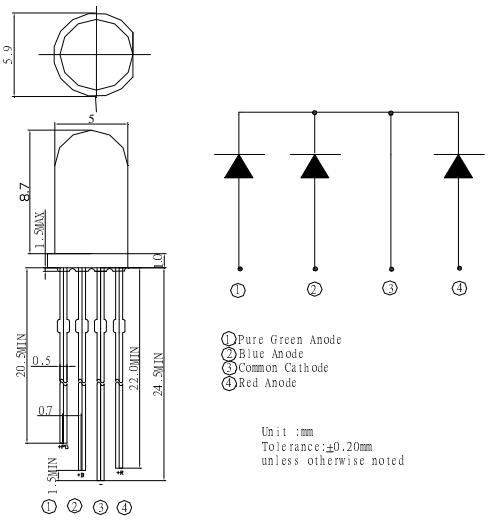


▪Absolute Maximum Rating (Each Color) (Ta=25℃)

Item	Symbol	Value		Unit
		Red	Blue/Green	
DC Forward Current	I_F	30	30	mA
Pulse Forward Current#	I_{FP}	100	100	mA
Reverse Voltage	V_R	5	5	V
Power Dissipation	P_D	75	105	mW
Operating Temperature	Topr	-40 ~ +95		℃
Storage Temperature	Tstg	-40 ~ +100		℃
Lead Soldering Temperature	Tsol	260℃/5sec		-

#Pulse width Max.10ms Duty ratio max 1/10

▪Directivity

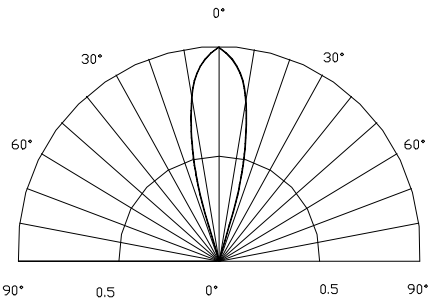

▪Electrical -Optical Characteristics (Ta=25℃)


Item	Symbol	Condition	Min.	Typ.	Max.	Unit
DC Forward Voltage*1	V_F (R)	I_F=20mA	-	2.0	2.5	V
	V_F (B/G)	I_F=20mA	-	3.6	4.2	V
DC Reverse Current	I_R	V_R=5V	-	-	30	μA
Domi. Wavelength*2	**λ_D(Red)**	I_F=20mA	-	635	-	nm
	λ_D(Green)	I_F=20mA	-	525	-	nm
	λ_D(Blue)	I_F=20mA	-	470	-	nm
Luminous Intensity*3	**Iv(Red)**	I_F=20mA		2000	-	mcd
	Iv(Green)	I_F=20mA		7000	-	mcd
	Iv(Blue)	I_F=20mA		2500	-	mcd
50% Power Angle	$2\theta_{1/2}$	I_F=20mA	-	30	-	deg


*1 Tolerance of measurements of forward voltage is ±0.1V
*2 Tolerance of measurements of dominant wavelength is ±1nm
*3 Tolerance of measurements of luminous intensity is ±15%


5mm Ultra Red & Blue & Pure Green LED


OSTA5131A-R/PG/B
Common Cathode Type


TYPICAL ELECTRICAL/OPTICAL CHARACTERISTIC CURVES

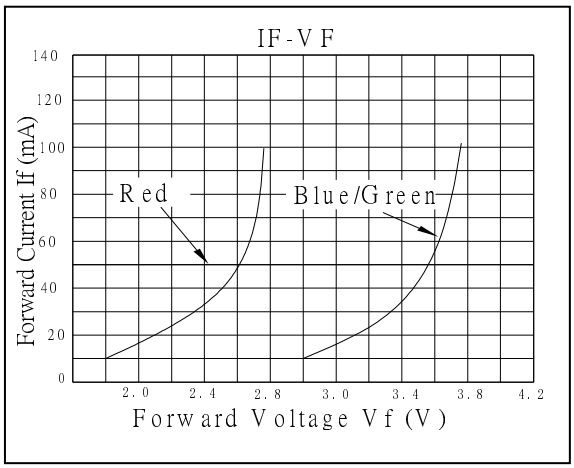


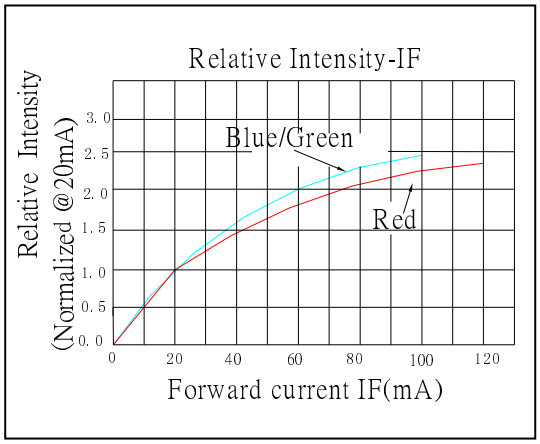

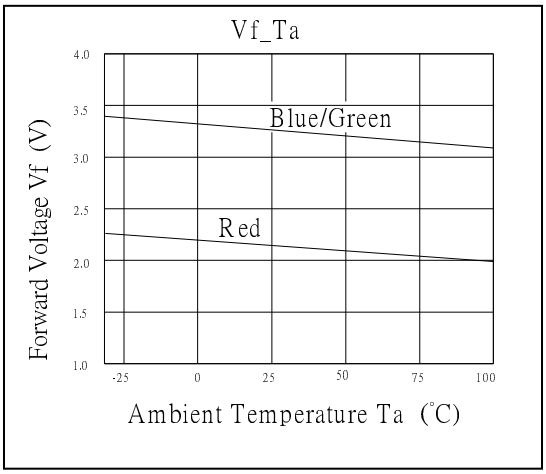

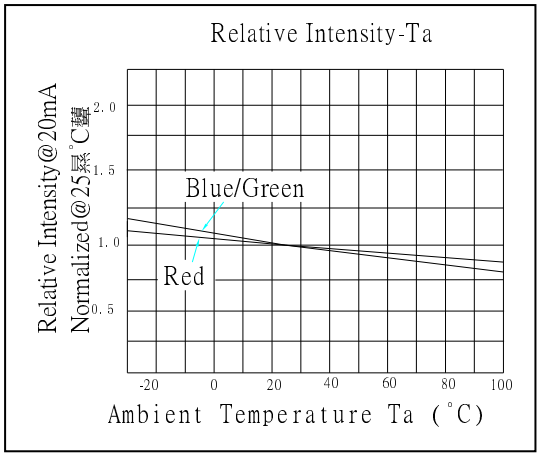

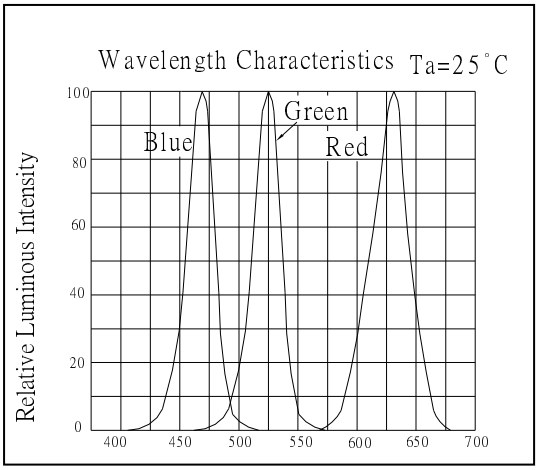

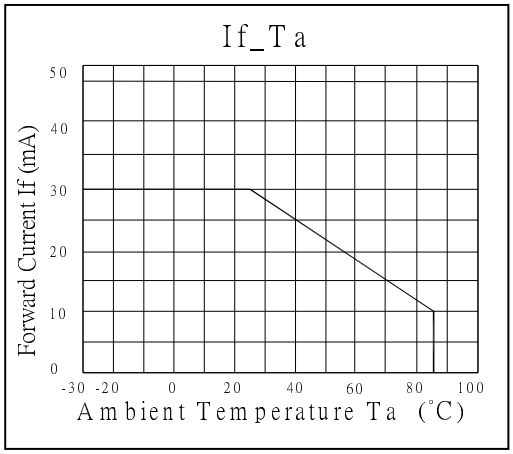

CNAS IAF ISO 9001: 2008
RoHS Compliant EU 2002/95/EC
REACH The new EU chemicals legislation
ATTENTION
OBSERVE PRECAUTIONS
ELECTROSTATIC
SENSITIVE DEVICES