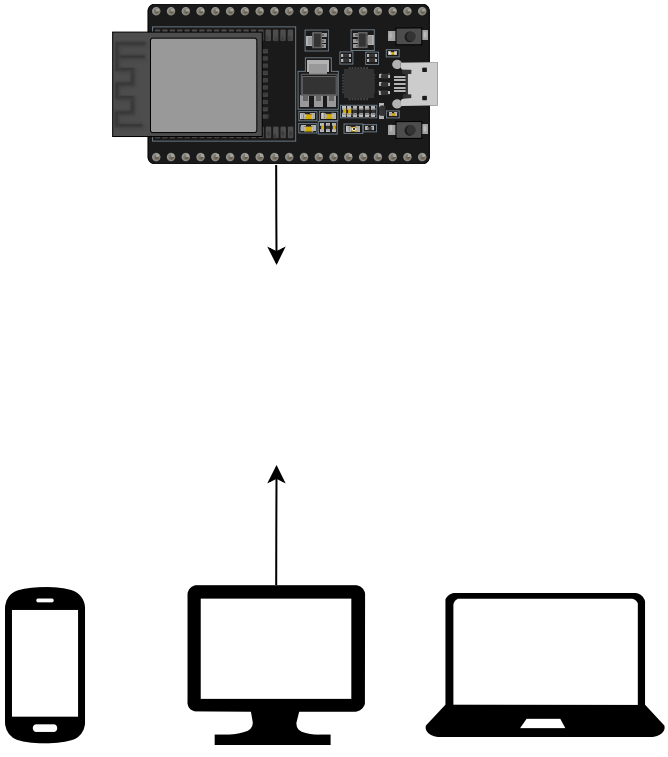

ESP32
(Publisher)



(Subscriber 1) (Subscriber 2) (Subscriber 3)

- Always connected
- Two way communication
- Subscribers get updates in real time

MQTT (Publish - Subscribe)



REST (Request - Response)

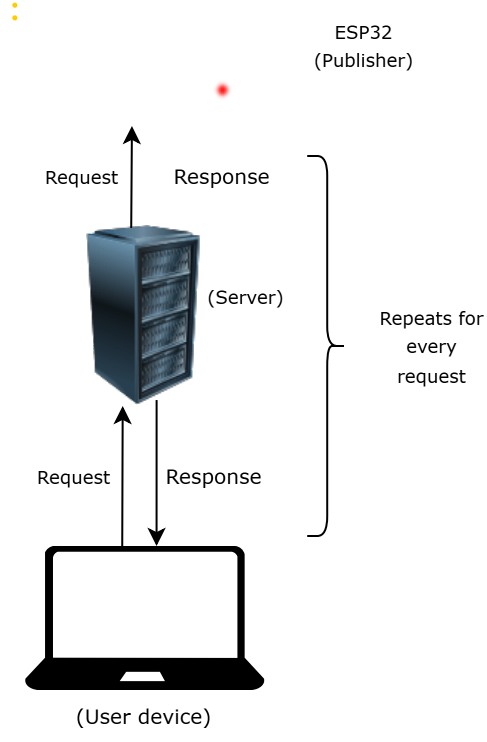

- The latency is higher compared to MQTT
- Polling is required for updating the data