


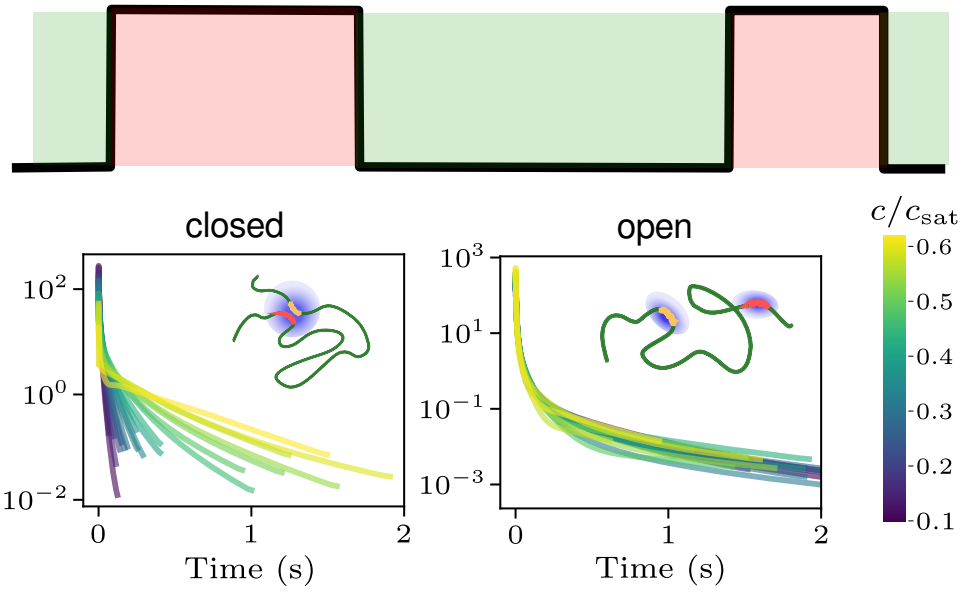


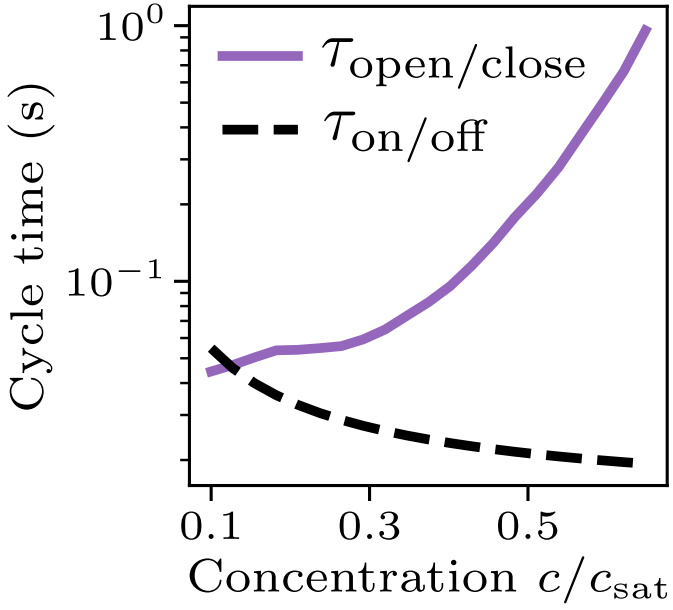

$$\dot{\mathcal{F}}(\phi) = \frac{\mathcal{F}_{\mathrm{open}}(\phi) + \mathcal{F}_{\mathrm{closed}}(\phi)}{\tau_{\mathrm{open/close}}}$$

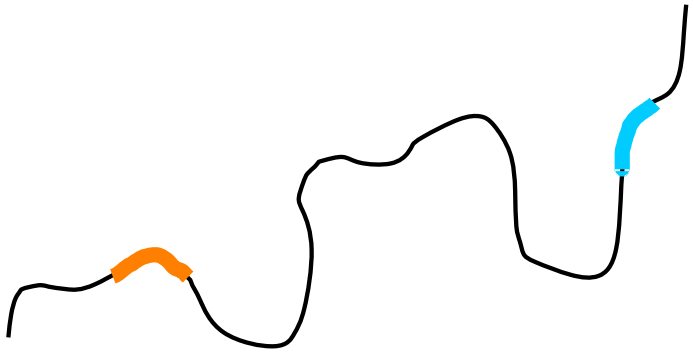

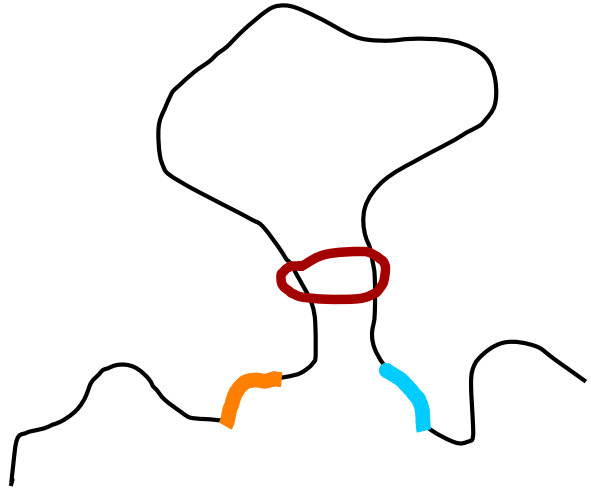

Loop extrusion decreases cycle time -> can only help sensitivity