20220718 Apollo压测下载配置接口

客户端参数: 线程数10,并发数200,持续时间3600s

请求参数: wrk -t10 -c200 -d3600s --latency https://mate.ssc.shopeemobile.com/configs/CAT/default/application


结果:

```
~ wrk -t10 -c200 -d3600s --latency https://mate.ssc.shopeemobile.com/configs/CAT/default/application
Running 60m test @ https://mate.ssc.shopeemobile.com/configs/CAT/default/application
 10 threads and 200 connections
                                          +/- Stdev
 Thread Stats
                Avg
                          Stdev
                                    Max
    Latency
              66.08ms
                         61.12ms
                                   1.71s
                                            90.97%
                         97.82
                                 680.00
                                            87.20%
   Req/Sec
             377.83
 Latency Distribution
          47.11ms
    75%
          49.74ms
    90% 111.11ms
    99% 298.67ms
 12956446 requests in 60.00m, 7.07GB read
 Socket errors: connect 0, read 303, write 0, timeout 544
Requests/sec:
                3598.95
                   2.01MB
Transfer/sec:
```

POD监控



QPS:

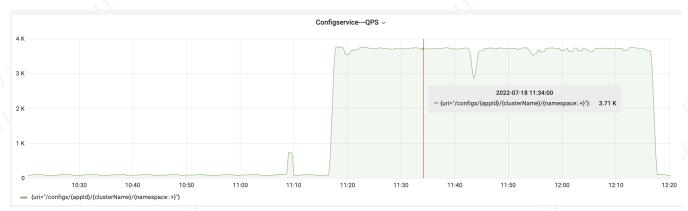

影响:无影响。