


| REV | DATE | DESCRIPTION |
|---|---|---|
| A | 2026-10-26 | INITIAL RELEASE |




SIDE

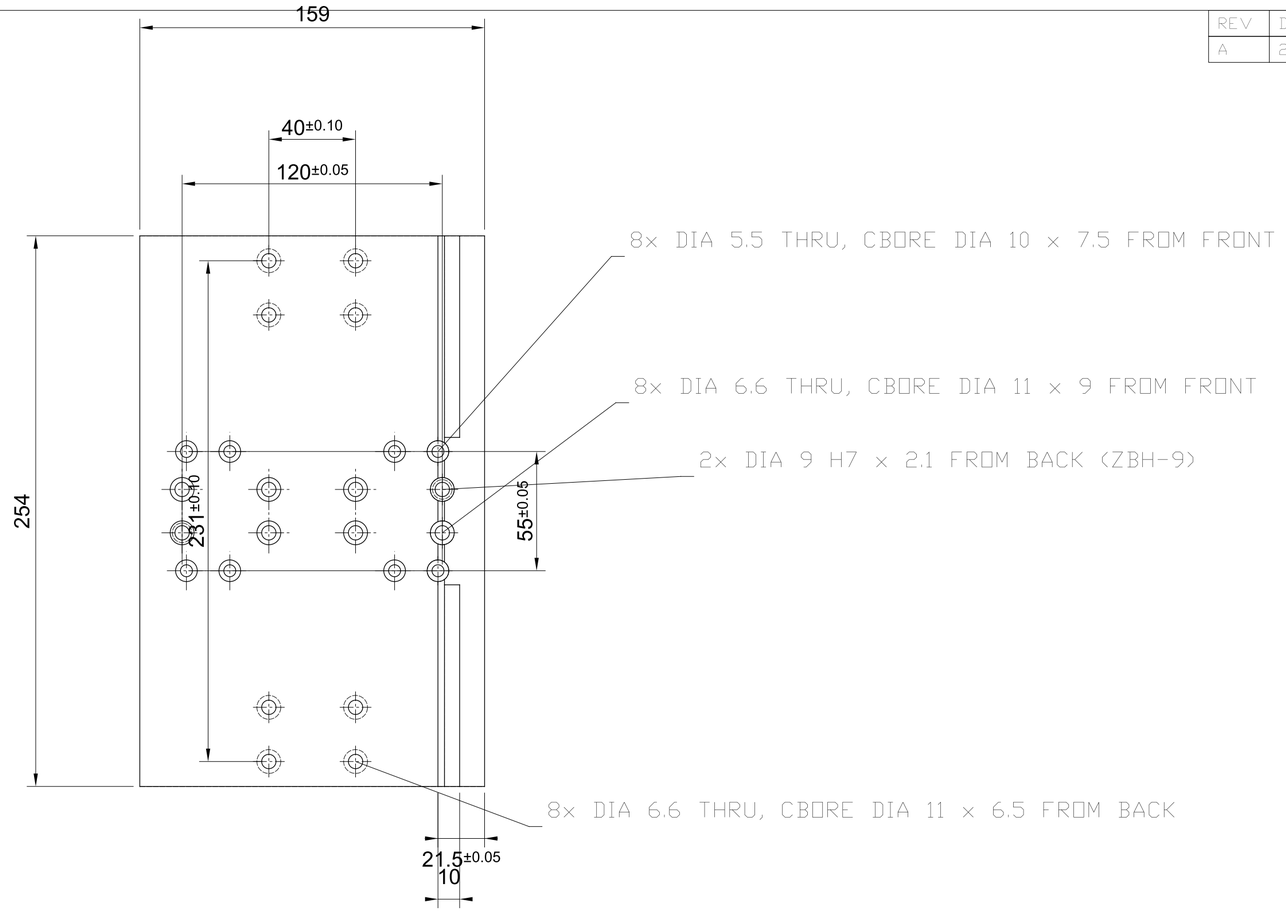


FRONT FACE (CARRIED AXIS SIDE)



ISOMETRIC 1:6

NOTES:
1. TOLERANCES PER ISO 2768-mK UNLESS OTHERWISE SPECIFIED.
2. MATERIAL EN AW-6082-T6 (ALT. 6061-T6) PLATE. ANODIZED NATURAL 10–15 µm; H7 BORES REAMED AFTER ANODIZING.
3. MASS 1.80 kg. ORIGIN = EGC-120 SLIDE HOLE PATTERN CENTRE ON THE BACK FACE.
4. BACK FACE (ON EGC-120 SLIDE) AND FRONT FACE X = 17 (EGC-120 PROFILE): FLATNESS 0.02, PARALLEL 0.03.
5. BREAK EDGES 0.3, INNER CORNERS R <= 1.
6. BASE: 8× ISO 4762 M5×16 FROM THE FRONT + 8× M6×16 (2 THRU ZBH-9), FITTED BEFORE THE CARRIED AXIS.
7. CARRIED: 8× ISO 4762 M6×20 FROM THE BACK INTO NST-8-M6 SLOT NUTS.
8. LEDGE 4 HIGH ALONG ONE EGC-120 PROFILE SIDE (SQUARES IT); ITS UPPER END HEAD ABOVE THE PLATE.
9. RELIEF GROOVE 3 × 1.5 IN THE FRONT FACE ALONG THE LEDGE (PROFILE EDGE).
10. ZBH-9 BORES AT (Y, Z) = (60, 10) AND (−60, −10).

| ADAPTER PLATE 120/120 | SCALE 1:2 MM THIRD ANGLE |
|---|---|
| BR-EGC-120-EGC-120-2 | SHEET 1 OF 1 REV A drawing |