


REV	DATE	DESCRIPTION
A	2026-10-26	INITIAL RELEASE



SIDE

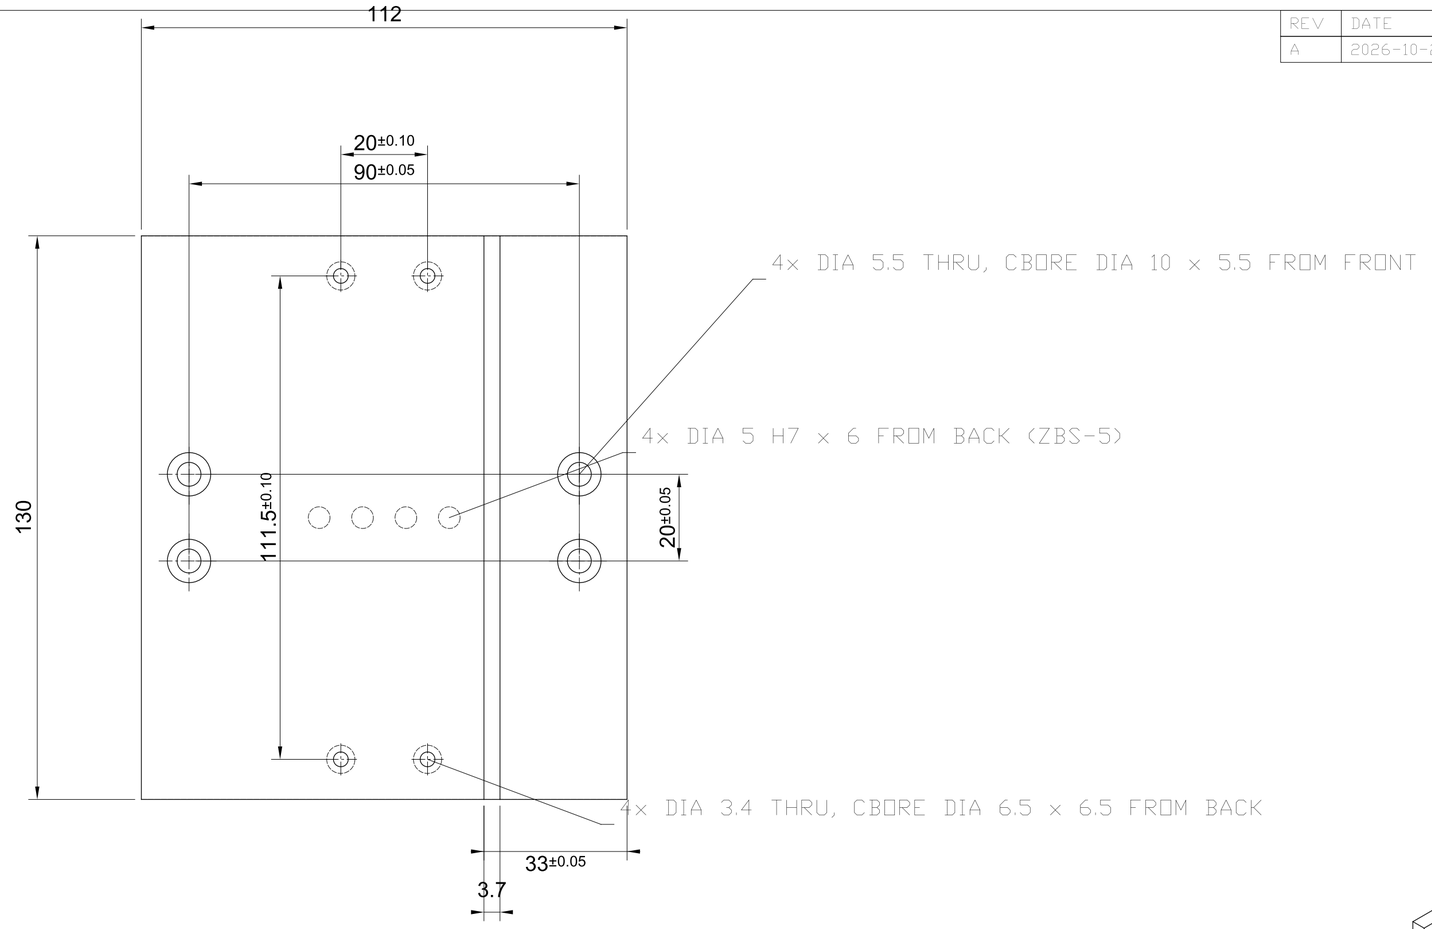

FRONT FACE (CARRIED AXIS SIDE)



ISOMETRIC 1:3

NOTES:
1. TOLERANCES PER ISO 2768-mK UNLESS OTHERWISE SPECIFIED.
2. MATERIAL EN AW-6082-T6 (ALT. 6061-T6) PLATE. ANODIZED NATURAL 10–15 um; H7 BORES REAMED AFTER ANODIZING.
3. MASS 0.43 kg. ORIGIN = EGC-70 SLIDE HOLE PATTERN CENTRE ON THE BACK FACE.
4. BACK FACE (ON EGC-70 SLIDE) AND FRONT FACE X = 11 (EGC-50 PROFILE): FLATNESS 0.02, PARALLEL 0.03.
5. BREAK EDGES 0.3, INNER CORNERS R <= 1.
6. BASE: 4× ISO 4762 M5×12 FROM THE FRONT + 2× ZBS-5 PINS, FITTED BEFORE THE CARRIED AXIS.
7. CARRIED: 4× ISO 4762 M3×8 FROM THE BACK INTO ABAN-3-1 M3-4-M-P SLOT NUTS.
8. LEDGE 4 HIGH ALONG ONE EGC-50 PROFILE SIDE (SQUARES IT); ITS UPPER END HEAD ABOVE THE PLATE.
9. ZBS-5 BORES AT Z = 0, Y = -15, -5, 5, 15 (2 OF THEM USED, EITHER WAY ROUND).

ADAPTER PLATE 70/50	SCALE 1:1 MM THIRD ANGLE
BR-EGC-70-EGC-50-2	SHEET 1 OF 1 REV A drawing