


REV	DATE	DESCRIPTION
A	2026-10-24	INITIAL RELEASE
B	2026-10-25	BACK WALL ACCESS SLOTS (WERE HOLES)

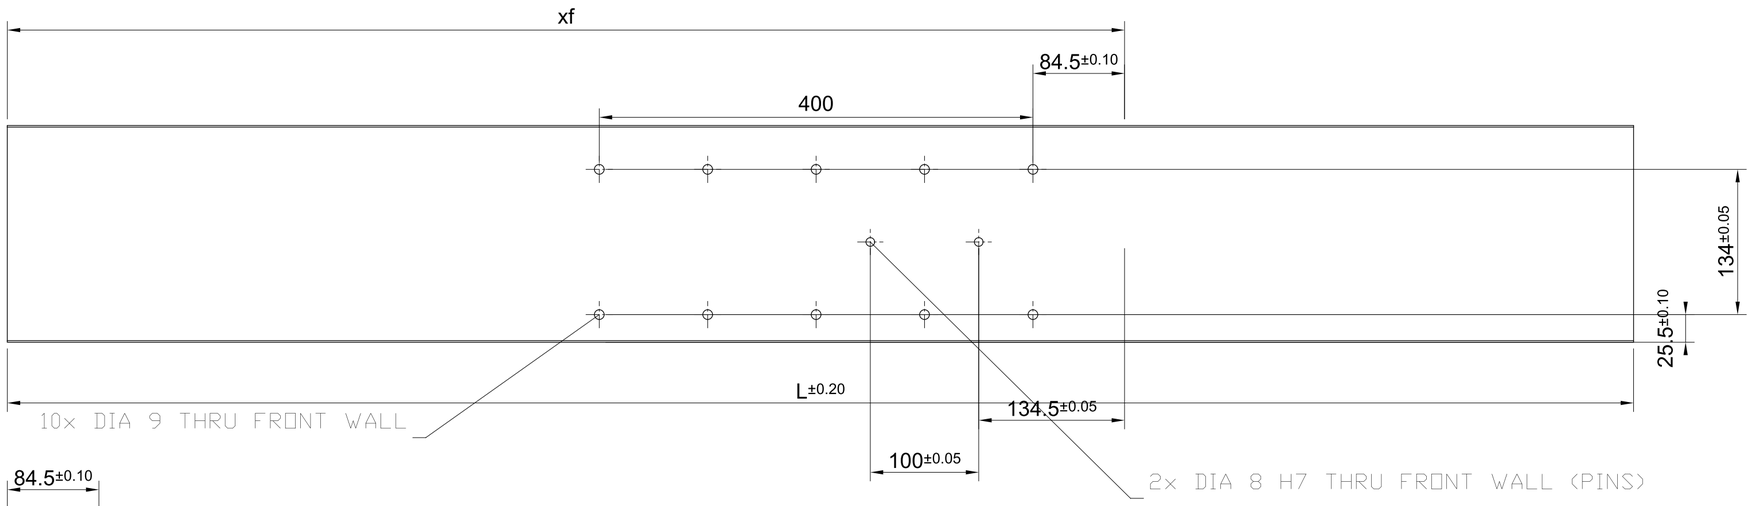


FRONT (Y SIDE)



RIGHT (END B)

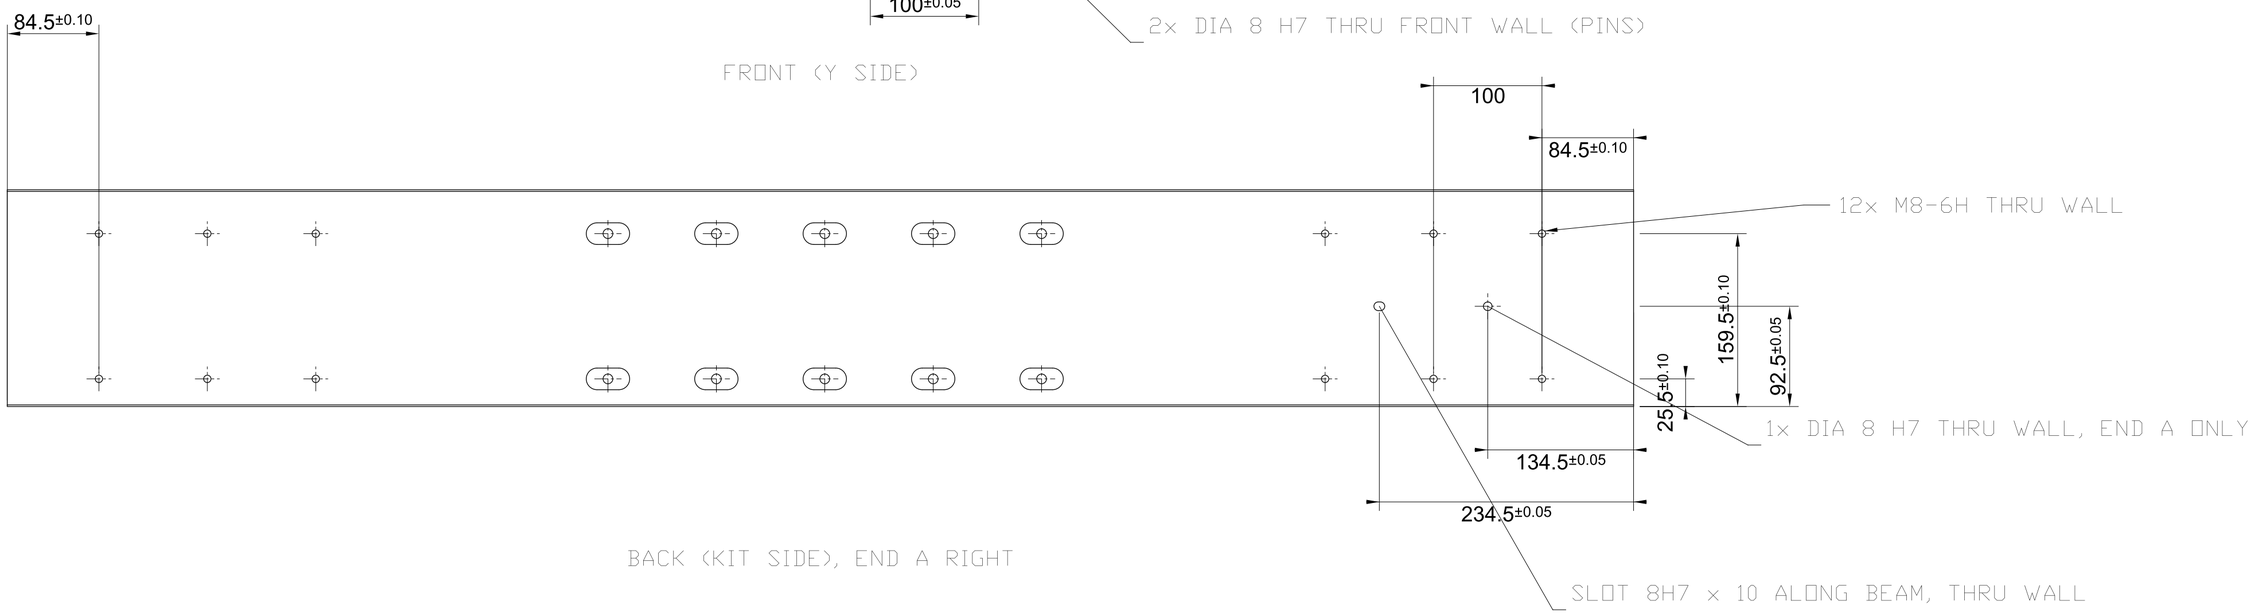

BACK (KIT SIDE), END A RIGHT



ISOMETRIC 1:20

NOTES:
1. TOLERANCES PER ISO 2768-mK UNLESS OTHERWISE SPECIFIED.
2. L = D − 127 (D = X AXIS SPACING), L 615 … 1950, TOL +−0.2. DRAWN AT L = 1500.
3. STOCK EN AW-6082-T6 RECT. TUBE 200×80×10 (EN 755-9), 14.01 kg/m, INNER CORNER R <= 4.
4. BACK FACE (KIT SIDE) AND FRONT FACE (Y SIDE) MACHINED, FLATNESS 0.05.
5. BACK ENDS = ELGT-BS-160 PROFILE PATTERN FOR EHAM-AK-L9-160-L9-160-ML/-MR; END A PINNED, END B SCREWS ONLY.
6. FRONT = ELGT-BS-160 PROFILE UNDERSIDE: Y CENTRE AT L/2 + Y_POS, DRIVE FLANGE xf = L/2 + Y_POS + (STROKE + 261)/2.
7. Y SCREW HOLES AT xf − (84.5 + k × 100), k = 0,1,2 AND kmax−2 … kmax, kmax = INT((STROKE + 100)/100).
8. DRAWN FOR Y STROKE 300, Y_POS 0 (xf = 1030.5). Y SCREWS ISO 4762 M8×20 + ISO 7092 WASHER, HEADS INSIDE.
9. BACK WALL: ACCESS SLOTS 20 × 40 (LONG ALONG THE BEAM) THRU, CENTRED ON THE Y SCREW HOLES, EDGES C0.5.
10. Y PINS ISO 8734 8×18 PRESSED IN FRONT WALL. FINISH ANODIZED NATURAL 10–15 µm; H7 REAMED AFTER ANODIZING.

Y BEAM X160 / Y160	SCALE 1:4 MM THIRD ANGLE
BR-ELGT-BS-160-ELGT-BS-160-2	SHEET 1 OF 1 REV B drawing