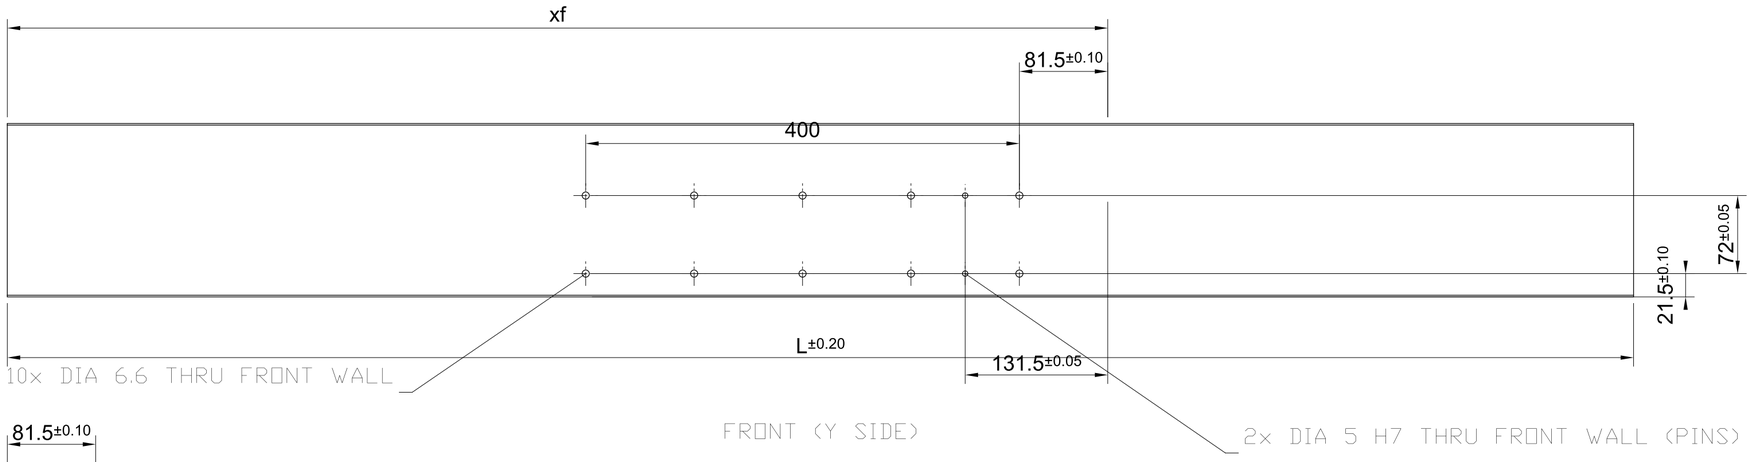

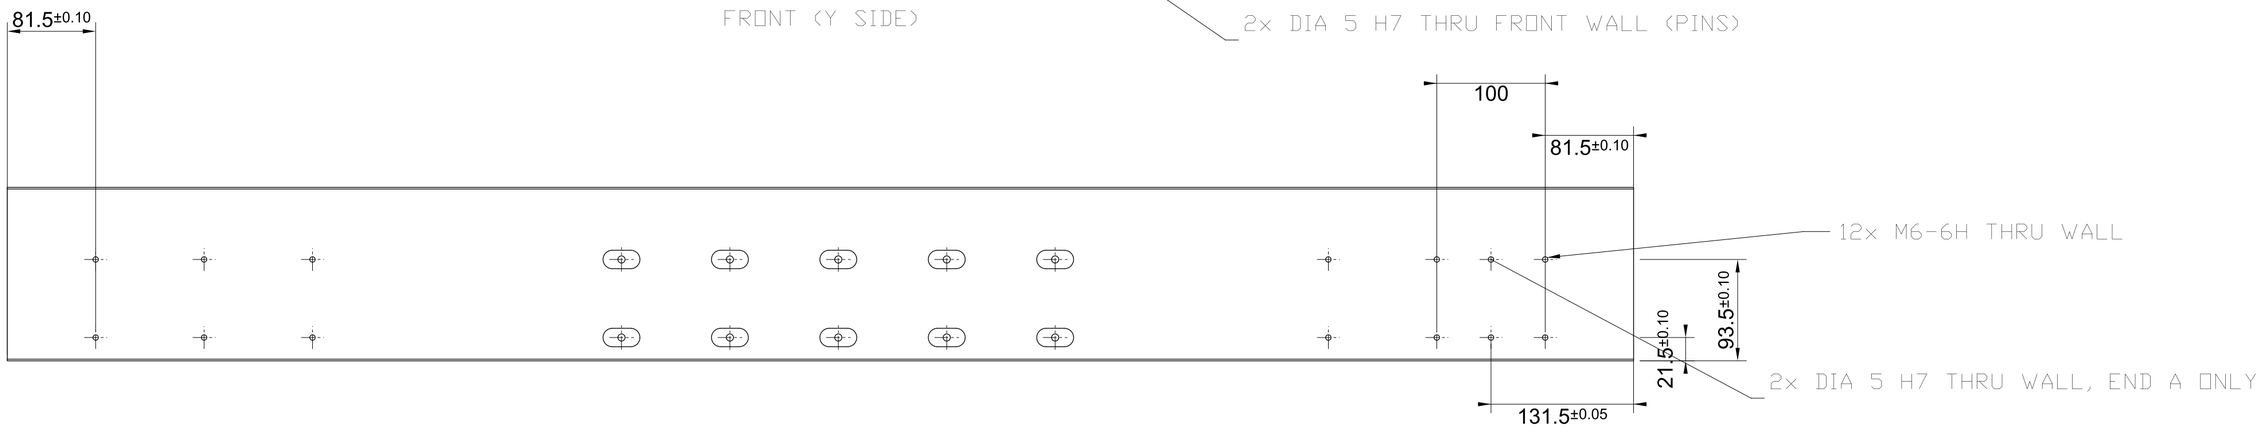
| REV | DATE | DESCRIPTION |
|---|---|---|
| A | 2026-10-24 | INITIAL RELEASE |
| B | 2026-10-25 | BACK WALL ACCESS SLOTS (WERE HOLES) |





FRONT (Y SIDE)




RIGHT (END B)




BACK (KIT SIDE), END A RIGHT



ISOMETRIC 1:20

NOTES:
1. TOLERANCES PER ISO 2768-mK UNLESS OTHERWISE SPECIFIED.
2. L = D - 21 (D = X AXIS SPACING), L 609 … 2200, TOL +-0.2. DRAWN AT L = 1500.
3. STOCK EN AW-6082-T6 RECT. TUBE 160x80x8 (EN 755-9), 9.68 kg/m.
4. BACK FACE (KIT SIDE) AND FRONT FACE (Y SIDE) MACHINED, FLATNESS 0.05.
5. BACK ENDS = ELGT-BS-90 PROFILE PATTERN FOR EHAM-AK-L9-90-L9-90-ML/-MR; END A PINNED, END B SCREWS ONLY.
6. FRONT = ELGT-BS-90 PROFILE UNDERSIDE: Y CENTRE AT L/2 + Y_POS, DRIVE FLANGE xf = L/2 + Y_POS + (STROKE + 230)/2.
7. Y SCREW HOLES AT xf - (81.5 + k x 100), k = 0,1,2 AND kmax-2 … kmax, kmax = INT((STROKE + 100)/100).
8. DRAWN FOR Y STROKE 300, Y_POS 0 (xf = 1015). Y SCREWS ISO 4762 M6x16 + ISO 7092 WASHER, HEADS INSIDE.
9. BACK WALL: ACCESS SLOTS 17 x 34 (LONG ALONG THE BEAM) THRU, CENTRED ON THE Y SCREW HOLES, EDGES C0.5.
10. Y PINS ISO 8734 5x12 PRESSED IN FRONT WALL. FINISH ANODIZED NATURAL 10-15 um; H7 REAMED AFTER ANODIZING.

| | |
|---|---|
| Y BEAM X90 / Y90 | SCALE 1:4 MM THIRD ANGLE |
| BR-ELGT-BS-90-ELGT-BS-90-2 | SHEET 1 OF 1 REV B drawing |