


REV	DATE	DESCRIPTION
A	2026-10-26	INITIAL RELEASE
B	2026-10-27	GUSSETS REVISED

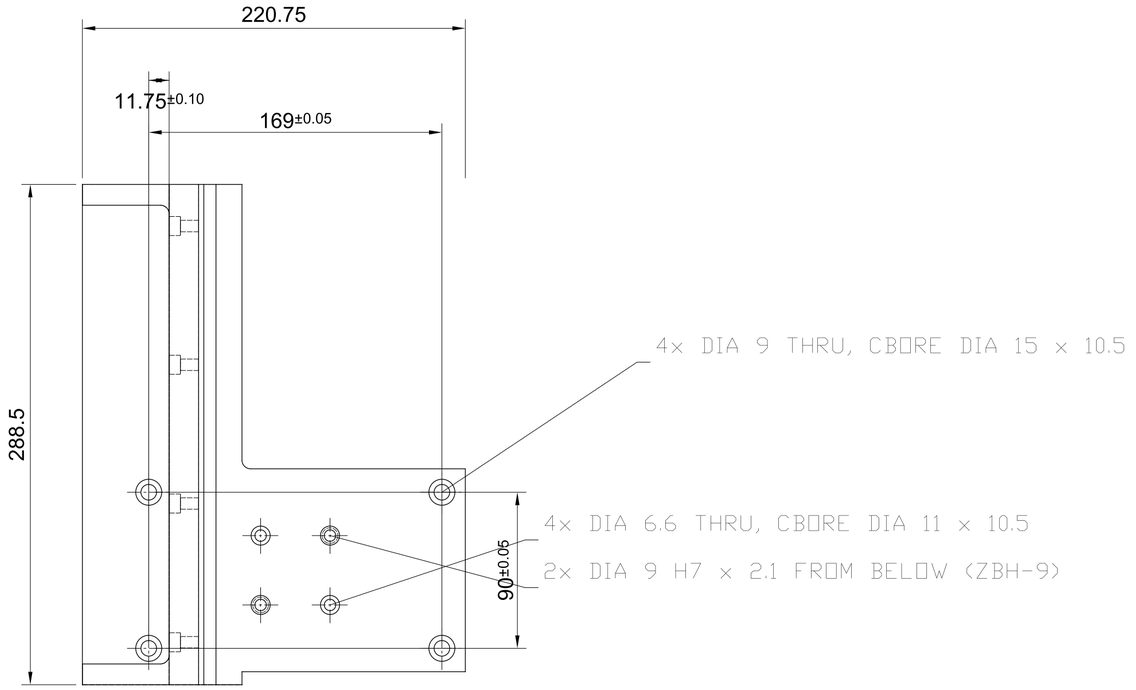


TOP



ISOMETRIC 1:5.13

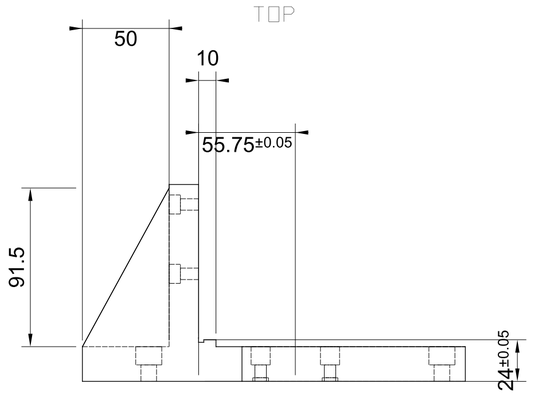

FRONT

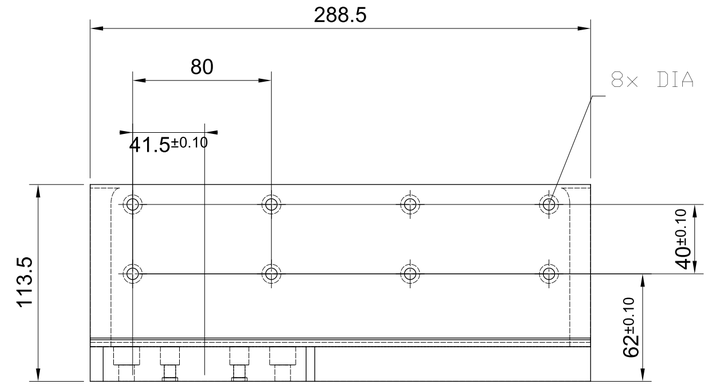

RIGHT

NOTES:
1. TOLERANCES PER ISO 2768-mK UNLESS OTHERWISE SPECIFIED.
2. MATERIAL EN AW-6082-T6 (ALT. 6061-T6) PLATE. ANODIZED NATURAL 10-15 um; H7 BORES REAMED AFTER ANODIZING.
3. DRAWN: BR-EGC-185-EGC-120-1-ML. BR-EGC-185-EGC-120-1-MR = MIRROR IMAGE (Y -> -Y), SAME DIMENSIONS. MASS 3.60 kg EACH.
4. FOOT UNDERSIDE (ON EGC-185 SLIDE) AND WALL FACE X = -55.75 (CARRIED PROFILE): FLATNESS 0.02,
5. WALL FACE PERPENDICULAR TO FOOT UNDERSIDE 0.03; LEDGE TOP Z = 24 PARALLEL TO FOOT UNDERSIDE 0.03.
6. ORIGIN = SLIDE HOLE PATTERN CENTRE (BETWEEN THE CENTRING BORES). BREAK EDGES 0.3, INNER CORNERS R <= 1.
7. FOOT: 4x ISO 4762 M8x20 + 4x M6x20 (2 THRU ZBH-9) INTO THE SLIDE, FITTED BEFORE THE CARRIED AXIS.
8. WALL: 8x ISO 4762 M6x20 INTO NST-8-M6 SLOT NUTS (EGC-120 UNDERSIDE SLOTS).
9. CARRIED AXIS SIDE FACE ON THE LEDGE, ITS NEAR END HEAD BEHIND THE WALL END (Y < -66).
10. 2x GUSSET t = 12 AT THE WALL ENDS, Y = -66 … -54 / 210.5 … 222.5, 50 DEEP, TO Z = 111.5; CLEAR OF EVERY COUNTERBORE.
11. RELIEF GROOVE 3 x 1.5 AT THE WALL ROOT ALONG THE LEDGE (PROFILE EDGE).
12. ZBH-9 BORES AT (X, Y) = (20, 20) AND (-20, -20).

ANGLE BRACKET 185/120	SCALE 1:2.5 MM THIRD ANGLE
BR-EGC-185-EGC-120-1-ML	SHEET 1 OF 1 REV B drawing