


REV	DATE	DESCRIPTION
A	2026-10-26	INITIAL RELEASE
B	2026-10-27	GUSSETS REVISED

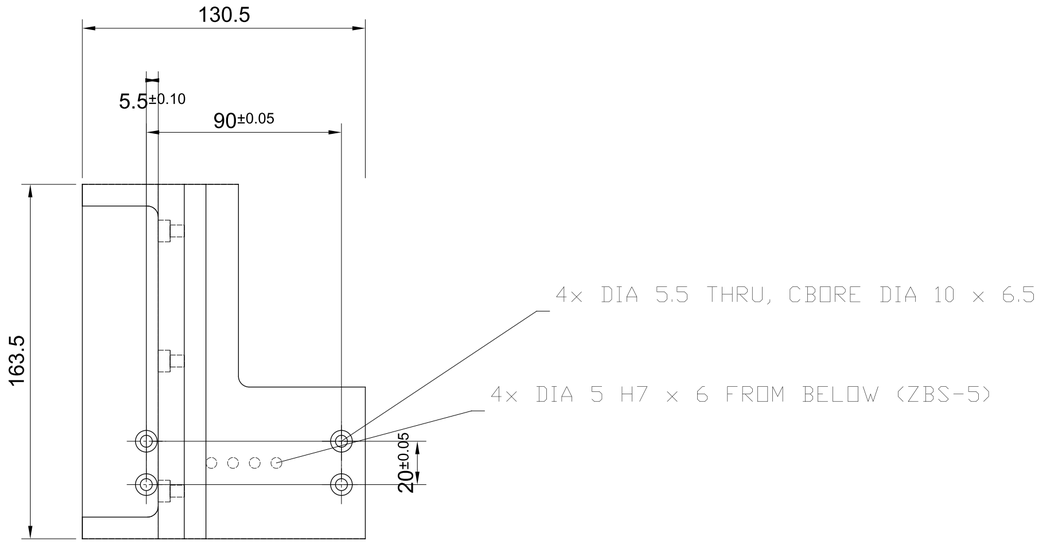


TOP



ISOMETRIC 1:2.78

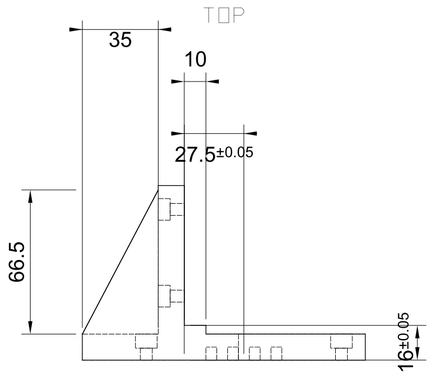

FRONT

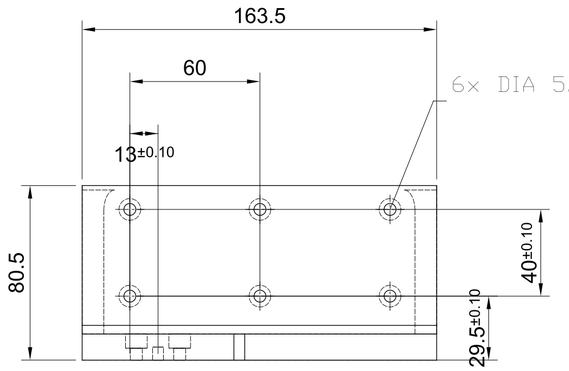

RIGHT

NOTES:
1. TOLERANCES PER ISO 2768-mK UNLESS OTHERWISE SPECIFIED.
2. MATERIAL EN AW-6082-T6 (ALT. 6061-T6) PLATE. ANODIZED NATURAL 10-15 um; H7 BORES REAMED AFTER ANODIZING.
3. DRAWN: BR-EGC-70-EGC-70-1-ML. BR-EGC-70-EGC-70-1-MR = MIRROR IMAGE (Y -> -Y), SAME DIMENSIONS. MASS 0.94 kg EACH.
4. FOOT UNDERSIDE (ON EGC-70 SLIDE) AND WALL FACE X = -27.5 (CARRIED PROFILE): FLATNESS 0.02,
5. WALL FACE PERPENDICULAR TO FOOT UNDERSIDE 0.03; LEDGE TOP Z = 16 PARALLEL TO FOOT UNDERSIDE 0.03.
6. ORIGIN = SLIDE HOLE PATTERN CENTRE (BETWEEN THE CENTRING BORES). BREAK EDGES 0.3, INNER CORNERS R <= 1.
7. FOOT: 4x ISO 4762 M5x12 + 2x ZBS-5 PINS INTO THE SLIDE, FITTED BEFORE THE CARRIED AXIS.
8. WALL: 6x ISO 4762 M5x12 INTO NST-5-M5 SLOT NUTS (EGC-70 UNDERSIDE SLOTS).
9. CARRIED AXIS SIDE FACE ON THE LEDGE, ITS NEAR END HEAD BEHIND THE WALL END (Y < -35).
10. 2x GUSSET t = 10 AT THE WALL ENDS, Y = -35 … -25 / 118.5 … 128.5, 35 DEEP, TO Z = 78.5; CLEAR OF EVERY COUNTERBORE.
11. ZBS-5 BORES AT Y = 0, X = -15, -5, 5, 15 (2 OF THEM USED, EITHER WAY ROUND).

ANGLE BRACKET 70/70	SCALE 1:2 MM THIRD ANGLE
BR-EGC-70-EGC-70-1-ML	SHEET 1 OF 1 REV B drawing