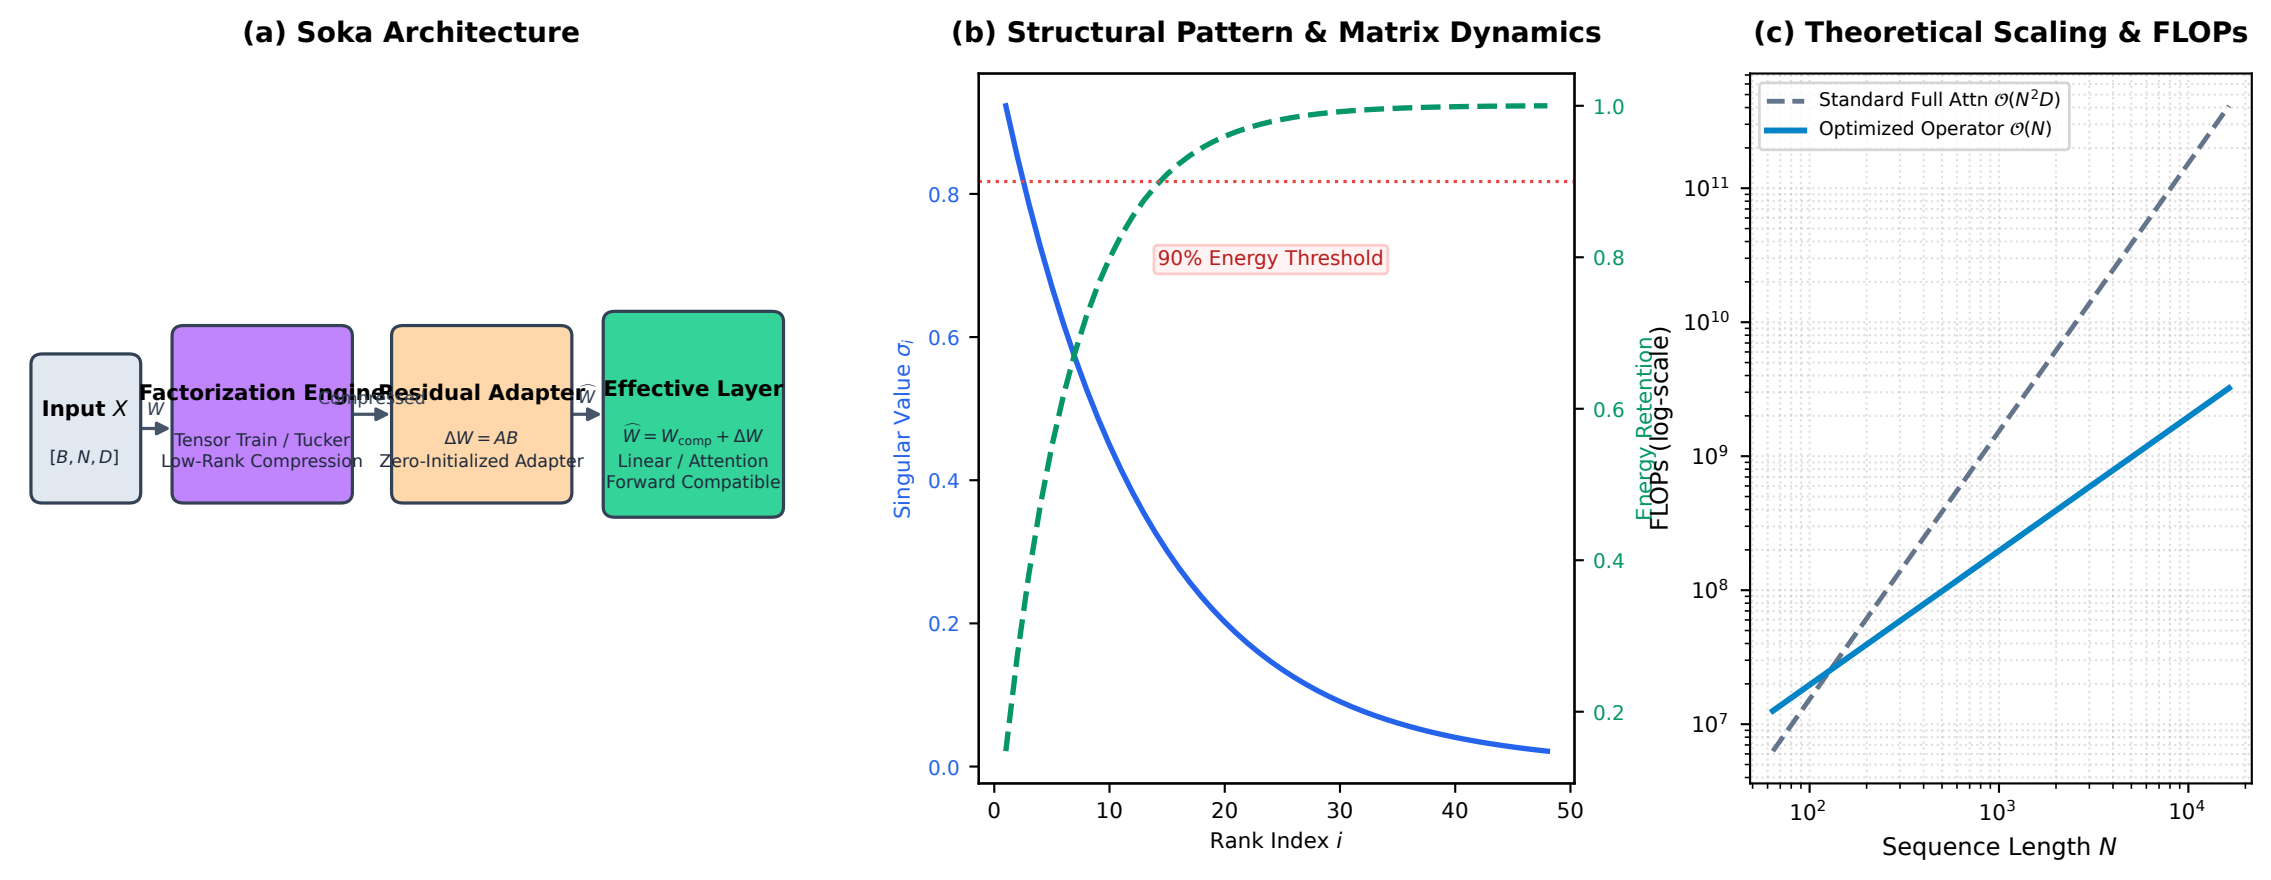
(a) Soka Architecture
Input $X$
$[B, N, D]$
$W$
Factorization Engine
Tensor Train / Tucker
Low-Rank Compression
Compressed
Residual Adapter
$\Delta W = AB$
Zero-Initialized Adapter
$\widehat{W}$
Effective Layer
$\widehat{W} = W_{\text{comp}} + \Delta W$
Linear / Attention
Forward Compatible
(b) Structural Pattern & Matrix Dynamics
Singular Value $\sigma_i$
Energy Retention
90% Energy Threshold
Rank Index $i$
0.0
0.2
0.4
0.6
0.8
1.0
0
10
20
30
40
50
(c) Theoretical Scaling & FLOPs
Standard Full Attn $\mathcal{O}(N^2D)$
Optimized Operator $\mathcal{O}(N)$
FLOPs (log-scale)
Sequence Length $N$
$10^7$
$10^8$
$10^9$
$10^{10}$
$10^{11}$
$10^2$
$10^3$
$10^4$